China2EU

china2eu.tech

STAGE LIGHTING & TRUSS

Add-luster to your stage



china2eu.tech

梦想 · 相信 · 实现

DREAM · BELIEVE · ACHIEVE

China2EU

光束灯系列

Beam Moving Head Light Series



SF-MW550

550W防水光束灯
550W Waterproof Beam Moving Light



技术参数

输入电压： AC110-240V,50/60Hz
色温:8000K
透镜:优质光学透镜
水平:540° 垂直:270°
光源:欧司朗550W
总功率:700W
防水等级:IP65
调光:0-100%
频闪:1-13次秒
调焦:电子调焦
净重： 26KG
控制模式:DMX512.RDM,自走， 主从， 声控，
内置灯体自动回位纠正功能
颜色盘:13种颜色+白光旋转
图案盘:17个固定国案片+白光
双棱镜:8+16楼镜或者8棱镜
产品尺寸： 45*35*75cm

Technical Parameters

Input voltage: AC110-240V,50/60Hz
Color temperature :8000K
Lens: High quality optical lens
Horizontal :540° Vertical :270°
Light source: OSram 550W
Total power :700W
Waterproof rating :IP65
Dimming :0-100%
Stroboscopic :1-13 seconds
Focusing: electronic focusing
Net weight: 26KG
Control mode :DMX512.RDM, self-walking,
master-slave, voice control,
Built-in light body automatic return correction function
Color plate :13 colors + white light rotation
Pattern plate :17 fixed national plates + white light
Double prism :8+16 floor mirror or 8 prism
Product size: 45*35*75cm





SF-MW480

480W防水光束灯
480W Waterproof Beam Moving Light





技术参数

输入电压： AC110-240V,50/60Hz
色温:8000K
透镜:进口光学透镜
水平:540°垂直:270°
光源:欧司朗440W
总功率:600W
防水等级:IP65
控制方式:DMX512信号控制
颜色盘:13种颜色+白光,
可双向变速彩虹效果旋转
图案盘:17个固定图案片+白光
雾化:一个雾化镜
双棱镜:8+16棱镜
或者8+48棱镜,双向变速旋转
重量:25kg
尺寸:30.5×40X69(cm)

Technical Parameters

Input voltage: AC110-240V,50/60Hz
Color temperature :8000K
Lens: Imported optical lens
Horizontal :540° Vertical :270°
Light source: OSram 440W
Total power :600W
Waterproof class :IP65
Control mode :DMX512 signal control
Color disk :13 colors + white light,
two-way variable rainbow effect rotation
Pattern plate :17 fixed pattern pieces + white light
Fogging: A fogging mirror
Double prism :8+16 prism or 8+48 prism,
two-way variable speed rotation
Weight :25kg
Size :30.5×40X69(cm)

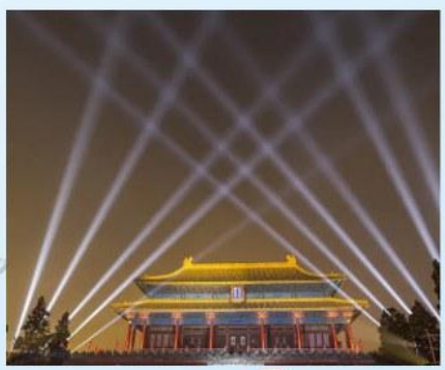

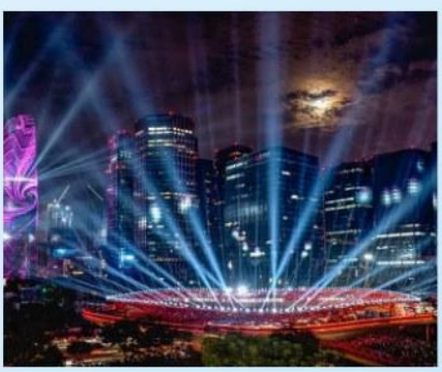

SF-MW420/380

420/380W防水光束灯
420/380W Waterproof Beam Light



技术参数

输入电压：AC100-240V 50/60Hz
功率：550W/600W
光源：OSRAM SIRIUS HRI 371W+/OSRAM SIRIUS HRI 421W
色温：7800K光束角度：1.5°
光学直径：190mm超大口径
颜色盘：1个颜色盘,14个颜色+白光,具有半色
效果盘：1个6色彩镜效果盘
调光：0-100%线性调光
频闪：独立式频闪（1-25Hz）
调焦：0-100%线性调焦
雾化系统：1个雾化镜
运动范围：X轴540°,Y轴270°
安装方式：可水平或垂直安装
灯体材质：全机身压铸铝合金外壳
防护等级：IP66
工作环境：-25～45℃
一装二外尺寸80*42*89含轮子高
一装一外尺寸45*42*89含轮子高

Technical Parameters

Input Voltage: AC 100–240 V, 50/60 Hz
Power: 550 W / 600 W
Light Source: OSRAM SIRIUS HRI 371W+ / OSRAM SIRIUS HRI 421W
Color Temperature: 7800 K
Beam Angle: 1.5°
Optical diameter: 190mm extra-large aperture
Color wheel: 1 color wheel, 14 colors + white light, with half-tone,
Effect wheel: 1 6-color filter effect wheel
Dimming: 0-100% linear dimming
Strobing: Independent strobing (1-25Hz)
Focus: 0-100% linear focus
Fog system: 1 fog lens
Movement Range: X-axis 540°, Y-axis 270°
Mounting: Can be mounted horizontally or vertically
Housing Material: Full die-cast aluminum alloy housing
Protection Rating: IP66
Operating Temperature: -25°C to 45°C
Dimensions (1 unit inside, 2 units outside):
80 x 42 x 89 mm (height including wheels)
Dimensions (1 unit inside, 1 unit outside):
45 x 42 x 89 mm (height including wheels)





SF-MW380

380W防水光束灯（带光圈）
380W Waterproof Beam Moving Light (With Light Strip)



技术参数

电源:AC100V-240V 50Hz-60Hz
总功率:500W光源:380W保险丝:7A
镇流器:电子镇流器色温:7800K
电机数量:共14个静音电机，XY三相电机
调光:0-100%线性调节
固定颜色:14个色片+白光(可半色效果)
静态图案:7个固定图+5个大小不一的白光+白光
棱镜:8+8+8蜂窝棱镜、16棱镜
(双棱镜可叠加40，可双向独立旋转)
色片:1个六色片(可做七彩效果)
雾化:1个独立的雾化效果，光斑柔和自然控制
通道:18CH通道控制信号:国际标准DMX512
灯体尺寸:340x270x640mm
净重:21.1kg毛重:23kg

Technical Parameters

Power supply: AC100V–240V 50Hz–60Hz
Total power: 500W
Light source: 380W
Fuse: 7A
Ballast: electronic ballast
Color temperature: 7800K
Number of motors: a total of 14 silent motors, XY three–phase motors
Dimming: 0–100% linear adjustment
Fixed color: 14 color chips + white light (half–color effect possible)
Static patterns: 7 fixed images + 5 white light of different sizes + white light
Prism: 8+8+8 honeycomb prism, 16 prism (double prism can be superimposed by 40, and can be rotated independently in both directions)
Color film: 1 six–color film (can do colorful effect)
Atomization: 1 independent atomization effect, soft and natural light spot
Control channel: 18CH channel
Control signal: International standard DMX512
Lamp body size: 340 x 270 x 640mm
Net weight: 21.1kg , Gross weight: 23kg





SF-MW380A

380防水光束灯
380 Waterproof
Beam Light



技术参数

电压:AC100~240V50/60Hz
水平:540° 垂直:270°
总功率:500W
色温:8000K
防水等级:IP65
颜色盘:13种颜色+白光,可双向变速彩虹效果
双棱镜:8棱镜和8+16楼镜光
输出角度:1.9°-3°
悬挂:可悬挂调光:0-100%
面板:感应式按键
透镜:进口光学透镜
光源:欧司朗371WDMX512信号控制旋转
图案盘:13个固定图案片+白光
频闪:1-13次/秒
调焦:电子调焦
净重:28KG
尺寸:390*320*720mm

Technical Parameters

Voltage :AC100-240V50/60Hz
Level :540°
Total power :500W
Color temperature :8000K
Vertical :270°
Waterproof rating :IP65
Color palette :13 colors + white light,
with bidirectional variable speed rainbow effect
Double prisms: 8-prism and 8+ 16-floor mirror
Light output Angle :1.9°-3°
Hanging: It can be hung
Dimming :0-100%
Panel: Inductive keys
Net weight :28KG
Lens: Imported optical lens
Light source: Osram 371W
DMX512 signal control
Rotating pattern disc :13 fixed pattern pieces + white light
Stroboscopic :1-13 times per second
Focusing: Electronic focusing
Dimensions :390*320*720mm





SF-MW380(WBS)

380W防水三合一光束灯
380W Waterproof 3-in-1
Beam Light



技术参数

光源理论寿命 1500小时以上
调焦:线性电动调焦
调光:调光平滑无闪烁
光源:欧司朗371W
频闪:独立频闪、0.5-20次/秒可调
色盘:11个色片
光束角度:2°到60度
固定图案盘 12+1+可双向抖动、 动画、流水效果
可更换图案盘: 9+1
棱镜:8棱镜(可定制)
控制方式:DMX 512, 自走, 主从机
旋转角度: X轴540度、Y轴275度
可自动校正定位
通道:标准20通道, 精简通道16通道
防护等级: IP55
灯体尺寸: 418*378*620(mm) 27kg
纸箱尺寸: 49*41*77

Technical Parameters

The theoretical lifespan of the light source is over 1,500 hours
Focusing: Linear electric focusing
Dimming: Smooth dimming without flicker
Light source: Osram 371W
Flicker: Independent flicker,
adjustable from 0.5 to 20 times per second
Color palette: 11 color pieces
Beam Angle: 2° to 60 degrees
The fixed pattern disc 12+1+ can perform bidirectional
shaking, animation and flowing water effects
Replaceable pattern discs: 9+1
Prism :8 prisms (customizable)
Control mode :DMX 512, auto-drive, master-slave
Rotation Angle: 540 degrees on the X-axis and 275 degrees
on the Y-axis can be automatically corrected and positioned
Channels: Standard 20 channels, simplified 16 channels
Protection grade: IP55
Lamp body dimensions: 418*378*620(mm), 27kg
Carton size: 49*41*77





SF-M50L

50W防水激光光束灯
50W Waterproof Laser Beam Light



技术参数

光源:50W 光源预期寿命:12000H
CRI:≥70XY自动纠错
1色轮:13个双向颜色滤镜+开放
1六色滤镜
1静态图案轮:19 个图案+开放
电动调焦光束角度:1°
4 旋转棱镜:8 个刻面+3 个线性+18 个刻面+42 个刻面棱镜,可重叠,转位,双向旋转 雾化
滤镜调光:0-100%线性调光
频闪:电子，1-25Hz或脉冲可调
保护等级IP65
显示屏：1.8寸LCD 15 秒待机自动锁屏
通道:16CH
AC100-240V50/60Hz
功率:85W
产品尺寸:344*227*545mm

Technical Parameters

Light source :50W
Expected lifespan of the light source: 12,000 hours
CRI: ≥ 70XY automatic error correction
1 Color Wheel :13 bidirectional color filters + open
Six-color filter
Static pattern wheel :19 patterns + open
Electric focusing beam Angle :1°
4 Rotating prisms :8 facets +3 linear prisms +18 facets +42 facets prisms, which can be overlapped, repositioned, and bidirectionally rotated for atomization
Filter dimming :0-100% linear dimming
Stroboscopic: Electronic, 1-25Hz or pulse adjustable
Protection level: IP65
Display screen: 1.8-inch LCD with 15-second standby and automatic screen lock
Passage :16CH
AC100-240V50/60Hz
Power :85W
Product size :344*227*545mm





SF-M480

480W光束灯
480W Beam Light



技术参数

输入电压:AC100-240V,50/60HZ
总功率:650W色温:7000K透镜口径:180mm
水平扫描:540°垂直扫描:2709
光源:牛尾光源防水等级:IP20
控制方式:DMX512、RDM
颜色盘:13种颜色+白光 可双向变速彩虹效果
图案盘:17个固定图案片+白光
雾化:1个雾化镜
双棱镜:8-16棱镜双向变速旋转
调光:0-100%线性调节
频闪:1-13次/秒调焦:电子调焦
光通量:29000LM光输出角度:1.9°
面板:LED触摸液晶显示屏 可180度旋转
净重:21.5KG
尺寸:40*28.5*64(cm)

Technical Parameters

Input voltage :AC100-240V,50/60HZ
Total power :650W
Color temperature :7000K
Lens diameter :180mm
Horizontal scan :540° Vertical scan :2709
Waterproof rating :IP20
Control mode :DMX512, RDM
Color palette :13 colors + white light with bidirectional variable speed rainbow effect
Pattern plate :17 fixed pattern pieces + white light
Atomization :1 atomization mirror
Double prism :8-16 prism bidirectional variable speed rotation
Dimming :0-100% linear adjustment
Stroboscopic :1-13 times per second
Focusing: Electronic focusing
Luminous flux: 29,000 lm
Light output Angle :1.9°
Panel: The LED touch LCD screen can be rotated 180 degrees
Net weight :21.5KG Size :40*28.5*64(cm)





SF-M420B

420W光束灯
420W Beam Light



技术参数

光源类型： 420W铂金杯泡
冷却系统: 内置对流传热/风冷
调焦: 独立电子线性调焦
调光:0-100% 频闪:0-12次/秒
多棱镜效果，效果镜效果
控制模式: DMX512/主从/自动/同步
DMX512 通道:16CH
水平5400, 垂直2700,水平/垂直速度可调
描微调:8/16bit
水平/垂直反向
1个铜制精细旋转图案盘
(共17个金属图案片+白光)+
1个色盘(14种色+白光)
图案流水效果,图案双向旋转
光圈远距离梦幻效果
凌镜8+8+8蜂窝和8凌镜
色盘14种颜色+白光,线性彩虹效果
产品尺寸 :362*350*513
重量:18kg



Technical Parameters

Light source type: 420W platinum cup bulb
Cooling system: Built-in convective heat transfer/air cooling
Focusing: Independent electronic linear focusing
Dimming :0-100%;
Stroboscopic :0-12 times per second
Control mode: DMX512/ Master-slave/ Automatic/Synchronous
DMX512 channel :16CH
Horizontal: 5400, vertical: 2700, adjustable horizontal/vertical speed
Fine-tuning :8/16bit
Horizontal/vertical reverse
(17 metal pattern pieces + white light)+ 1 color disk (14 colors + white light)
Lingjing 8+8+8 honeycomb and 8 Lingjing 14 colors on the color palette + white light, linear rainbow effect
Product size :362*350*513mm Weight :18kg



SF-M380

380W光束灯
380W Beam Light



技术参数

电源:AC100V-24050Hz-60Hz
总功率:500W
光源:380W
保险丝:7A
镇流器:电子镇流器
色温:7800K
调光：0-100%线性调节
固定颜色:14个色片+白光(可半色效果)
静态图案:7个固定图+5个大小不一的白光+白光
棱镜:8+8+8蜂窝棱镜、
16棱镜(双棱镜可叠加40,可双向独立旋转
色片:1个六色片(可做七彩效果)
雾化:1个独立的雾化效果,光斑柔和自然
控制通道:18CH通道
控制信号:国际标准DMX512
灯体尺寸:340 x 270 x 640mm
净重:21.1kg 毛重:23kg



Technical Parameters

Power supply :AC100V-24050Hz-60HZ
Total power :500W Light source :380W
Fuse :7A Ballast: Electronic ballast
Color temperature :7800K
Dimming :0-100% linear adjustment
Fixed color :14 color sheets + white light (half-color effect available)
Static pattern :7 fixed images +5 white lights of different sizes + white light
Prism :8+8+8 honeycomb prism, 16 prism (double prisms can be stacked), can rotate independently in both directions
Color sheet :1 six-color sheet (can achieve a seven-color effect)
Atomization :1 independent atomization effect, with soft and natural light spot control
Channel :18CH channel
Control signal: International standard DMX512
Lamp body size :340x270x640mm
Net weight :21.1kg Gross weight :23kg



SF-M380MN

Mini380W光束灯 +灯带

Mini 380W Beam Light With Light Strip



技术参数

电源：AC 100V-240V，50Hz-60Hz
总功率：500W
光源：380W
镇流器：电子镇流器
色温：7800K
调光：0-100% 线性调节
固定颜色：14种色片 + 白光
静态图案：7种固定图案 + 5种不同尺寸的白光 + 白光
棱镜：8+8+8蜂窝棱镜，共16个棱镜
色轮：1个6色色轮
雾化效果：1个独立雾化效果，可产生柔和自然的光束
控制通道：18通道
控制信号：国际标准DMX512
包装尺寸：32*24*56.5cm
净重：12kg .

Technical Parameters

Power Supply: AC 100V-240V, 50Hz-60Hz
Total Power: 500W
Light Source: 380w
Ballast: Electronic BallastColor
Temperature: 7800K
Dimming: 0-100% linear adjustment
Fixed Colors: 14 color filters + white light
Static Patterns: 7 fixed patterns + 5 varying sizes of white light + white light
Prisms: 8+8+8 honeycomb prism, 16 prism
Color Filter: 1 x 6-color wheel
Fog Effect: 1 x independent fog effect for soft, natural beam
Control Channels: 18CH channels
Control Signal: International standard DMX512
Packing size: 32*24*56.5cm
N.W:12kg





SF-M380(WBS)

380/350W光束图案灯

380W/350W Beam Gobo Moving Head Light



技术参数

额定电压:AC110V-220V-60HZ
功率:380W
定焦放大出光口径:152mm
光束角度:1.8度
图案角度:25度
棱镜:双棱镜
三个图案:一个旋转图盘，一个固定图盘，一个效果盘
固定图案:14个图案+1(白光)
颜色:14个颜色+1(白光)
旋转图案:4个旋转图案+1(白光)
固定效果图案:6个效果图案(可做效果盘)
外形尺寸:33.7x24.1x51.8 cm
产品净重:13.6kg

Technical Parameters

Rated Voltage: AC 110V–220V, 60Hz
Power: 380W
Fixed-focus output aperture: 152mm
Beam angle: 1.8 degrees
Pattern angle: 25 degrees
Prism: Dual prism
Three pattern discs: one rotating pattern disc, one fixed pattern disc, and one effect disc
Fixed patterns: 14 patterns + 1 (white light)
Colors: 14 colors + 1 (white light)
Rotating Patterns:
4 rotating patterns + 1 (white light)
Fixed Effect Patterns: 6 effect patterns (can be used as an effect wheel)
Dimensions: 33.7 x 24.1 x 51.8 cm
Net Weight: 13.6 kg





SF-M350

350W三合一光束灯
350W 3-in-1 Beam Light



技术参数

电压:AC100-240V，50/60HZ
总功率:450W光源: 350W
镇流器:电子镇流器
通道:16/24CH颜色:1个颜色盘，
14个颜色+白光，可半色、可双向流动
图案:1个固定图案盘，17种图案+白光，
图案盘可抖动，可双向流动
棱镜:一个8+16棱镜，一个24棱镜
频闪:机械调光，频闪0.5-14次/秒，
脉冲和随机频闪功能:
光圈:电动光圈,渐变柔光效果
角度:3.8°-45°
光学:线性变焦0-25°水平540°，
垂直245°8/16Bit解析度
灯体尺寸:440x320x630mm
净重:18.6kg
毛重:20kg .

Technical Parameters

Voltage :AC100-240V, 50/60HZ.
Total power :450W Light source: 350W
Ballast: Electronic ballast Channel :16/24CH
Color :1 color disk, 14 colors + white light,
half-color and bidirectional flow available
Pattern :1 fixed pattern disk,
17 patterns + white light.
The pattern disk can shake and flow in both directions
Prisms: One 8+16 prism, one 24 prism
Stroboscopic effect: Mechanical dimming,
stroboscopic effect 0.5-14 times per second,
pulse and random stroboscopic function
Aperture: Electric aperture, gradient
soft light effect
Angle :3.8°-45°
Optics: Linear zoom 0-25°
Horizontal: 540°, vertical: 245°, 8/16-bit resolution
Lamp body dimensions :440x320x630mm
Net weight :18.6kg Gross weight :20kg





SF-M361

361光束灯
361 Beam Light



技术参数

电源:AC100-240V，50160HZ
总功率:450W光源:欧司朗灯泡350W，
色温6800K控制方式:DMX512/声控主从自走
通道:16通道雾化:带雾化
调焦:高效6层全膜调焦镜
防护等级:IP20灯泡寿命:官方8000小时
频闪:双片式频闪片六彩:6片颜色
棱镜一:八棱镜带双向旋转功能
棱镜二:8+16+24蜂窝棱镜带双向旋转功能
外观:耐高温防火合金塑料色片:13+白光，
带半色功能，流水效果
图案:17+白光，带抖动功能，流水效果
显示屏:蓝屏+按键中英文切换，
自动翻转功能
扫描:水平540°，垂直270°
灯体尺寸:350x260x550mm
净重:16kg
毛重:18kg

Technical Parameters

Power supply :AC100-240V, 50/60HZ Total power :450W
Light source: Osram bulb 350W
Color temperature: 6800K
Control mode :DMX512/ Voice control/
master-slave/self-drive
Channel :16 channels Atomization: With atomization
Focusing: High-efficiency 6-layer full-film focusing lens
Protection grade :Ip20 Bulb lifespan: Official 8,000 hours
Prism One: Octagonal prism with bidirectional rotation function
Prism Two :8+16+24 honeycomb prism
with bidirectional rotation function.
Appearance: High-temperature resistant
and fireproof alloy plastic
Color film :13+ white light, with half-color function,
flowing effect Pattern :17+ white light, with jitter function,
flowing water effect
Display screen: Blue screen + button switch between
Chinese and English, automatic flip
Function scan: 540° horizontal, 270° vertical
Lamp body size :350x260x550mm
Gross weight :18kg Net weight :16kg





SF-M295

295W光束灯
295W Beam Light



技术参数

电源:AC100-240V，50160HZ
总功率:450W光源:欧司朗灯泡295W，
色温6800K控制方式:DMX512/声控/主从/自走
通道:16通道雾化:带雾化
调焦:高效6层全膜调焦镜
防护等级:IP20灯泡寿命:官方8000小时
频闪:双片式频闪片六彩:6片颜色
棱镜一:八棱镜带双向旋转功能
棱镜二:8+16+24蜂窝棱镜带双向旋转功能
外观:耐高温防火合金塑料
色片:13+白光，带半色功能，流水效果
图案:17+白光，带抖动功能，流水效果
显示屏:蓝屏+按键中英文切换，自动翻转功能
扫描:水平540°，垂直270°
灯体尺寸:320x220x560mm
净重:14K9
毛重:16kg

Technical Parameters

Power supply :AC100-240V, 50/60HZ Total power :450W
Light source: Osram bulb 295W
Color temperature 6800K
Control mode :DMX512/ Voice control/ master-slave/self-drive
Channel :16 channels. Atomization: With atomization
Focusing: High-efficiency 6-layer full-film focusing lens
Protection grade :Ip20 Bulb lifespan: Official 8,000 hours
Stroboscopic: Dual-chip stroboscopic film
Six colors: Six pieces of color
Prism One: Octagonal prism with bidirectional rotation function
Prism Two :8+16+24 honeycomb prisms with bidirectional rotation function
Appearance: High-temperature resistant and fireproof alloy plastic
Color film :13+ white light, with half-color function
Pattern :17+ white light, with jitter function
Chinese and English, automatic flip function
Scanning: 540° horizontally, 270° vertically
Lamp body dimensions :320x220x560mm
Net weight :14kg Gross weight :16kg





SF-M280

280W光束灯+灯带
280WBeam Light+Light Strip



技术参数

电源:AC100-240V，50/60Hz
产品功率:320W光源:250W
颜色盘:14 个固定颜色+白光
图案盘:13 个固定图案+白光
图案:1颗30W进口科锐灯珠+8个图案盘
颜色:14 个颜色+白光，半色，彩虹效果
控制方式:DMX512/声控/主从/自走
旋转:水平540°，垂直270°
适用场所:中小型演唱会,l演播室,流动演出
移动DJ,婚庆,KI,歌剧院,演艺厅等
灯体尺寸:340x255x540mm
净重:14kg毛重:16kg

Technical Parameters

Power supply :AC100-240V, 50/60Hz
Product power :320W \ nLight source :250W
Color palette :14 fixed colors + white light
Pattern plate :13 fixed patterns + white light
Pattern :1 30W imported Cree light bead +8 pattern discs
Color :14 colors + white light, half-color, rainbow effect
Control mode :DMX512/ Voice control/ master-slave/self-drive
Rotation: 540° horizontally, 270° vertically
Applicable venues: small and medium-sized concerts,l
studios, mobile performances, mobile DJS, weddings,KI,
opera houses, performance halls, etc
Lamp body dimensions :340x255x540mm
Net weight :14kgGross weight :16kg





SF-M295MN

迷你295W光束灯+灯带
Mini 295W Beam Light
With Light Strip





技术参数

输入电压：AC100-240V，50/60Hz
功率：295W
灯泡寿命：8000小时
颜色：12种颜色加白光，半色效果
固定图案：13种带白光的精细固定图案
棱镜：两个棱镜
控制模式：国际标准DMX 512/随机模式/自走模式
X轴：540度
Y轴：270度
工作温度：-10℃至45℃
防护等级：IP20
净重：9.9kg
毛重：12kg
产品尺寸：26*21*45（cm）
包装尺寸：54.5*30*39.5（cm）

Technical Parameters

Input Voltage: AC 100–240 V, 50/60 Hz
Power: 295 W
Bulb Life: 8,000 hours
Colors: 12 colors plus white light, half-color effect
Fixed Patterns: 13 detailed fixed patterns with white light
Prisms: Two prisms
Control Modes: International Standard DMX 512 / Random Mode / Auto Mode
X-axis: 540 degrees
Y-axis: 270 degrees
Operating temperature: -10°C to 45°C
Protection rating: IP20
Net weight: 9.9 kg
Gross weight: 12 kg
Product dimensions: 26 x 21 x 45 cm
Packaging dimensions: 54.5 x 30 x 39.5 cm

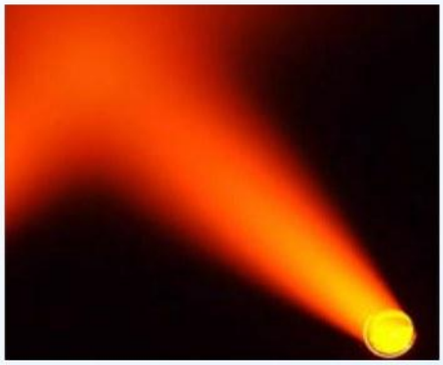

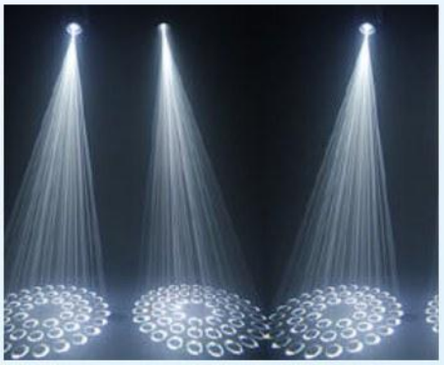

SF-M230

230W光束灯
230W Beam Light



技术参数

电压:AC100-240V 50/60Hz
总功率:300W光源:230W 通道:16通道
光束角度:平行光束角度0°~4°可调线性
调光:机械线性调光0~100%
频闪速度每秒1-20次
棱 镜:1个独立的八面棱镜，双向变速旋转
调焦:采用高精密玻璃光学镜头,
电子线性高清调节
雾化:1个独立的雾化效果,光斑柔和自然
扫描:水平540°,垂直270°,
16BIT精度扫描,自动回位
灯体尺寸:400x330x485mm
净重:16.8kg毛重:19.5kg

Technical Parameters

Voltage :AC100-240V 50/60Hz
Total power :300W Light source :230W
Channel :16 channels
Beam Angle: The parallel beam
Angle is adjustable and linear from 0° to 4°
Dimming: Mechanical linear dimming 0-100%
The stroboscopic speed is
1 to 20 times per second
Prism :1 independent octagonal prism,
bidirectional variable speed rotation
Focusing: It adopts high-precision glass
optical lenses and electronic linear
high-definition adjustment
Atomization :1 independent atomization effect,
with soft and natural light spots
Scanning: Horizontal 540°, vertical 270°,
16-bit precision scanning,
automatic return to position
Lamp body size :400x330x485mm
Net weight :16.8kg \ nGross weight :19.5kg





China2EU

LED图案光束灯系列

LED Pattern Beam Light Series




SF-LBM001

LED800W防水切割灯
LED 800W Waterproof Profile Moving Head Light



技术参数

额定电压：AC100-240V 50/60Hz
额定功率：：LED800W/1400W模组
显色指数：73-90 CRI可调
色温：8000K
平均寿命20000小时
颜色盘：均匀顺滑的CMY：0-100% 线性调节
旋转图案盘：6个插拔式的旋转图案片+白圆
固定图案盘：6种固定图案+流水图案+白光
调光：0-100%线性调节
光束角度：5.5-50度
灯体旋转角度：水平540度；垂直270；
操作模式:DMX512模式，支持RDM协议，主从，自走等
DMX 通道数:38通道
防护等级：IP66 灯体总重: 55KG

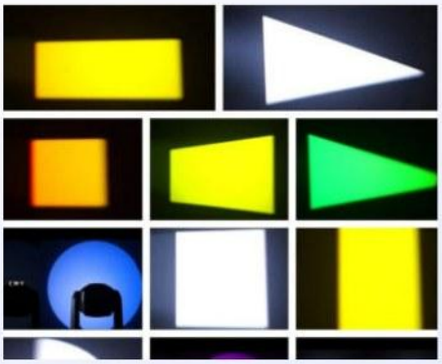

Technical Parameters

Rated Voltage: AC 100–240 V, 50/60 Hz
Rated Power: 800 W/1400 W LED modules
Color Rendering Index: 73–90 (CRI adjustable)
Color Temperature: 8000 K
Average lifespan: 20,000 hours
Color wheel: Smooth, uniform CMY: 0–100% linear adjustment
Rotating pattern wheel: 6 interchangeable rotating pattern discs + white circle
Fixed pattern wheel: 6 fixed patterns + running light pattern + white light
Dimming: 0–100% linear adjustment
Beam Angle: 5.5–50 degrees
Luminaire Rotation: Horizontal 540 degrees; Vertical 270 degrees
Operating Modes: DMX512 mode, supports RDM protocol, master/slave, auto-run, etc.
DMX Channels: 38 channels
Protection Rating: IP66 Total Weight: 55 kg




SF-LBM002

LED600W防水光束图案灯
LED 600W Waterproof Beam Gobo Moving Head Light



技术参数

输入电压:AC110V-240V/50-60HZ
光源规格:500W白光 LED 模组
色温:8000k 显色指数：75
光源寿命:50000小时
额定功率:600W
调光系统:0-100%线性调节
颜色:12种颜色 + 白光 色彩半色功能
固定图素:12个固定图案 + 白光
旋转图案:7个玻璃图案，
每个玻璃图案可独立正反转
防水等级:IP65
净 重:27Kg 外形尺寸:424*367*725mm
毛重:33.28KG 包装尺寸: 601*530*735mm
双装航空箱尺寸:92*47*90cm
重量:93kg

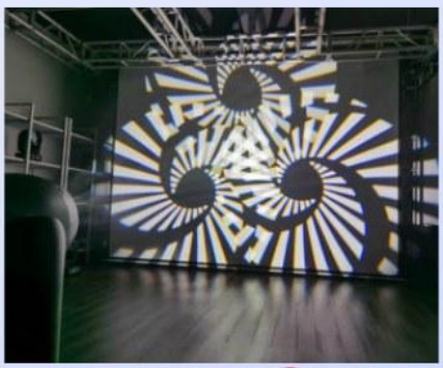

Technical Parameters

Input Voltage: AC 110V–240V / 50–60 Hz
Light Source Specifications: 500W white LED module
Color Temperature: 8000K; Color Rendering Index: 75
Light Source Lifespan: 50,000 hours
Rated Power: 600W
Dimming System: 0-100% linear adjustment
Colors: 12 colors + white light; half-color function
Fixed Patterns: 12 fixed patterns + white light
Rotating Patterns: 7 glass patterns; each glass pattern can rotate forward and backward independentlyWaterproof Rating: IP65
Net Weight: 27 kg Dimensions: 424 x 367 x 725 mm
Gross Weight: 33.28 kg
Packaging Dimensions: 601 x 530 x 735 mm
Double-walled Flight Case Dimensions: 92 x 47 x 90 cm
Weight: 93 kg



SF-LB001

LED1000/1200W切割灯
LED 1000W/1200W Profile Moving Head Light




技术参数

输入电压：AC100-240V,50/60Hz
额度功率：1150W
光源：1000W LED模组
LED寿命：20,000小时
色温：6500K 口径：150mm
控制方式：DMX512、RDM、自走、主从、声控
通道模式：36个国际标准DMX512通道
固定颜色：6种颜色+白光 混色系统：独立的CMY混色系统
色温调节：独立的CTO 2800K-6500K线性调节
棱镜盘：旋转3棱镜+6排镜
效果盘：超炫模拟动感窜动的火焰，潺潺流水等动态效果
切割系统：4个独立切割片，每片可单独闭光，可旋转90°
雾化系统：0~100%线性雾化 光圈系统：6%~100%顺滑调整
调光系统：0-100%线性调节
水平扫描：540°(16 bit精度扫描)
垂直扫描：270°(16 bit精度扫描)
防护等级：IP20 工作环境：0-45℃
产品尺寸：510L*345W*800H(mm)
纸箱尺寸：730*690*590（mm)
产品净重：43KG 产品毛重：51.5KG

Technical Parameters

Input voltage: AC100-240V,50/60HzQuota power: 1150W
Light source: 1000W LED moduleLED life: 20,000 hours
Color temperature: 6500K Caliber: 150mm
Control mode: DMX512, RDM, self-walking,
master-slave, voice contro
IChannel mode: 36 international standard DMX512 channels
Fixed color: 6 colors + White light
mixing system: Independent CMY mixing system
Color temperature adjustment: Independent CTO
2800K-6500K linear adjustment
Prism disk: Rotate 3 prisms +6 rows of mirrors
Effect tray: Super dazzling simulation of dynamic flames,
gurgling water and other dynamic effects
Cutting system: 4 independent cutting pieces, each piece can
be individually closed light, can be rotated 90°
Atomization system: 0~100% linear
atomization aperture system: 6%~100% smooth adjustment
Dimming system: 0-100% linear adjustment
Horizontal scan: 540° (16 bit precision scan)
Vertical scan: 270° (16 bit precision scan)
Protection level: IP20 Working environment: 0-45℃
Product size: 510L*345W*800H(mm)
Carton size: 730*690*590 (mm)
Net weight: 43KG Gross weight: 51.5KG



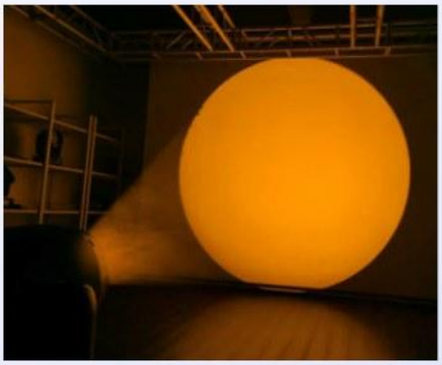

SF-LB002

LED600/700W模组四合一切割灯
600W/700W LED Modular 4-in-1 Profile Moving Head with Framing System



技术参数

光源规格:700W LED,8000KLED
寿命:20000小时
图案切割:4组8向切割片，可以切割任意图形，
带90°旋转图案:一个固定图案盘，带12个图案+
白圆一个旋转图案盘，7个图案片+白圆，
带图案抖动功能，任意定位功能。
一个效果盘，带火焰，流水动态
效果颜色:6个颜色+白光
CTO:独立切入式CTO
CMY:独立切入式CMY，线性CMY颜色切换，无极混色
棱镜:3棱镜，可双向旋转，带定位功能。
调焦:电子调焦(自动对焦)
线性调光频闪:0-20Hz，多种频闪效果雾化
制模式:DMX512.RDM,自走，主从，声控，内置
灯体旋转角度:水平540度;垂直270度;
自动回位纠正功能
通道:36CH 净重:36kg毛重: 38.5kg
纸箱尺寸: 73*69*59cm

Technical Parameters

Light source size :700W LED,8000KLED
Life: 20,000 hours
Pattern cutting :4 groups of 8-way cutting pieces,
you can cut any pattern,
With 90° rotation pattern: a fixed pattern plate with12patterns +
White circle A rotating pattern plate,
7 pattern pieces + white circle,
With pattern shaking function, arbitrary positioning function.
An effect tray with fire, flow dynamics
Effect color :6 colors + white light
CTO: independent entry CTO
CMY: Independent entry CMY, linear CMY color switching,
endless color mixing
Prism :3 prism, bidirectional rotation, with positioning function.
Focus: Electronic focus (autofocus)
Linear dimming stroboscopic :0-20Hz, a variety of
stroboscopic effects atomization
Production mode :DMX512.RDM, self-walking, master-slave,
voice control, built-in
Lamp body rotation Angle: horizontal
540 degrees; Vertical 270 degrees;
Automatic return correction function
Channel :36CH Net weight :36kg Gross weight: 38.5kg
Carton size: 73*69*59cm





SF-LB003

LED480W切割灯

LED 480W Profile Moving Head Light




技术参数

电压：AC100~240V50/60Hz
输入功率：650W
光源：高效率480WLED模组光源，内置温度传感器
平均寿命：大于20000小时
光源颜色：7400K
色彩系统：2个颜色轮，1个带有8个颜色+白光，
1个带有3个颜色+白光+CTO色温线性调节
图案盘：1个图案盘带有可更换的7个玻璃图案的旋转图案盘，
有图案定位、双向旋转、图案流水和抖动效果
切割盘：4片式全切割系统
频闪：电子频闪
调光：0-100%线性调光，解析度16bit，
调光效果特别的平滑
光圈：5%~100%顺滑调整
光束角度：电子线性变焦2.5°-40° 控制模式：26CH通道
DMX协议信号：USITTDMX512
旋转角度：PAN=540/630°，TILT=270°，解析度16bit
散热系统：铜管散热器+风扇辅助散热，温度电子传感检测
产品尺寸：418*378*670 净重：23Kg

Technical Parameters

Voltage: AC100~240V50/60Hz
Input power: 650W
Light source: High efficiency 480WLED module light source, built-in temperature sensor
Average life: more than 20,000 hours
Light source color: 7400K
Color system: 2 color wheels, 1 with 8 colors + white light, 1 with 3 colors + white light + CTO color temperature linear adjustment
Pattern plate: 1 pattern plate with a replaceable rotating pattern plate with 7 glass patterns, There are pattern positioning, two-way rotation, pattern water and shaking effects
Cutting disc: 4-piece full cutting system
Stroboscopic: electronic stroboscopic
Dimming: 0-100% linear dimming, 16bit resolution, The dimming effect is particularly smooth
Aperture: 5%~100% smooth adjustment
Beam Angle: Electronic linear zoom 2.5°-40°
Control mode: 26CH channel
DMX protocol signal: USITTDMX512
Rotation Angle: PAN=540/630°, TILT=270°, resolution 16bit
Heat dissipation system: copper tube radiator + fan auxiliary heat dissipation, temperature electronic sensing detection
Product size: 418*378*670 Net weight: 23Kg



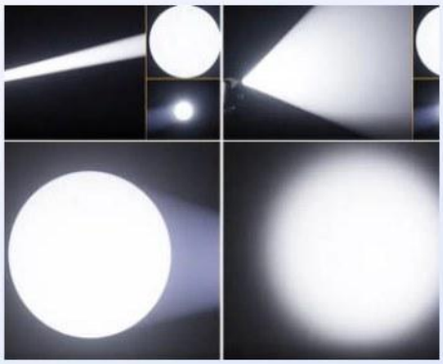

SF-LB004

LED400W三合一光束灯

LED 400W 3-in-1 Beam Spot Wash Moving Head Light





技术参数

输入电压: AC110V-240V/50-60HZ
光源规格: 400W LED 光源
光源寿命: 50000 小时
流明照度: 4米 120,000 lux
额定功率: 430W
水平扫描: 540 度(16 bit 精度扫描)
电子纠错垂直扫描: 270 度(16 bit 精度扫描)
电子纠错调光系统:0-100%线性调节
调焦系统:从 4米到 50 米线性调节
雾化系统:1独立雾化效果,光斑柔和自然
高速频闪:0-30次/秒。颜色:8色+自光,
固定图案:12固定图案+白光
旋转图案:7 个玻璃图案,每个玻璃图案
可独立正反转
棱镜系统:标准单六列棱镜和8棱镜
宏功能:控制台复位功能,自走模式,主从模式
冷却方式:采用轴流风机加强冷却
防护等级:IP20 产品净重:22.5 KG
产品尺寸:38*27*65CM(L*W*H)

Technical Parameters

Input voltage: AC110V-240V/50-60HZ
Light source specification: 400W LED light source
Light source life: 50000 hours
Lumen illuminance: 4 meters 120,000lux
Rated power: 430W
Horizontal scanning: 540 degrees (16 bit precision scanning)
ECC Vertical Scan: 270 degrees (16 bit precision scan)
ECC Dimming System: 0-100% linear adjustment
Focusing system: from 4 meters to 50 meters linear adjustment
Fogging system: 1 independent fogging effect, soft and natural light spot
High-speed strobe: 0-30 times / sec. Color: 8 colors + self-light
Fixed patterns: 12 fixed patterns + white light
Rotation pattern: 7 glass patterns, each glass pattern Can be independently forward and reverse
Prism system: standard single six-row prism and 8 prisms
Macro function: console reset function, self-propelled mode, master-slave mode
Cooling mode: axial fan to strengthen cooling
Protection level:IP20 Net weight:22.5 KG
Product Size:38*27*65CM(L*W*H)

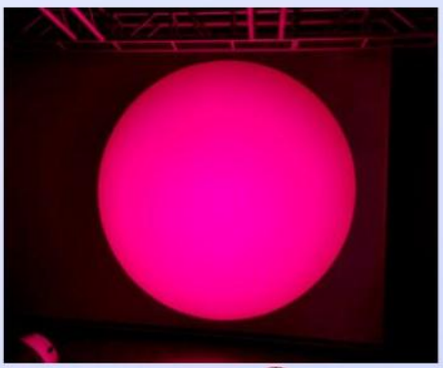

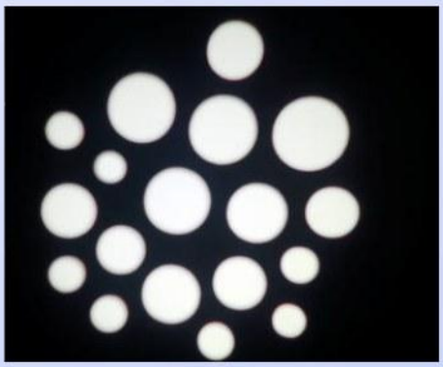

SF-LB005

LED300W 三合一光束灯

LED 300W 3-in-1 Beam Spot Wash Moving Head Light




技术参数

电源:AC100-240V，50/60Hz
产品功率:320W光源:250W
颜色盘:14 个固定颜色+白光
图案盘:13 个固定图案+白光
图案:1颗30W进口科锐灯珠+8个图案盘
颜色:14 个颜色+白光，半色，彩虹效果
控制方式:DMX512/声控/主从/自走
旋转:水平540°，垂直270°
适用场所:中小型演唱会,l演播室,流动演出
移动DJ,婚庆,KI,歌剧院,演艺厅等
灯体尺寸:340x255x540mm
净重:14kg
毛重:16kg

Technical Parameters

Fast LED oscillating pattern beam light
Channel values: 17 and 20 \ n
Horizontal/Vertical: 540°/270°,
16-bit precision scanning
Input voltage :AC100-240V, 50/60HZ
Color LCD display, making navigation more convenient
Operation mode :DMX512, the master/slave mode is displayed under the built-in lighting of the master/slave
Color palette :8 colors + white light.
Fixed pattern palette: 11 patterns + white light
Rotating pattern disk :7 patterns + white light
Shell: High-temperature resistant engineering plastic + aluminum alloy
Net weight :14.5KG
Gross weight :15.5KG
The packaging size is 39*28*68cm

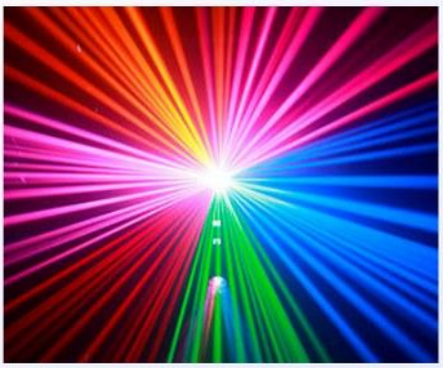



SF-LB006

LED300W光束灯

LED300W Beam Light



技术参数

电压:AC90-240V50Hz-60HZ
水平/垂直: 540°/270°，16bit精度扫描。
总功率:300W通道数值:19
输入电压:AC100-240V，50/60HZ
彩色液晶显示屏，导航更方便
操作模式:DMX512，主/从机
雾化:光斑柔与自然
频闪:电子线性频闪主/从模式,声控,自走模式
颜色盘13种颜色+白光
固定图案盘13种图案+白光
双向旋转16棱镜与48棱镜一个七彩效果盘
外壳:耐高温工程塑胶+铝合金
尺寸:49*40*59cm
净重:12.8KG
毛重:14.5KG

Technical Parameters

Voltage :AC90-240V, 50Hz-60HZ
Horizontal/vertical: 540°/270°,
16-bit precision scanning.
Total power :300W \ nChannel value :19
Input voltage :AC100-240V, 50/60HZ
Color LCD display, making navigation more convenient
Operating mode :DMX512, master/slave
Atomization: Soft and natural light spot
Stroboscopic: Electronic linear stroboscopic master/slave mode, voice control, self-propelled mode
The color palette features 13 colors and white light
Fixed pattern plate with 13 patterns + white light
A seven-color effect disk with a bidirectional rotating 16-prism and 48-prism
Shell: High-temperature resistant engineering plastic + aluminum alloy
Dimensions :49*40*59cm
Net weight :12.8KG Gross weight :14.5KG





SF-LB007

LED200W图案灯

LED 200W Gobo Moving Head Light



技术参数

输入电源:AC100-240V 50/ 60hz
功耗:240W
LED: 200W大功率LED
色轮:一个色轮，一个色轮中有7种色片
平移扫描540°(16位)电校正
倾斜扫描:210°(16位)电校正
静态Gobo: 8gobo
旋转Gobo:6个Gobo
效果轮:一个效果棱镜
控制方式:DMX512/主从/自动运行
净重:11公斤
毛量:13公斤
包装尺寸:47.5*35.5*38cm

Technical Parameters

Input power :AC100-240V 50/60hz
Power consumption :240W
LED: 200W high power LED
Color wheel: A color wheel,
a color wheel with 7 colors
Translation scan 540°
(16 bit) electrical correction
Tilt scan :210
°(16 bit) electrical correction
Static Gobo: 8gobo
Spin Gobo:6 Gobos
Effect Wheel: An effect prism
Control mode :DMX512/
master-slave/automatic operation
Net weight :11 kg
Gross weight :13 kg
Packing size :47.5*35.5*38cm





SF-LB008

LED150W光束灯

LED150W Beam Light



技术参数

电压:AC90-240V50Hz-60HZ
水平/垂直: 540°/270°，16bit精度扫描。
总功率:300W通道数值:19
输入电压:AC100-240V，50/60HZ
彩色液晶显示屏，导航更方便
操作模式:DMX512，主/从机
雾化:光斑柔与自然
频闪:电子线性频闪主/从模式,声控,自走模式
颜色盘13种颜色+白光
固定图案盘13种图案+白光
双向旋转16棱镜与48棱镜一个七彩效果盘
外壳:耐高温工程塑胶+铝合金
尺寸:49*40*59cm 净重:12.8KG 毛重:14.5KG

Technical Parameters

Voltage :AC90-240V, 50Hz-60HZ
Horizontal/vertical: 540°/270°,
16-bit precision scanning. Total power :300W
Channel value :19
Input voltage :AC100-240V, 50/60HZ
Color LCD display, making navigation
more convenient
Operating mode :DMX512, master/slave
Atomization: Soft and natural light spot
Stroboscopic: Electronic linear stroboscopic
master/slave mode, voice control, self-propelled mode
The color palette features 13 colors and white light
Fixed pattern plate with 13 patterns + white light
A seven-color effect disk with a bidirectional
rotating 16-prism and 48-prism
Shell: High-temperature resistant engineering
plastic + aluminum alloy
Dimensions :49*40*59cm
Net weight :12.8KG Gross weight :14.5KG





SF-LB009

LED150W图案灯
LED 150W Gobo Moving Head Light

技术参数

电压:AC90-260V.50/60Hz光源:150W
LED白光X轴:540°,Y轴:270 通道:16CH
控制模式:DMX512,主从,声控,自走1个旋转图案盘(6个图案+1个白光)图案
震动效果1个固定图案盘(8个图案+白光),
图案震动效果颜色盘:1个颜色盘
(7个颜色+白光)
变焦角度:4.5~22°
产品尺寸:328x220x482mm
净重:1235kg 毛重:14.95kg

Technical Parameters

Voltage :AC90-260V, 50/60Hz.
Light source :150W
LED white light X-axis :540°, Y-axis :270°
channels :16CH
Control mode :DMX512, master-slave, voice control, self-drive 1 rotation
Pattern disk :(6 patterns +1 white light)
Pattern vibration
Effect :1 fixed pattern disk
(8 patterns + white light), pattern vibration effect
Color disk :1 color disk (7 colors + white light)
Zoom Angle :4.5-22°
Product size :328x220x482mm
Net weight: 1,235 kg
Gross weight :14.95kg







SF-LB010

LED100W图案灯
LED 100W Gobo Moving Head Light

技术参数

电压:AC90-240V 50/60Hz
光源:单个100W LED
总功率:200W
运行模式:DMX512,主从,声控,自走控制
通道:12/20通道
扫描角度:水平540°, 垂直270°
色轮:8色+白色
尺寸:330*330*480cm
包装尺寸:500*365*335mm
重量:15kg

Technical Parameters

Voltage :AC90-240V 50/60Hz
Light source: Single 100W LED
Total power :200W
Operation mode :DMX512, master-slave, voice control, self-propelled control
Channel :12/20 channel
Scanning Angle: 540° horizontally, 270° vertically
Color wheel :8 colors + white
Dimensions :330*330*480cm
Packaging size :500*365*335mm
Weight :15kg







China2EU

LED摇头染色系列

LED Moving Head Wash Light Series



SF-LM001A


LED37颗40W大蜂眼

LED 37x40W Zoom Wash
Bee Eye Moving Head Light



技术参数

输入电源:AC100-240V 50/ 60hz
能源消耗:1560瓦(max)
光源:37 × 40W RGBW LED
平均寿命:50000h
控制模式: DMX512、RDM、主从模式、声控
通道模式： 21/22/35/36/111/148CH
移动:平移/倾斜:X轴540°，Y轴270°
变焦角度: 4-55°
颜色:RGBW混色系统，混色均匀无闪烁，
色彩:彩虹效果
色温可调:2500-10000K
调光:电子调光，四条调光曲线，两种调光模式
变焦系统:线性电动变焦
温度控制:智能温度控制，具有自动调节冷却风扇转速和过热保护功能，三种风扇模式
外壳材质:防火塑料
包装尺寸:67 * 59 * 42cm
净重: 24.7kg　毛重: 30.7kg

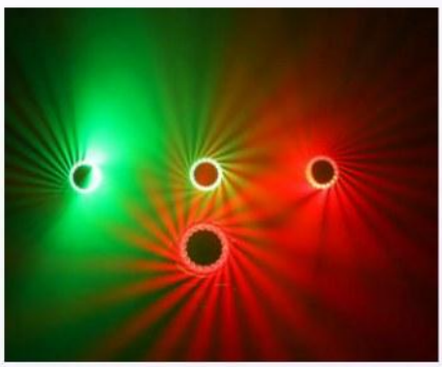

Technical Parameters

Input power supply :AC100-240V 50/60hz
Energy consumption :1560 watts (max)
Light source: 37 × 40W RGBW LED
Average lifespan: 50,000 hours
Control modes: DMX512, RDM,
master-slave mode,voice control
Channel mode: 21/22/35/36/111/148CH
Movement: Translation/Tilt: 540° on the X-axis,
270° on the Y-axis Zoom Angle: 4-55°
Color: RGBW color mixing system,
uniform color mixing without flicker
Colour: Rainbow effect
Adjustable color temperature: 2500-10000K
Dimming: Electronic dimming,
four dimming curves,two dimming modes
Zoom system: Linear electric zoom
Temperature control: Intelligent temperature control,
featuring automatic adjustment of cooling fan speed
and overheat protection function, with three fan modes
Shell material: Fireproof plastic
Packaging size :67 * 59 * 42 centimeters
Net weight: 24.7kg Gross weight: 30.7kg



SF-LM001


LED19颗40W大蜂眼

LED 19x40W Zoom Wash
Bee Eye Moving Head Light



技术参数

电源:AC100V-240V 50-60HZ
最大功率:1000W
光源:19颗40W 四合一OSRAMLED灯珠
灯带:5050RGB74PCS0.12W幻彩侧发光灯带
色温:2800K-8500K
灯珠寿命:50000小时
显示:彩屏 频闪:1-25次/秒
光斑角度:0-60°
调光:0-100%线性电子调光
控制方式:DMX512、声控、自走、主从通道
模式:24/26/38/81/95/100/102CH
功能效果:具有CTO，染色，光束，效果模式(漩涡，万花筒)
前置镜盘可变向无极旋转、无缝拼接镜盘
非球面镜片结构，灯珠单颗点控控制
灯带效果:频闪、跑马效果，带内置程序
包装尺寸:580x550x375mm
毛重:20kg

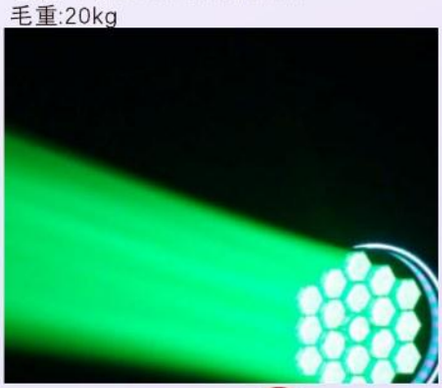

Technical Parameters

Power supply :AC100V-240V, 50-60HZ
Maximum power :1000W
Light source :19 40W four-in-one OSRAMLED beads
Light strip :5050RGB74PCS0.
12W color-changing side light strip
Color temperature :2800K-8500K
The lifespan of the lamp beads: 50,000 hours
Display: Color screen
Stroboscopic :1-25 times per second
Spot Angle :0-60°
Dimming :0-100% linear electronic dimming
Control mode :DMX512, voice control,
self-propelled, master-slave channel
Pattern: 24/26/38/81/95/100/102 ch
Functional effects: Equipped with CTO,
staining, beam, and effect modes
(vortex, kaleidoscope)
Light strip effects: stroboscopic,
horse-running effect, with built-in program
Packaging size :580x550x375mm
Gross weight :20kg



SF-LM047

LED19颗40W防水大蜂眼

LED 19x40W IP65
Waterproof Zoom Wash
Bee Eye Moving Head Light



技术参数

电压:AC100V-240V/50-60Hz
功率:820　光源:19 × 40W RGBW LED
平均寿命:50000h
通道模式:18CH/21CH/35CH/78CH/94CH/111CH
水平: 540°垂直: 220°
光学系统:高精度集成结构透镜，
高透光率石英玻璃棒+PMMA透镜
变焦角度:可调从4°到55°
颜色:RGBW混色系统，混色均匀无闪烁，
色彩彩虹效果快
色温可调:2500-10000K　闪光灯:1 k-25hz
温度控制:智能温度控制，具有自动调节冷却
风扇转速和过热保护功能，三种风扇模式
外壳材料:最新第二代结构防水设计，
金属压铸铝外壳和耐火工程塑料
防护等级:IP65
净重:23.5kg 毛重:27.5 kg
包装尺寸:65*49.5*37cm



Technical Parameters

Voltage :AC100V-240V/50-60Hz
Light source :19 × 40W RGBW LED
Average lifespan: 50,000 hours
Channel mode:
18 ch 35 ch / 78/21 ch/ch / 94 ch / 111 ch
Horizontal: 540° Vertical: 220°
Zoom Angle: Adjustable from 4° to 55°
Color :RGBW color mixing system,
uniform color mixing without flicker
Adjustable color temperature :2500-10000K
Flash :1 k-25hz
Temperature control: Intelligent temperature
control with automatic cooling adjustment
Shell material: Metal die-cast aluminum shell
and refractory engineering plastic
Protection grade :IP65
Net weight :23.5kg Gross weight :27.5 kg
Packaging size :65*49.5*37cm



SF-LM048


LED19颗40W大蜂眼+辅光

LED 19x40W Big Bee Eye
Moving Head Light with
Auxiliary LEDs




技术参数

电压: AC100V-240V 50-60赫兹
功率: 1000W
色温: 2800K-8500K
灯寿命: 50000小时
频闪: 每秒1-25次
光斑角度: 4°-60°
调光: 0-100% 线性电子调光
模式: DMX512，语音控制，自行式，
主从式
通道模式:24/26/38/81/95/100/102CH
尺寸:580x550x375mm
重量:20千克

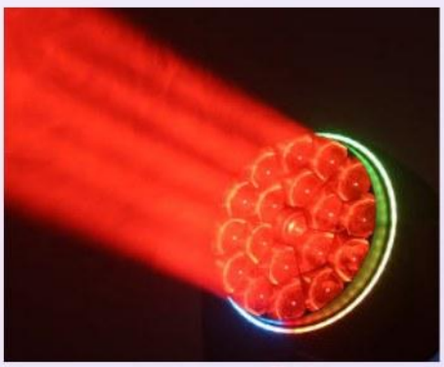

Technical Parameters

Voltage: AC100V-240V, 50-60 Hertz
Power: 1000W
Color temperature: 2800K-8500K
Lamp lifespan: 50,000 hours
Stroboscopic: 1 to 25 times per second
Spot Angle: 4-60
Dimming: 0-100% linear electronic dimming
Mode: DMX512, voice control, self-propelled,
master-slave
Channel mode: 24/26/38/81/95/100/102 ch
Dimensions :580x550x375 millimeters
Weight :20 kilograms

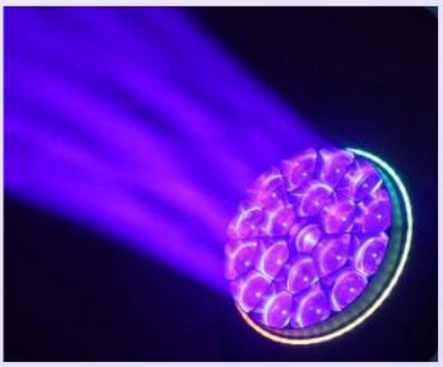

SF-LM006

LED12颗40W
摇头染色
LED12×40W Moving
Head Wash Light


技术参数

电压:AC100V-240V，50/60Hz
调光:0~100%线性调光
光源:12颗40W(4IN1-RGBW)
发光角度:100-600
控制模式:DMX512，主从,自走,声控模式
特点:集光束、染色、调焦效果与一体
适用范围:
酒吧、迪厅、宴会厅、酒店、舞台、婚庆等

Technical Parameters

Voltage:AC100V-240V,50/60Hz
Dimming: 0~100% linear dimming
Light source:12pcs 40W(4IN1-RGBW)
Lighting Angle:100~600
Control mode: DMX512, master-slave,
self-propelled, voice-activated
Mode features: set beam, coloring,
focusing effect and integration
Scope of application:
bars, discos, banquet halls
Hotel, stage, wedding, etc.



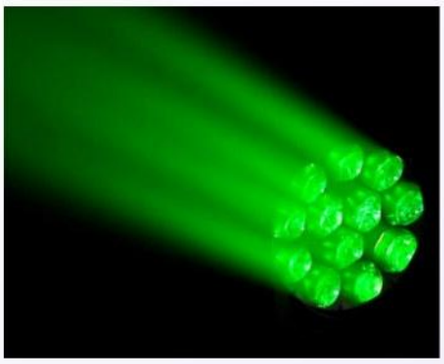



SF-LM049

LED37颗15W
摇头染色
LED37×15W Moving
Head Wash Light

技术参数


电压:AC100V-240V/50-60Hz功率:820
光源:19 × 40W RGBW LED
平均寿命:50000h
通道模式:18CH/21CH/35CH/
78CH/94CH/111CH
水平: 540°垂直: 220°
光学系统:高精度集成结构透镜,
高透光率石英玻璃棒+PMMA透镜
变焦角度:可调从4°到55°
颜色:RGBW混色系统，混色均匀无闪烁,
色彩彩虹效果快
色温可调:2500-10000K　闪光灯:1 k-25hz
温度控制:智能温度控制，具有自动调节冷却
风扇转速和过热保护功能，三种风扇模式
外壳材料:最新第二代结构防水设计,
金属压铸铝外壳和耐火工程塑料
防护等级:IP65
净重:23.5kg　毛重:27.5 kg
包装尺寸:65*49.5*37cm

Technical Parameters

Voltage :AC100V-240V/50-60Hz　Power :820
Light source :19 × 40W RGBW LED
Average lifespan: 50,000 hours
Horizontal: 540° Vertical: 220°
Optical system:
High-precision integrated structure lens
High transmittance quartz glass rod +PMMA lens
Zoom Angle: Adjustable from 4° to 55°
Color :RGBW color mixing system, uniform color
mixing without flicker Colour:
The rainbow effect is fast
Adjustable color temperature :2500-10000K
Flash :1 k-25hz
Temperature control: Fan speed and overheat
protection function, three fan modes
Shell material: Metal die-cast aluminum shell
and refractory engineering plastic
Protection grade :IP65
Net weight :23.5kg　Gross weight :27.5 kg
Packaging size :65*49.5*37cm





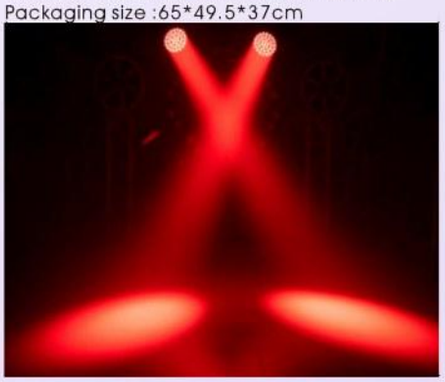

SF-LM002

LED19颗25W蜂眼
LED19×25W Bee Eye

技术参数

工作电压/频率: 100-240V 50/60HZ
总功率:500W光源:19个 25W 四合一LED
水平:540°， 垂直190°
DMX通道数:2135 7892 97通道
特征:单颗LED可点控
显示方式: 液晶显示屏前置镜盘
可双向地无极旋转
电子变焦范围:4-60°
0-100%线性电子调光
运行模式: DMX控台控制,自走,声控,
主/从机同步模式
频闪:频闪， 与可调速频闪， 支持频闪宏功能
防护等级:IP20
产品净重:16 KG
毛重:19 KG
包装尺寸56*49*44 cm

Technical Parameters

Working voltage/frequency: 100-240V 50/60HZ
Total power :500W
Light source :19 25W four-in-one leds
Horizontal :540°, vertical: 190°
Number of DMX channels :2135 7892 97 channels
Feature: A single LED can be point-controlled
Display mode: LCD screen, front mirror panel
It can rotate infinitely in both directions
Electronic zoom range :4-60°
0-100% linear electronic dimming
Operation mode: DMX console control,
self-propelled, voice control
Master/slave synchronization mode
Stroboscopic effect: Stroboscopic effect,
adjustable stroboscopic effect,
supports stroboscopic macro function
Protection grade :IP20
Net weight of the product :16 KG
Gross weight :19 KG
The packaging size is 56*49*44 cm







SF-LM003

LED19颗15W大蜂眼
LED19×15W Big Bee Eye

技术参数


电压:AC100-240V， 50/60 Hz
光源:19颗*15W RGBW
消耗功率:350W
控制信号:DMX512， 主从机，
声控或自走程序
光束角度:6°频闪:0-25次/秒
净重:8 Kg
毛重:9.5Kg
产品尺寸:300x250x370mm

Technical Parameters

Voltage :AC100-240V, 50/60 Hz
Light source :19 *15W RGBW
Power consumption :350W
Control signal :DMX512, master-slave,
voice control or automatic program
Beam Angle :6°,
stroboscopic :0-25 times per second
Net weight :8 Kg
Gross weight :9.5Kg
Product size :300x250x370mm





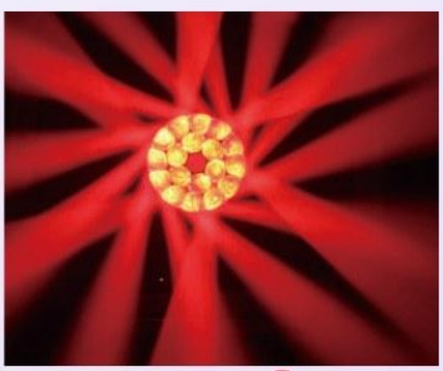



SF-LM050

LED7颗60W防水蜂眼

LED 7×60W Waterproof Bee Eye



技术参数

电压范围:AC100V-240V/50-60Hz
额定功率:480W
光源:7颗60W RGBW LED高亮度珠
平均寿命:50000h
控制方式:DMX512、RDM、主从模式、USB、ARTNET协议（根据要求）
通道模式:内置3通道
模式23CH/35CH/51CH（可扩展）
水平: 540°垂直: 220° 光学角度:可调4°至55°
清洗: 以中至大角度均匀散布光线
色温可调:2500-10000K
闪光灯:1 k-25hz 调光: 电子调光
变焦系统:线性电动变焦
温度控制:智能温度控制，具有自动调节冷却风扇转速和过热保护功能，三种风扇模式
外壳材料:最新第二代结构防水设计，金属压铸铝外壳和耐火工程塑料
防护等级:IP65
包装尺寸:58.5 * 43.5 * 35.5cm
净重:15.4kg总重量:20.4kg

Technical Parameters

Voltage range :AC100V-240V/50-60Hz
Rated power :480W
Light source :7 high-brightness 60W RGBW LED beads
Average lifespan: 50,000 hours
Control mode :DMX512, RDM, master-slave mode, USB, ARTNET protocol (as required)
Mode :23CH/35CH/51CH (Extensible)
Horizontal: 540° Vertical: 220°
Optical Angle: Adjustable from 4° to 55°
Adjustable color temperature :2500-10000K
Flash :1 k-25hz Dimming: Electronic dimming
Zoom system: Linear electric zoom
Temperature control: Fan speed and overheat protection function, three fan modes
Shell material: Metal die-cast aluminum shell and refractory engineering plastic
Protection grade :IP65
Packaging size :58.5 * 43.5 * 35.5cm
Net weight :15.4kg Total weight :20.4kg





SF-LM011

LED迷你7颗40W蜂眼

LED Mini 7×40W Bee Eye



技术参数

电压:AC100V-240V 50-60HZ
最大功率:350W
光源: 7颗40W 四合一 灯珠
温度:2800K-8500K
灯珠寿命:50000小时
显示:彩色
光斑角度:4.5-45
控制: DMX512、声控、自走
通道:17CH/21CH/21CH/29CH
水平扫描:540°
垂直扫描:270°
频闪:1-25个/秒，随机选择
尺寸: 17x18.5x34.5（mm）
重量: 6.2kg
功能效果:具有CTO，染色，光束，效果式(漩涡，万花筒)，前置镜盘可变向无极旋转，灯珠全亮控制

Technical Parameters

Voltage :AC100V-240V, 50-60HZ
Maximum power :350W
Light source: 7 40W four-in-one LED beads
Temperature :2800K-8500K
The lifespan of the lamp beads: 50,000 hours
Display: Color Spot Angle :4.5-45
Control: DMX512, voice control, self-propelled
Channel :17CH/21CH/21CH/29CH
Horizontal scan :540° Vertical scan :270°
Stroboscopic effect :1-25 per second, randomly selected
Dimensions: 17x18.5x34.5 (mm) Weight: 6.2kg
Functional effects: It features CTO, dyeing, beam, effect type (vortex, kaleidoscope), variable direction and stepless rotation of the front mirror disk, and full light control of the LED beads





SF-LM051

LED迷你7颗40摇头染色
LED Mini 7×40W Moving Head Wash Light



技术参数
电压:AC100V-240V 50-60HZ
最大功率:350W
光源: 7颗40W 四合一 灯珠
温度:2800K-8500K
灯珠寿命:50000小时
显示:彩色
光斑角度:4.5-45
控制: DMX512、声控、自走
通道:17CH/21CH/21CH/29CH
水平扫描:540°
垂直扫描:270°
频闪:1-25个/秒，随机选择
尺寸：17x18.5x34.5（mm）
重量：6.2kg
功能效果:具有CTO，染色，光束，效果式(漩涡，万花筒)，前置镜盘可变向无极旋转，灯珠全亮控制

Technical Parameters
Voltage :AC100V-240V, 50-60HZ
Maximum power :350W
Light source: 7 40W four-in-one LED beads
Temperature :2800K-8500K
The lifespan of the lamp beads: 50,000 hours
Display: Color Spot Angle :4.5-45
Control: DMX512, voice control, self-propelled
Channel :17CH/21CH/21CH/29CH
Horizontal scan :540° Vertical scan :270°
Stroboscopic effect :1-25 per second, randomly selected
Dimensions: 17x18.5x34.5 (mm) Weight: 6.2kg
Functional effects: It features CTO, dyeing, beam, effect type (vortex, kaleidoscope), variable direction and stepless rotation of the front mirror disk, and full light control of the LED beads





SF-LM009

LED36颗12W摇头染色
LED36×12W Moving Head Wash Light



技术参数
电压:AC100-240V 50/60Hz
功率:400W
控制通道:16CH
光源:36颗*10W 4合1
功能:主从，声控，自走，DMX512
频闪:1-20次/秒
调光:0-100% 线性调光
X轴:540°
垂直:270°
包装尺寸:400x300x480mm
净重:11kg
毛重:12kg

Technical Parameters
Voltage :AC100-240V 50/60Hz
Power :400W
Control channel :16CH
Light source :36 pieces *10W 4-in-1
Functions: Master-slave, voice control, self-propelled, DMX512
Stroboscopic :1-20 times per second
Dimming :0-100% linear dimming
X-axis :540°
Vertical :270°
Packaging size :400x300x480mm
Net weight :11kg
Gross weight :12kg





SF-LM045

600W摇头面光灯

600W LED Moving Head Wash Light (COB Source)



技术参数

电压:AC100V-240V 50/60HZ
色温:2800K-6000K色温校正
使用寿命:50000小时（制造商额定使用寿命）
颜色:带有8种颜色+白光（可做颜色渲染效果）
镜头:高精密胶合光学镜头。
柔光效果:可调节柔光的光斑角度大小
调焦:线性调焦。
调光:1-100%线性调节
显示指数:95通道数量:12CH
控制方式:主从，自走，标准DMX512
投射光范围:X:540°Y:250°
可自动校正定位
光斑角度:5-60°
马达数量:共6个超静音马达
外观:耐高温阻燃塑料防护
等级:IP20 重量:12.3kg

Technical Parameters

Voltage :AC100V-240V, 50/60HZ
Color temperature :2800K-6000K
color temperature correction
Service life: 50,000 hours
(manufacturer's rated service life)
Color: With 8 colors + white light
(color rendering effect available)
Lens: High-precision glued optical lens
Soft light effect: The spot Angle of the
soft light can be adjusted
Focusing: Linear focusing.
Dimming :1-100% linear adjustment
Display index :95 Number of channels :12CH
Control mode: Master-slave, self-driven,
standard DMX512
Projected light range :X:540°Y:250°
Spot Angle :5-60°
Appearance: Protected by high-temperature
resistant and flame-retardant plastic
Grade :IP20 Weight :12.3kg





SF-LM046

400WLED摇头调焦面光灯

400W LED Zoom Moving Head Wash Light



技术参数

额定电压：AC100V-240V
额定频率：50/60HZ色温：2800K-6000K
色温校正
使用寿命：50000小时(制造商额定使用寿命)
颜色：带有2种颜色+白光(可做颜色渲染效果)
镜头：高精密胶合光学镜头。
柔光效果：可调节柔光的光斑角度大小。
调焦：线性调焦。
调光：1-100%线性调节。
显示指数：90 通道数量：11CH
控制方式：主从，自走，标准DMX512
投射光范围：X向540°，Y向250°，
可自动校正定位。
光斑角度：：5-60°.
马达数量：共4个超静音马达。
外观：耐高温塑料+模压合金材料防护
等级：IP20
重量：12Kg

Technical Parameters

Rated voltage: AC100V-240V
Rated frequency: 50/60HZ
Color temperature: 2800K-6000K
Service life: 50,000 hours
(manufacturer's rated service life)
Color: With 2 colors + white light
(color rendering effect available)
Soft light effect: The spot
Angle of the soft light can be adjusted.
Focusing: Linear focusing.
Dimming: 1-100% linear adjustment.
Display index: 90 Number of channels: 11CH
Control mode: Master-slave, self-driven,
standard DMX512
Projected light range: X:540°, Y:250°
Spot Angle: 5-60°
Appearance: Protected by high-temperature
resistant plastic and molded alloy materials
Grade: Ip20 Weight: 12Kg





SF-LM052


马田150W调焦面光灯+辅光

Martin 150W Zoom Moving Head Wash Light with Auxiliary LEDs



技术参数

电压：100 - 240V,50/60Hz 功耗：150w
1个120W RGBL LED和24个5050 X 0.1W RGB
通道模式：20CH-1/36CH/108CH/20CH-2
光束角度/变焦：4°-48°
平移扫描540°（16位）电校正
倾斜扫描：220°（16位）电校正
电子调光：0 - 100% 电子快门：0 - 20Hz
电源连接：电源扭入/扭出DMX
连接：5针XLR输入/输出
防护等级：IP20 净重:8kg 毛重: 9kg
包装尺寸:52 * 37.5 * 29cm

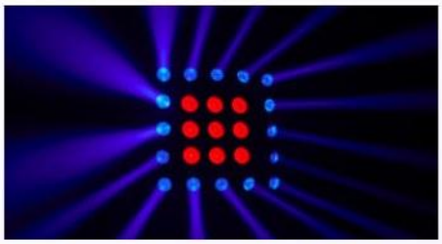

Technical Parameters

Voltage: 100-240V,50/60Hz
Power consumption: 150w
One 120W RGBL LED and 24 5050 X 0.1W RGB
Channel mode: 20CH-1/36CH-108CH-20CH-2
Beam Angle/zoom: 4°-48°
Translation scan 540° (16-bit) electrical correction
Tilt scan: 220° (16-bit) electrical correction
Electronic dimming: 0-100% Electronic shutter: 0-20Hz
Power connection: Plug in/unplug the power into the DMX
Connection: 5-pin XLR input/output
Protection grade: Ip20 Net weight :8kg
Gross weight: 9kgPackaging size :52 * 37.5 * 29cm



SF-LM053

120W双色摇头聚光灯

120W Bi-Color LED Moving Head Spot Light



技术参数

输入电源：AC100-240V 50/ 60hz 功耗：140W
LED光源：120W CC+WW LED
光源：三色5050 SMD LED （RGB）
灯寿命：灯寿命5000小时，能耗低
DMX通道：20通道 连续波:5600 k
WW: 3200 k 颜色宏 波束角度：9°
移动：平移540度，倾斜270度
控制模式：自动，声音，DMX，主/从
显示:LED显示屏
PowerCON输入/输出 XLR输入/输出
尺寸：32 x 26x 23(cm)
净重: 3.5kg 毛重: 4.5kg



Technical Parameters

Input power:AC100-240V 50/60 Hz Power consumption :140W
LED Source: 120W CC+WW LED
LED Strip Source :tri-colour 5050 SMD LEDs (RGB)
Lamp life : 5000 hours lamp lifespan and low consumption
DMX channel:20 channels CW :5600K WW: 3200K
Color Macro Beam angle: 9°
Movement :pan 540 degree , tilt 270 degree
Control mode:Auto, Sound, DMX, Master/Slave
Display:LED display Quick release omega clamps included
PowerCON input/output 3-Pin XLR input/output
Size : 32 x 26x 23cm N.W: 3.5kg G.W:4.5kg



SF-LM054

120W四色摇头染色

120W LED 4-in-1 RGBW Moving Head Wash Light



技术参数

输入电源：AC100-240V 50/ 60hz 功耗：140W
LED光源：120W RGBW LED
灯寿命：灯寿命5000小时，能耗低
DMX通道：16通道
首席技术官:2800 k - 8500 k
颜色宏 波束角度：25°
移动：平移540度，倾斜270度
控制模式：自动，声音，DMX，主/从
显示:LED显示屏
PowerCON输入/输出 XLR输入/输出
尺寸：32 × 26 × 23(cm)
净重: 3.5kg 毛重: 4.5kg



Technical Parameters

Input power:AC100-240V 50/60 Hz
Power consumption :140W
LED Source: 120W RGBW LED
Lamp life : 5000 hours lamp lifespan
and low consumption
DMX channel:16 channels
CTO :2800K-8500KColor MacroBeam angle: 25°
Movement :pan 540 degree , tilt 270 degree
Control mode:Auto, Sound, DMX, Master/Slave
Display:LED display
Quick release omega clamps included
PowerCON input/output3-Pin XLR input/output
Size : 32 x 26x 23 cm N.W: 3.5kg G.W:4.5kg



China2EU

LED摇头效果灯系列

LED Moving Head Effect Light Series



SF-LME001

五眼通天炮摇头灯

LED 5 x 80w Beam Moving Head Light



技术参数

输入电压:AC100-240V，50-60hz
功耗:400W灯珠:5*80W RGBW
光源，辅助灯4＊10w金色光源透镜光束
输出直径:100毫米
光束角:3.5度
金色光束角:5.5度
调光器:0～100%超平滑调光
频闪:25次/秒
控制信号:DMX 512/主从/声音/自走式
控制通道:15/20 / 28CH
特征:支持电机位置校正，5个RGBW轻宏，4个金色轻宏，丰富效果宏功能
净重:9.5kg 毛重:10.8kg
产品尺寸:890(L)* 180(W)* 310(H)mm
包装尺寸:950(L)* 230(W)* 350(H)mm

Technical Parameters

Input voltage :AC100-240V, 50-60hz
Power consumption :400W,
Lamp beads :5*80W, RGBW
Light source, auxiliary lamp 4 * 10w golden light source lens beam
Output diameter :100 millimeters
Beam Angle :3.5 degrees
Golden beam Angle :5.5 degrees
Dimmer: 0-100% ultra-smooth dimming
Stroboscopic :25 times per second
Control signal :DMX 512/ Master-slave/ Sound/Self-propelled
Control channel: 15/20/28CH
Features: Supports motor position correction, 5 RGBW light macros
Four golden light macros, rich effect macro functions
Net weight :9.5kg \ nGross weight :10.8kg
Product size :890(L)* 180(W)* 310(H)mm
Packaging size :950(L)* 230(W)* 350(H)mm





SF-LME002

LED五头龙卷风光束灯

LED Five-head Tornado Beam Light




技术参数

工作电压:AC220V/50Hz
产品功率:400W灯珠
参数:5颗80W RGBW光源
加4颗10W金黄光光源
控制方式:国际通用DMX512光束
出光口径:100;
光束角度:3.5度
金黄光光束角度:5.5度
调光方式:0~100%超平滑调光
频闪:25次/秒

Technical Parameters

Working voltage :AC220V/50Hz
Product power :400W
Lamp bead parameters :5 80W RGBW light sources plus 4 10W golden light sources
Control mode: Internationally recognized DMX512
The light output diameter of the optical card 100;
Light east Angle :3.5 degrees.
Golden light beam Angle :5.5 degrees
Dimming mode :0-100% ultra-smooth dimming
Stroboscopic :25 times per second

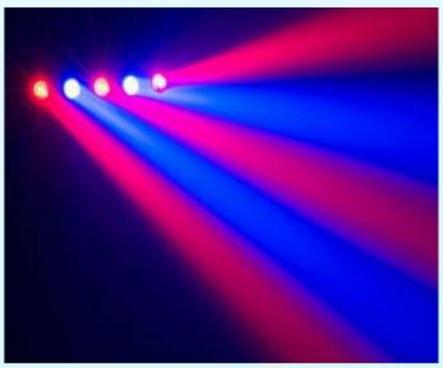



SF-A013

LED5眼60W变焦光束

LED 5 x 60W Zoom
Beam Light




技术参数

输入电源:AC100-240V
电源频率:50/60Hz
功率:480W
灯珠:6070灯珠60W*5颗。
7070灯珠96颗，分12段。5050灯珠72颗
调光:0-100%线性调光
水平扫描:540°(16bit精度)
垂直扫描:270°(16bit精度)
频闪:1S/25(内置多种频闪效果)
产品尺寸:52.5*18*36.5 cm
净重:12KG

Technical Parameters

Input power:AC100-240V
Power frequency:50/60Hz
Power:480W
Lamp beads: 6070 lamp beads 60W * 5pcs.
7070 lamp beads 96pcs. in 12 sections.
5050 lamp beads 72pcs.
Dimming: 0-100% linear dimming
Horizontal scanning: 540° (16bit precision)
Vertical scanning:270°(16bit precision)
Strobe: 1S/25 (built-in strobe effect)
Product size:52.5*18*36.5 cm
Net weight:12KG

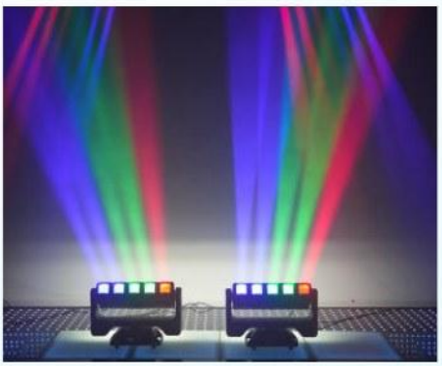



SF-A014

LED12颗40W调焦光束

LED 12x40W Zoom
Beam Light



技术参数

电压:AC100-240V50/60HZ
额定功率:500W12*40W4合1RGBWLED
平均寿命:>=50000小时
调光:0-100% 精简调光
颜色:均匀的RGBW宏色彩美妙的彩虹效果
冷却系统:风扇强制冷却系统性
产品尺寸:102*10.75*26.2(cm)
包装尺寸:110*18*35.5(cm)
产品重量:15kg

Technical Parameters

Voltage:AC100-240V50/60HZ
Rated power:500W12*40W4in1RGBWLED
Average lifespan:>=50000hours
Dimming: 0-100% streamlined dimming
Color: uniform RGBW macro color
wonderful rainbow
effect cooling system: fan forced
cooling system sex
Product Size:102*10.75*26.2(cm)
Package Size:110*18*35.5(cm)
Product weight:15kg





SF-A029

12颗60W千手观音
12x60W LED Kinetic Moving Head Light




技术参数

电压: AC100~240V 50/60HZ
功率: 12*60W(800W)
灯珠: 12颗四合一60瓦LED灯珠
控制方式: DMX512,自走,主从,声控,带RDM功能
调光: 32bit 0~100%线性调光
特点:单颗摇摆+染色+光束
工作温度: -30度~50度
频闪频率: 1~30HZ
连接方式: DMX512
输入输出/电源输入输出
IP 等级: IP20尺寸: 1000*300*100 (cm)

Technical Parameters

Voltage: AC100~240V 50/60HZ
Power: 12*60W (800W)
Lamp beads: 12 four-in-one 60W LED lamp beads
Control mode: DMX512, self-propelled, master-slave,
voice-activated, with RDM function.
Dimming: 32bit 0~100% linear dimming
Features: Single Swing + Dye + Beam
Operating Temperature:
-30 degree~50 degree
Strobe Frequency: 1~30HZ
Connection: DMX512 input and output/power input and output.
IP Rating: Ip20 Size: 1000*300*100(cm)

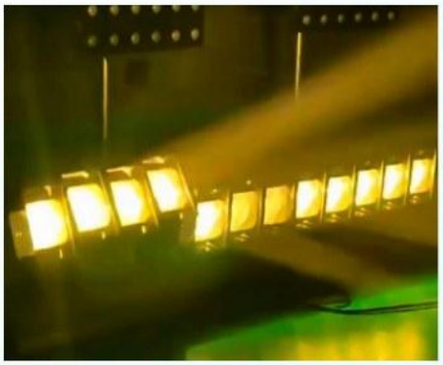



SF-A030

940摇头响尾蛇
LED 9x40W RGBW Zoom Pixel Bar Moving Head Light




技术参数

光束端:9 x 40W RGBW LED
频闪端:54 x 1W CW LED
54 x 1W WW LED/54x 0.5W RGB LED
白光色温: 6,300K
LED预期寿命: 20,000小时
缩放角度:光束角度: 2.8°-31° (光束端)
光斑角度: 5°-50° (光束端)
通道模式: CH29,CH34,CH38,CH61
X轴无极旋转,Y轴运作角度: 202°
输入电源: 180-240V~ 50/60Hz
功率: 500 W
电源插座: 电源连接器输入/输出
灯具尺寸:600 mm (60")*270 mm (27") *328 mm (32.8")

Technical Parameters

Beam Section: 9 x 40W RGBW LEDs
Strobe Section: 54 x 1W CW LEDs / 54 x 1W WW LEDs / 54 x 0.5W RGB LEDs
White Light Color Temperature: 6,300K
LED Expected Lifespan: 20,000 hours
Beam Angle: 2.8°–31° (Beam Side)
Spot Angle: 5°–50° (Beam Side)
Channel Modes: CH29, CH34, CH38, CH61
Stepless rotation on X-axis;
Y-axis operating angle: 202°
Input Voltage: 180–240 V AC, 50/60 Hz
Power: 500 W
Power Connector: Power connector input/output
Luminaire Dimensions:
600 mm (60") × 270 mm (27") × 328 mm (32.8")

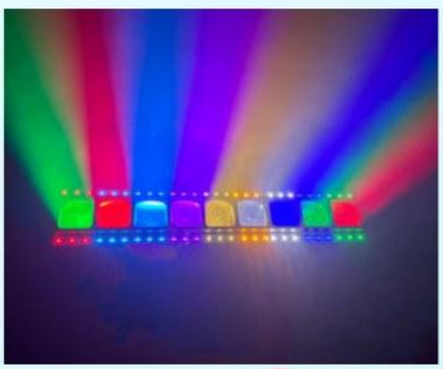



SF-A031

10颗80W矩阵灯
10 x 80W Matrix Lights



技术参数

电压: AC100~240V 50/60Hz
控制方式: DMX512、自走、主从、
声控、带RDM功能
灯珠: 10颗80瓦 暖白灯珠+
辅光RGB灯珠180颗
通道: CH4、CH15、CH24
调光: 32bit 0~100%线性调
光特点: 光束+爆闪+辅光+染色
工作温度: -30度~50度
频闪频率: 1~30Hz
外观: 金属、黑色
连接方式: DMX512,输入输出 / 电源输入输出
IP 等级: IP20
重量: 18.5kg
产品尺寸: 57.5*23*22cm
包装尺寸: 64*30*29cm

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Control Modes: DMX512, Standalone,
Master/Slave, Sound Control, RDM-enabled
LEDs: 10 x 80W warm white LEDs + 180 x RGB auxiliary LEDs
Channels: CH4, CH15, CH24
Dimming: 32-bit 0–100% linear dimming
Lighting Features: Beam + Strobe +
Auxiliary Lighting + Color Chasing
Operating Temperature: -30°C to 50°C
Strobe Frequency: 1–30 Hz
Finish: Metal, Black
Connectivity: DMX512 (Input/Output) /
Power Input/Output
IP Rating: Ip20 Weight: 18.5 kg
Product Dimensions: 57.5 × 23 × 22 cm
Packaging Dimensions: 64 × 30 × 29 cm





SF-A032

五合一效果灯
5-in-1 Effect Light



技术参数

电压:AC100~240V 50/60HZ
功率:1000W
光源:光束:5*40WRGBW;
光束辅光:冷白:2*(7*4*0.2W)
暖白:2*(7*4*0.2W);
频闪:冷白: 2*(9*10*1W)
暖白:2*(9*10*1W),复古:2*60WLED
跑马:2*(7*40*0.2W)RGB
激光:5*0.5WRGB,灯带,5*(25*0.2W)RGB
工作环境温度: 0°~ 45° 频闪频率: 1~30Hz
外观: 金属、黑色 IP 等级: IP20
连接方式:DMX512 输入输出/电源输入输出
尺寸:542 *275 * 464 mm
重量:19.55kg

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Power: 1000 W
Light Source: Main Beam: 5 × 40 W RGBW;
Beam Auxiliary Lighting:
Cool White: 2 × (7 × 4 × 0.2 W)
Warm White: 2 × (7 × 4 × 0.2 W);
Strobes: Cool White: 2 × (9 × 10 × 1 W)
Warm White: 2×(9×10×1W), Retro: 2×60W LED
Running Light: 2×(7×40×0.2W) RGB
Laser: 5×0.5W RGB, LED Strip: 5×(25×0.2W) RGB
Operating Temperature: 0°C to 45°C
Strobe Frequency: 1–30 Hz
Finish: Metal, Black
IP Rating: IP20
Connectivity: DMX512 Input/Output,
Power Input/Output
Dimensions: 542 × 275 × 464 mm
Weight: 19.55 kg





SF-A033

五颗RGB黄金眼
Five RGB Golden Eyes




技术参数

电压:AC100~240V 50/60Hz
功率: 850W光源:5*150W RGB、
辅光圈:5*32*0.2WRGB、
辅光条:2*57*0.2WRGB
光束角度:13°-15° 光斑角度: 20°-27°
控制方式::DMX512/自走/声控/主从/
带 RDM 功能
通道:28CH.58CH.68CH.118CH.145CH
调光:16bit 0~100%线性调光
特点:采用 5 颗 150W RGB 灯珠逐点控制,
带有丰富的辅光效果
工作环境温度: -25°~ 45°
频闪频率: 1~30HZ
外观: 金属、黑色 IP 等级: Ip20
尺寸: 972*218*199MM (38.3" x 8.6" x 7.8")
重量: 8.6KG (19lbs)

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz Power: 850W
Light Source: 5 x 150W RGB; Auxiliary Ring Lights:
5 x 32 x 0.2W RGB; Auxiliary Strip Lights:
2 x 57 x 0.2W RGB
Beam Angle: 13°–15° Spot Angle: 20°–27°
Control Modes: DMX512, Standalone,
Sound Control, Master/Slave, RDM Support
Channels: 28CH, 58CH, 68CH, 118CH, 145CH
Dimming: 16-bit 0–100% linear dimming
Features: Utilizes 5 individually controlled 150W
RGB LEDs with rich auxiliary lighting effects
Operating Temperature: -25°C to 45°C
Strobe Frequency: 1–30 Hz
Finish: Metal, Black IP Rating: IP20
Dimensions: 972 x 218 x 199 mm (38.3" x 8.6" x 7.8")
Weight: 8.6 kg (19 lbs)



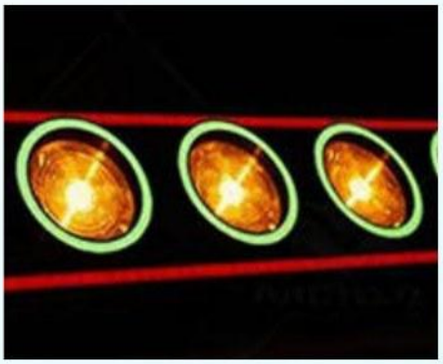

SF-A034

黄金龙效果灯
Golden Dragon Effect Light



技术参数

电压:AC100~240V 50/60Hz 功率:800W
光源:光束金黄光:12*5w,光束辅光 RGB:
48*3*0.2w光束箭头白光:24*7*0.2w
频闪正白:24*16*0.2w,频闪暖白:
48*16*0.2w,复古暖白:5*25W,
复古 RGB 辅光:5*(34+34+48)*0.2w
RGB 染色:24*32*0.2w,RGB 灯带:4*56*0.3W
控制方式: DMX512/自走/声控/主从/
带 RDM 功能。
调光:16bit 0~100%线性调光
工作环境温度: -25°~ 45°
频闪频率: 1~30Hz
外观: 金属、黑色 IP 等级: IP20
尺寸: 1050*214*303mm 重量: 16.7kg

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz Power: 800W
Light Sources: Golden Beam Light: 12 × 5W;
RGB Auxiliary Beam Light: 48 × 3 × 0.2W
White Arrow Beam Light: 24 × 7 × 0.2W
Strobing Pure White: 24 × 16 × 0.2W;
Strobing Warm White: 48 × 16 × 0.2W
Retro Warm White: 5×25W; Retro RGB
Auxiliary Light: 5×(34+34+48)×0.2W
RGB Color Wash: 24×32×0.2W;
RGB Light Strip: 4×56×0.3W
Control Methods: DMX512, Standalone, Sound
Control, Master/Slave, with RDM functionality.
Dimming: 16-bit 0–100% linear dimming
Operating Temperature: -25°C to 45°C
Strobe Frequency: 1–30 Hz Finish: Metal, Black
IP Rating: IP20
Dimensions: 1050 × 214 × 303 mm
Weight: 16.7 kg





SF-A035

飞火流星
Shooting Stars



技术参数

额定电压:AC100-240V 50-60Hz
额定功率:240W 灯珠:6颗40W RGBW
冷却系统:铝散热,风冷
透镜:高精度光学镜头组光束角度:2°
调光:0-100%线性调光 频闪:0-20次 / 秒
控制模式:DMX512 / 主从 / 同步
扫描速度:水平540°,垂直340°
扫描微调:8 / 16Bit
灯净重:5.8KG每台毛重:6.9KG 每箱毛重:14.7KG
内箱尺寸:36*28*42CM
外箱尺寸:58*38*44CM(2台/箱)



Technical Parameters

Rated voltage: AC100-240V 50-60Hz Rated power: 240W
Lamp beads: 6pcs 40W RGBW
Cooling system: aluminum heat dissipation, air-cooled
Lens: High precision optical lens set
Beam angle: 2°
Dimming: 0-100% linear dimming
Strobe: 0-20 times / sec
Control mode: DMX512 / master-slave / synchronization
Scanning speed: horizontal 540°,
vertical 340°
Scanning fine-tuning: 8/16Bit
Lamp net weight: 5.8KG
Gross weight per unit: 6.9KG
Gross weight per box: 14.7KG
Inner box size:36*28*42CM
Outer box size:58*38*44CM(2pcs/ctn)



SF-LM017

LED180W摇头光束灯
带光圈
LED 180W Moving Beam Light
+Light Strip



技术参数

电源:AC100-240V，550160HZ
产品功率:180W
光源:欧司朗灯泡180W
控制方式:DMX512/声控/主从/自走
通道:12通道图案盘:8个图案+白光
色盘:8种颜色+白光棱镜:6+12棱镜
旋转:水平540°垂直270°
灯体尺寸:320x200x200mm
净重:3kg
毛重:5kg



Technical Parameters

Power supply :AC100-240V, 550160HZ
Product power :180W
Light source: Osram bulb 180W
Control mode :DMX512/ Voice control/master-slave/self-drive
Channel :12 channels
Pattern plate :8 patterns + white light
Color palette :8 colors + white light
Prism :6+12 prism
Rotation: 540° horizontally, 270° vertically
Lamp body size :320x200x200mm
Net weight :3kg Gross weight :5kg



SF-LM018

LED迷你摇头双响炮
LED Mini Dual-Head
Moving Head Beam Light




技术参数

电压:AC100-240V,50-60HZ
功率180W
光源:2颗60W四合一灯珠,
40颗RGB贴片灯珠
通道:24/16CH
控制模式:声控，主从，自走，DMX512
水平:540°，垂直:180°
尺寸：145*255*450（mm）



Technical Parameters

Voltage: AC 100–240 V, 50–60 Hz
Power: 180 W
Light Source: 2 x 60 W 4-in-1 LEDs,
40 x RGB SMD LEDs
Channels: 24/16 CH
Control Modes: Sound-activated,
Master/Slave, Auto-run, DMX512
Horizontal: 540°, Vertical: 180°
Dimensions: 145 x 255 x 450 (mm)

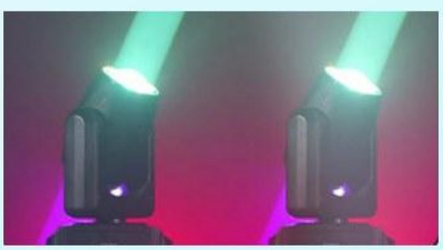

SF-LME003

六颗蜂眼+激光+灯带
Six Bee Eyes + Laser + Light Strip





技术参数

电源供应：AC95V-245V/50Hz
产品功率：100W
(蜂眼 72W,100MW 绿激光，5W柔性灯带)
灯珠参数：6颗CREE四合一灯珠，
100MW绿激光，0.2W 24颗柔性灯带
控制方式：国际通用DMX512，17通道
工作模式：DMX512,主/从机,自走,声控
调光方式：0到100%超平滑调光
频闪：20次/秒
散热：铝制品散热、风扇强制散热

Technical Parameters

Power supply: AC95V-245V/50Hz
Product power: 100W
(Bee Eye 72W,100MW green laser,
5W flexible light strip)
Lamp bead parameters: 6 CREE 4-in-1 lamp beads, 100MW green laser,
0.2W 24 flexible light strips
Control mode: Internationally standard DMX512, 17 channels
Working mode: DMX512, master/slave, auto-drive, voice control
Dimming mode: 0 to 100% ultra-smooth dimming
Stroboscopic: 20 times per second
Heat dissipation: Heat dissipation through aluminum products,
forced heat dissipation by fans

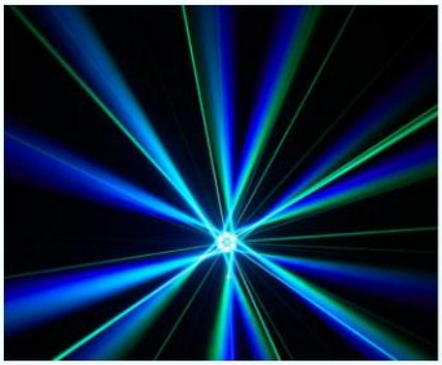

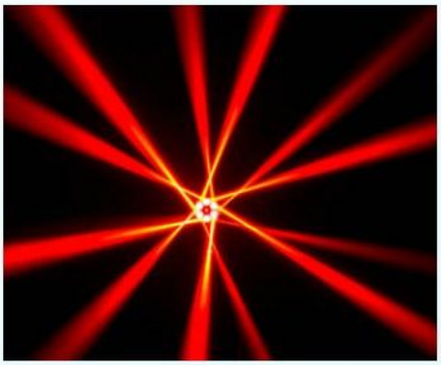

SF-LM020

LED100/150W大钢炮光束灯（黑色款）
LED 100/150W Beam Light (Black Style)



技术参数

电源:AC100-240V，50160Hz
产品功率:150W
光源:欧司朗灯泡150W
控制方式:DMX512/声控/主从/自走
通道:12通道
图案盘:8个图案+白光
色盘:8种颜色+白光
棱镜:6+12棱镜
旋转:水平540°垂直270°
灯体尺寸:320x250x250mm
净重:3.5kg
毛重:5.5kg

Technical Parameters

Power supply :AC100-240V, 50-160Hz
Product power :150W
Light source: Osram bulb 150W
Control mode :DMX512/ Voice control/ master-slave/self-drive
Channel :12 channels
Pattern plate :8 patterns + white light
Color palette :8 colors + white light
Prism :6+12 prism
Rotation: 540° horizontally, 270° vertically
Lamp body size :320x250x250mm
Net weight :3.5kg
Gross weight :5.5kg





SF-LM026

LED四头风火轮+灯带

LED 4-Head Rotating Beam Effect Light with RGB LED Strips



技术参数

电源:AC90-245V，50/60Hz
产品功率:220W
光源:16颗10W四合一灯珠两颗10W自闪1颗100MW红激光1颗50MW绿激光
光效:红绿蓝白及混色光束+红绿激光+自光频闪
控制方式:DMX512/声控/主从/自走
闪频:20次/秒
调光:0-100%超光滑调光
适用场所:酒吧 婚庆 舞台 演出
灯体尺寸:330x330x310mm
净重:6kg
毛重:8kg

Technical Parameters

Power supply :AC90-245V, 50/60Hz
Product power :220W
Light source :16pcs 10W four-in-one LED beads, 2 pcs10W self-flaring beads, 1 pcs100MW red laser, and 1 pcs50MW green laser
Light effect: red, green, blue, white and mixed-color beams + red and green lasers + self-luminous stroboscopic
Control mode :DMX512/ Voice control/ master-slave/self-drive
Flash frequency :20 times per second
Dimming :0-100% ultra-smooth dimming
Applicable places: bars, wedding ceremonies, stage performances
Lamp body dimensions :330x330x310mm
Net weight :6kg Gross weight :8kg





SF-LM027

LED三头风火轮+灯带

LED 3-Head Rotating Beam Effect Light with LED Strips



技术参数

电源:AC90-245V，50/60Hz
产品功率:180W
光源:12颗10W四合一灯珠1颗100MW红激光，1颗100MW绿光激光，1颗100MW蓝色激光
控制方式:DMX512/声控/主从/自走
闪频:20次/秒
调光:0-100%超光滑调光
适用场所:酒吧 婚庆 舞台 演出
灯体尺寸:330x330x310mm
净重:5kg
毛重:7kg

Technical Parameters

Power supply :AC90-245V, 50/60Hz
Product power :180W
Light source :12 pcs10W four-in-one LED beads, 1pcs 100MW red laser, 1 pcs100MW green laser, and 1pcs 100MW blue laser
Control mode :DMX512/ Voice control/ master-slave/self-drive
Flash frequency :20 times per second
Dimming :0-100% ultra-smooth dimming
Applicable places: bars, wedding ceremonies, stage performances
Lamp body dimensions :330x330x310mm
Net weight :5kg
Gross weight :7kg





SF-LM028

LED双头风火轮+灯带

LED Dual-Head Rotating Beam Effect Light with LED Strips





技术参数

电源:AC90-245V，50/60Hz
产品功率:160W
光源:8颗10W四合一灯珠1颗100MW红激光
1台100MW绿光激光器
控制方式:DMX512/声控/主从/自走
闪频:20次/秒
调光:0-100%超光滑调光
适用场所:酒吧 婚庆 舞台 演出
灯体尺寸:330x330x310mm
净重:4kg
毛重:6kg

Technical Parameters

Power supply :AC90-245V, 50/60Hz
Product power :160W
Light source :8 10W four-in-one LED beads and 1pcs 100MW red laser
1pcs 100MW green light laser
Control mode :DMX512/ Voice control/ master-slave/self-drive
Flash frequency :20 times per second
Dimming :0-100% ultra-smooth dimming
Applicable places: bars, wedding ceremonies, stage performances
Lamp body dimensions :330x330x310mm
Net weight :4kg
Gross weight :6kg

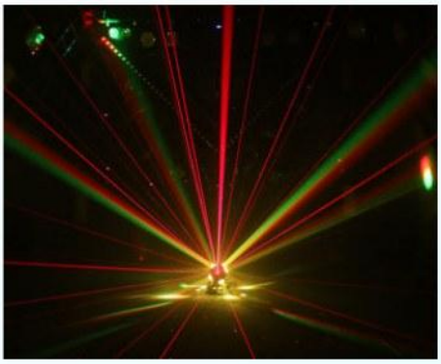

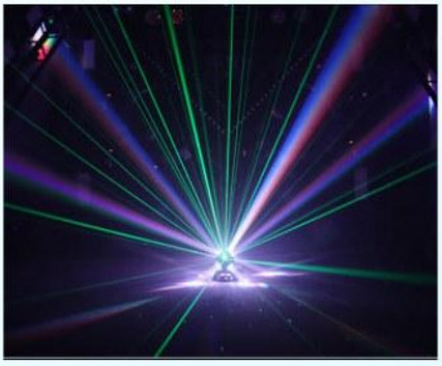

SF-LM032

LED手臂风火轮

LED Robotic Arm Rotating Beam Light



技术参数

电压:AC90-240V
功率:150W
频闪:20次/秒
频率:50/60Hz
灯珠:8颗15WCREE四合一灯珠,
2颗100MW红激光，2颗50Mw绿激光
重量:5.2kg
控制模式:DMX/主从/声控/自走
通用范围:酒吧 婚庆 舞台 演出

Technical Parameters

Voltage :AC90-240V
Power :150W
Stroboscopic :20 times per second
Frequency :50/60Hz
Led beads :8 pcs15WCREE 4-in-1 LED beads,
2 pcs100MW red lasers,
and 2 pcs 50Mw green lasers
Weight :5.2kg
Control mode :DMX/ Master-slave/ Voice control/Auto Drive
General scope: Bar wedding stage performances





SF-LM033

LED三头18颗四合一光束灯

LED 3-Head 18x4-in-1 Beam Moving Head Light



技术参数

电源: AC90-250V，50/60Hz
产品功率:250W
光源 :18颗RGB全彩灯珠+4 颗10W图案灯珠+3颗10W频闪灯珠+红/绿/蓝激光
光效:红绿蓝白及混色光束+红绿蓝激光+频闪+图案
控制方式:DMX512/声控/主/自走
频闪:1-20次/秒
适用场所:酒吧 婚庆 舞台 演出
灯体尺寸:350x180x350mm
净重:8kg
毛重:10kg

Technical Parameters

Power supply: AC90-250V, 50/60Hz
Product power :250W
Light source :18 RGB full-color light beads + 4 pcs10W pattern light beads +3 pcs10W stroboscopic light beads + red/green/blue lasers
Light effects: red, green, blue, white and mixed-color beams + red, green and blue lasers + stroboscopic + patterns
Control mode :DMX512/ Voice control/ Main/automatic
Stroboscopic :1-20 times per second
Applicable places: bars, wedding stages, performance lamps
Size :350x180x350mm
Net weight :8kg
Gross weight :10kg





SF-LM034

LED三头18颗光束+激光

LED 3-Head 18x Beam Moving Head Light with Laser





技术参数

电源:AC100-240V，50/60Hz
光源:18pcs*10W 4in1
功率:220W
颜色:RGB无极混色
频闪:1-20次/秒
模式:声控、自走、DMX512、主从
重量:6.5KG
尺寸:90x60x120mm

Technical Parameters

Power supply :AC100-240V, 50/60Hz
Light source :18pcs*10W 4in1
Power :220W
Color :RGB infinite mixed color
Stroboscopic :1-20 times per second
Mode: Voice control, self-propelled, DMX512, master-slave
Weight :6.5KG
Size :90x60x120mm

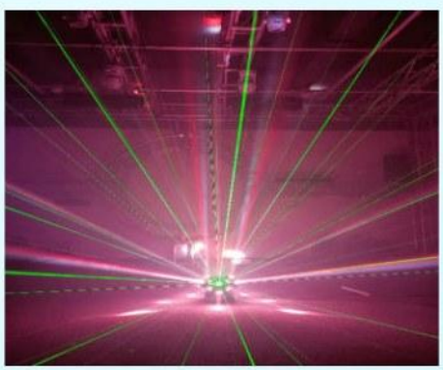

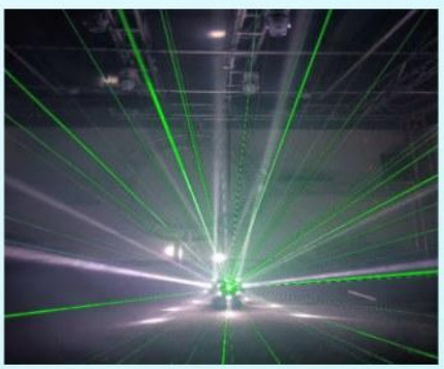

SF-LM035

LED双头12颗双臂光束灯+激光

LED Dual-Arm Dual-Head 12x Beam Moving Head Light with Laser







技术参数

电压:AC100-240V 50/60Hz
功率:120W
光源:12pcs*10W 4in1
产品尺寸:200x160x275mm
功能模式:声控、自走、DMX512
适用环境:酒吧、KTV、小型汇演等
净重:5KG

Technical Parameters

Voltage :AC100-240V 50/60Hz
Power :120W
Light source :12pcs*10W 4in1
Product size :200x160x275mm
Function modes: Voice control, self-propelled, DMX512
Applicable environments: bars, KTVS, small-scale performances, etc
Net weight :5KG

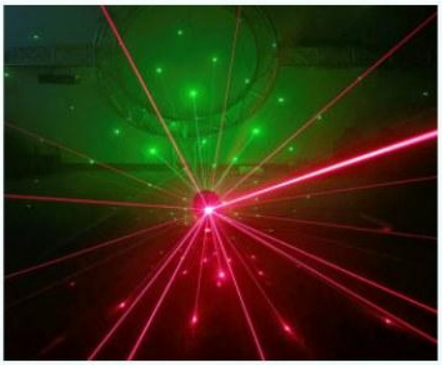

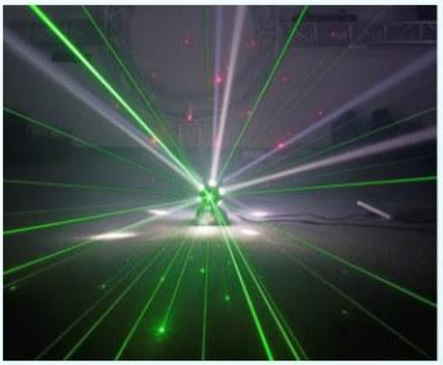

SF-LM036

LED18颗幻影+激光

LED 18x Phantom Beam Effect Light with Laser






技术参数

电源: AC110/220V 50-60Hz
光源:18PCS*10W
功率:200W
控制模式:自走，声控，DMX512，主从
净重:4.9KG
毛重: 6.1KG
产品尺寸: 35*18*32cm
内包装尺寸: 40*28*43cm
外包装尺寸: 59*42*46cm
2PCS/CTN(13.4KG)

Technical Parameters

Power supply: AC110/220V 50-60Hz
Light source :18PCS*10W
Power :200W
Control mode: Auto, voice control, DMX512, master-slave
Net weight :4.9KG
Gross weight: 6.1KG
Product size: 35*18*32cm
Inner packaging size: 40*28*43cm
Outer packaging size: 59*42*46cm
2 PCS/CTN (13.4 KG)

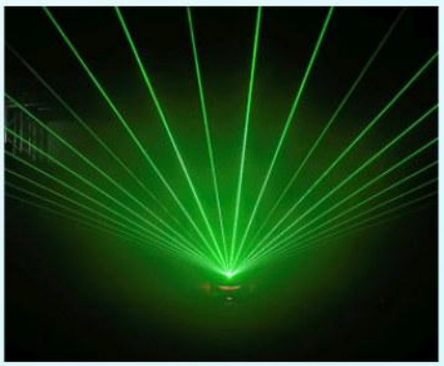



SF-LM037

LED12颗光束灯

LED12 Beam Light





技术参数

电源:AC100-240V 50/60Hz
光源:12pcs*10W 4in1
功率:120W
控制模式:自走，声控，DMX512，主从
净重:4.5KG
毛重:5.25KG
内包装尺寸:31x21.5x39cm
外包装尺寸:64x45x41cm

Technical Parameters

Power supply :AC100-240V 50/60Hz
Light source :12pcs*10W 4in1
Power :120W
Control mode: Auto, voice control, DMX512, master-slave
Net weight :4.5KG
Gross weight :5.25KG
Inner packaging dimensions :31x21.5x39cm
Outer packaging dimensions :64x45x41cm

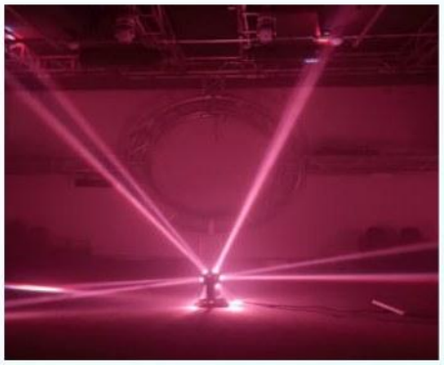

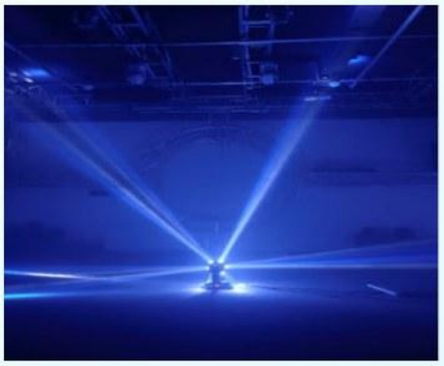

SF-LM038

LED24颗四合一球灯

LED24Pcs 4in1 Ball Light



技术参数

电源:AC100-240V 50-60Hz
光源:24pcs*10W 4in1灯珠
额定功率:180W
功能:DMX，声控，自动控制
模式:DMX512，声控，自走
尺寸:36.5*22*27cm
重量:4.45KG
适用场所:迪斯科舞厅，KTV酒吧，表演，艺术酒吧夜总会，婚礼等

Technical Parameters

Power supply :AC100-240V, 50-60Hz
Light source :24pcs*10W 4in1 LED beads
Rated power :180W
Functions :DMX, voice control, automatic control
Mode :DMX512, voice-controlled, self-propelled
Dimensions :36.5*22*27cm
Weight :4.45KG
Applicable places: Disco halls, KTV bars, performances, art bars and nightclubs, weddings, etc





SF-LM039

LED16颗三合一球灯

LED 16Pcs 3 in1 Ball Light



技术参数

电压:AC100-240V 50/60Hz
光源:16pcs*3W LED(R4 G4 B4 W4)
红激光:2pcs*100MW
绿激光:2pcs*50MW
频闪:4pcs*15W
功率:120W
控制模式:自走，声控，DMX512，主从
净重:4.9KG
毛重:5.65KG
内包装尺寸:310x215x390mm
外包装尺寸:640x460x410mm
4pcs/Ctn

Technical Parameters

Voltage :AC100-240V 50/60Hz
Light source :16pcs*3W LED(R4 G4 B4 W4)
Red laser :2pcs*100MW
Green laser :2pcs*50MW
Stroboscopic effect :4pcs*15W
Power :120W
Control mode: Auto, voice control, DMX512, master-slave
Net weight :4.9KG
Gross weight :5.65KG
Inner packaging dimensions :310x215x390mm
Outer packaging size :640x460x410mm
4pcs/Ctn





SF-LM045

八臂大金刚（魔球款）

LED 8-Arm Moving Head Beam Light (Magic Ball Version)



技术参数

工作电压:AC95V-245V/50HZ
产品功率:240W
灯珠参数:8颗CREE10WRGBW灯珠，1颗3W单色灯珠，100MW红激光，50MW绿激光，38颗幻彩灯带，1颗10W白光频闪，1颗10W金黄光频闪，
控制方式:国际通用DMX512,25通道
工作模式:DMX512,主/从机，自走，声控
调光方式:0~100%超平滑调光
频闪:20次/秒
产品净重:3.2kg
产品尺寸:32*32*23（cm）

Technical Parameters

Operating Voltage: AC 95V–245V / 50Hz
Power Consumption: 240W
LED Parameters: 8 x 10W CREE RGBW LEDs, 1 x 3W monochrome LED, 100mW red laser, 50mW green laser, 38 x color-changing LED strips, 1 x 10W white strobe, 1 x 10W golden strobe,
Control Method: International Standard DMX512, 25 Channels
Operating Modes: DMX512, Master/Slave, Auto, Sound Control
Dimming: 0–100% Ultra-Smooth Dimming
Strobe: 20 times/second
Net Weight: 3.2 kg
Dimensions: 32 × 32 × 23 cm





SF-LM046

八臂大金刚（蜂眼款）

LED 8-Arm Bee Eye Moving Head Light



技术参数

工作电压:AC95V-245V/50HZ
产品功率:240W
灯珠参数:灯珠参数:8颗CREE10W RGBW灯珠,4颗3W单色灯珠，100MW红激光，50MW绿激光，38颗幻彩灯带1颗10W白光频闪，1颗10W金黄光频闪，，
控制方式:国际通用DMX512,25通道
工作模式:DMX512,主/从机，自走，声控
调光方式:0~100%超平滑调光
频闪:20次/秒
产品净重：3.2kg
产品尺寸：32*32*23（cm）

Technical Parameters

Operating Voltage: AC 95V–245V / 50Hz
Power Consumption: 240W
LED Specifications: 8 x 10W CREE RGBW LEDs, 4 x 3W monochrome LEDs, 100mW red laser, 50mW green laser, 38 x multicolor LED strips, 1 x 10W white strobe, 1 x 10W golden yellow strobe,
Control Method: International Standard DMX512, 25 channels
Operating Modes: DMX512, Master/Slave, Auto, Sound Control
Dimming: 0–100% ultra-smooth dimming
Strobe Frequency: 20 times/second
Net Weight: 3.2 kg
Dimensions: 32 x 32 x 23 cm





SF-LM047

战影六臂魔球款

LED 6-Arm Moving Head Beam Light with Magic Ball



技术参数

工作电压:AC95V-245V/50Hz
产品功率:120W
灯珠参数:6颗CREE 10W RGBW灯珠，4个3W红/绿/蓝/白单色灯珠,100mW红激光，50mW绿激光，2颗10W白光频闪，2颗10W金黄光频闪
控制方式:国际通用DMX512，23通道
工作模式:DMX512,主/从机,自走,声控
调光方式:0~100%超平滑调光
频闪:20次/秒
内箱尺寸: 34.5×34×29.5
外箱 装四 :70.5×36×63
净重:2.8 kg/台
毛重:3.65 kg/台

Technical Parameters

Operating Voltage: AC 95V–245V / 50Hz
Power Consumption: 120W
LED Specifications: 6 x 10W CREE RGBW LEDs, 4 x 3W red/green/blue/white monochrome LEDs, 100mW red laser, 50mW green laser, 2 x 10W white strobe LEDs, 2 x 10W golden strobe LEDs
Control Method: International Standard DMX512, 23 channels
Operating Modes: DMX512, Master/Slave, Auto, Sound Control
Dimming: 0–100% ultra-smooth dimming
Strobe: 20 times/second
Inner Box Dimensions: 34.5 × 34 × 29.5 cm
Outer box (4 units): 70.5×36×63
Net weight: 2.8 kg/unit
Gross weight: 3.65 kg/unit





SF-LM048

战影六臂蜂眼款
LED 6-Arm Bee Eye Moving Head Light



技术参数

工作电压：AC95V-245V/50Hz
产品功率：150W
灯珠参数：10颗CREE 10W RGBW灯珠，
100mW红激光，50mW绿激光，
2颗10W白光频闪，2颗10W金黄光频闪，
23颗幻彩灯带
控制方式：国际通用DMX512，26通道
工作模式：DMX512，主/从机，自走，声控
频闪：20次/秒
产品尺寸：长28*宽28*高20cm
内盒尺寸：34*34*25.5cm
外箱装四：70.5*35.5*53cm
净重：2.8Kg 毛重：3.75Kg
装箱重量：8.4Kg 装箱数量：2PCS



Technical Parameters

Operating Voltage: AC 95V–245V / 50Hz
Power: 150W
LED Parameters: 10 CREE 10W RGBW LEDs,
100mW red laser, 50mW green laser, 2 x 10W white strobe LEDs, 2 x 10W golden strobe LEDs,
23 x multicolor LED strips
Control Method: International Standard DMX512, 26 channels
Operating Modes: DMX512, Master/Slave, Auto, Sound Control
Flash Rate: 20 times/second
Product Dimensions: L 28 x W 28 x H 20 cm
Inner Box Dimensions: 34 x 34 x 25.5 cm
Outer Carton Dimensions (4 units): 70.5 x 35.5 x 53 cm
Net Weight: 2.8 kg Gross Weight: 3.75 kg
Packaged Weight: 8.4 kg Packaging Quantity: 2 pcs



SF-LM042

LED双头小壁虎
LED Mini Dual-Head Beam Effect Light



技术参数

额定电压:AC100-240V,50/60HZ
产品功率:120W 频闪:0-20次/秒
灯珠参数:8 颗 10W CREE 四合一灯珠
8 颗 5W 高亮金光频闪灯
1 颗 30MW 红光激光器 1 颗
50MW 绿光激光器
散热系统:对流传热,风冷散热,
工作模式:DMX512 信号/主从/自走/声控
控制方式:国际 DMX512、17CH
扫描速度:水平 5400,
垂直 360 度无极旋转扫描
和微调:8/16 位
尺寸:26*21*29CM
毛重：3.9KG



Technical Parameters

Rated voltage:AC100-240V,50/60HZ
Power:120W Strobe:0-20 times/sec.
Lamp Bead Parameter:8pcs 10W CREE 4-in-1 Lamp Beads
8pcs 5W High brightness gold strobe
1pc 30MW red laser 1pcs 50MW green laser
Heat dissipation system: convection heat transfer, air-cooled heat dissipation.
Working mode: DMX512 signal / master-slave / self-propelled / voice control
Control mode: international DMX512, 17CH
Scanning speed: Horizontal 5400,
Vertical 360-degree infinitely rotatable Scanning and fine-tuning: 8/16 bit
Size:26*21*29CM Gross weight:3.9KG
Translated with DeepL.com (free version)



SF-LM043

LED三头小壁虎

LED 3-Head Gecko Beam Effect Light



技术参数

额定电压:AC100-240V，50/60Hz
额定功率:150W灯珠12颗
10W CREE四合一灯珠,
125W hiahlight 金色频闪,1 个 100MW
红色激光器、1 个 50MW 绿色激光器,
1 个 80MW 蓝色激光器
透镜:独特的透明高聚光透镜
频闪 0-20 次/秒
工作模式 DMX512 信号/主从/自走/声控
控制模式：国际 DMX512.19CH
包装尺寸：28*36*47.5 (1PC)
外包装尺寸：59x37x48CM (4 PCS)
产品重量：4KG (1PCS)



Technical Parameters

Rated voltage AC100-240V, 50/60Hz
Rated power: 150W
Lamp beads 12 10W CREE 4-in-1 lamp beads,
125W hiahlight gold strobe,
1 pcs100MW red laser,
1psc 50MW green laser,
1pcs 80MW blue laser
Lens: unique transparent high concentration lens
Strobe 0-20 times/second
Working mode DMX512 signal / master-slave / self-propelled / voice control
Control mode: international DMX512.19CH
Package size: 28*36*47.5 (1PC)
Outer package size: 59x37x48CM (4 PCS)
Product weight: 4KG (1PCS)
Translated with DeepL.com (free version)



SF-LM044

LED四头小壁虎

LED 4-Head Gecko Beam Effect Light



技术参数

额定电压： AC100-240V，50/60Hz
额定功率： 200W灯珠 16 颗 10W CREE 四合一灯珠 165W 高亮金光频闪灯
1 颗 1Mw 红色激光器
1 颗 1Mw 绿色激光器
散热系统：对流传热,风冷,智能温控保护
透镜： 独特的清晰度和高浓度
频闪 每秒 0-20 次
工作模式 DMX512 信号/主从/自走/声控
控制模式：国际通用 DMX512 20CH
扫描速度：水平540°垂直360°无限旋转
产品重量：36*28*21CM （1PCS）
产品重量：4KG (1PCS)



Technical Parameters

Rated voltage: AC100-240V, 50/60Hz
Rated power: 200W
Lamp beads 16 pcs10W CREE 4-in-1 lamp beads
1pcs65W high brightness gold strobe
1pcs 1Mw red laser , 1 pcs1Mw green laser
Heat dissipation system: convection heat transfer, air cooling, intelligent temperature control protection Lens: unique clarity and high concentration
Strobe 0-20 times per second
Working mode DMX512 signal / master-slave / self-propelled / voice control
Control mode: international general DMX512 20CH
Scanning speed: horizontal 540o, vertical 360 degrees unlimited rotationProduct Weight: 36*28*21CM Product weight: 4KG



SF-LM013

LED6颗12W蜂眼+激光
LED 6x12W Bee Eye+Laser

技术参数


电压:AC100-240V 50/60Hz
灯珠:6颗*10W 红绿蓝白四合一灯珠
控制方式:DMX512，主从机，自走及声控
控制通道:11/14 DMX 通道
功率:100W
产品尺寸:226x268x155mm
包装尺寸:300x290x380mm
净重:4.0kg
毛重:5.5kg

Technical Parameters

Voltage :AC100-240V 50/60Hz
Led beads :6 *10W red, green, blue and white four-in-one led beads
Control mode :DMX512, master-slave, self-propelled and voice control
Control channel :11/14 DMX channel
Power :100W
Product size :226x268x155mm
Packaging size :300x290x380mm
Net weight :4.0kg
Gross weight :5.5kg





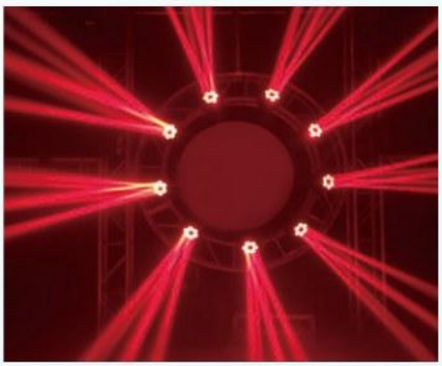

SF-LM014

LED60W图案灯+灯带
LED60W Pattern+ Light strip

技术参数

电压:AC110-220V，50-60HZ
功率:120W
光源:1颗60W 白光灯珠，
12颗RGB 0.2W灯珠
图案:8个图案
颜色:8种颜色
通道:10/14CH
控制模式:声控，主从，自走，DMX
X轴:5409
Y轴:270°
手动调焦

Technical Parameters

Voltage :AC110-220V, 50-60HZ
Power :120W
Light source :1 60W white light bead, 12 RGB 0.2W beads
Pattern :8 patterns
Colour :8 colours
Channel :10/14CH
Control mode: Voice control, master-slave, self-propelled, DMX
X-axis :5409
Y-axis :270°
Manual focusing







SF-LM015

LED30W图案灯+灯带
LED30W Pattern+Light Strip

技术参数

电压:AC90-240V，50-60HZ
功率:50W
光源:1颗30W 白光LED+12颗LED灯带
图案:7种图案+圆
颜色:7种颜色+白光
旋转角度:X轴540°，Y轴270°
运行模式:DMX512，声控，自走，主从
通道:10/12CH

Technical Parameters

Voltage :AC90-240V, 50-60HZ
Power :50W
Light source :1 pcs30W white LED +12 LED light strips
Pattern :7 patterns + circle
Color :7 colors + white light
Rotation Angle: 540° on the X-axis, 270° on the Y-axis
Operation mode :DMX512, voice-controlled, self-propelled, master-slave
Channel :10/12CH







SF-LM016

LED60W光束灯+灯带
LED60W BeamLight + Light Strip

技术参数

电源:AC100-240V 50/60Hz
总功率:100W
光源:1颗60W4In1+12颗LED灯带
控制模式:DMX512、主/从、声控
通道:10/13通道
水平扫描:540°(16位精确扫描)
垂直扫描:210°(16位精确扫描)
频闪:1-25次/秒或随机

Technical Parameters

Power supply :AC100-240V 50/60Hz
Total power :100W
Light source :1 60W 4-in-1 +12 LED light strips
Control mode :DMX512, master/Slave, Voice control
Channel :10/13 channel
Horizontal scan :540° (16-bit precise scan)
Vertical scanning :210° (16-bit precise scanning)
Stroboscopic effect :1-25 times per second or random







SF-A022

蜂眼六臂小金刚
Mini LED Bee Eye Spider Light with 6 Arms

技术参数
电压：AC95-245V
功率：150W
闪频：20次/秒
控制模式：DMX/主从/声控/自走
调光方式：0~100%超平滑调光
产品尺寸：30*30*18（CM）
净重：2.15KG
通用范围：酒吧/KTV/舞台/演出等

Technical Parameters
Voltage: AC95-245V
Power: 150W
Flash frequency: 20 times / sec
Control mode: DMX/master-slave/ sound control/self-propelled
Dimming mode: 0~100% ultra-smooth dimming
Product size: 30*30*18 (CM)
Net weight: 2.15KG
General scope: bar/KTV/stage/ performance, etc.








SF-A023

万花筒六臂金刚
LED 6-Arm Rotating Kaleidoscope Beam Effect Light

技术参数
产品功率：120W
频闪：20次/秒
工作电压：AC100-240V/50Hz
灯珠参数：6颗CREE 10W RGBW灯珠、1颗15W RGBW灯珠、100MW红色激光器、50MW绿色激光器、2颗10W白光频闪灯、2颗10W金光频闪灯
控制模式：国际通用 DMX512，24 通道
工作模式：DMX512、主/从、自走、声控
调光：0~100% 超平滑调光
产品尺寸：31x31x23CM
包装尺寸：72x51x37CM
产品净重：12.6 kg
包装总重：14.8 kg 4 合 1

Technical Parameters
Product power:120W Strobe:20 times/s
Operating voltage:AC100-240V/50Hz
Bead parameters:6 PCS CREE 10W RGBW beads, 1pcs 15W RGBW bead, 100 MW red laser, 50MW green laser, 2pcs 10W white light strobe, 2pcs 10W golden light
strobe Control mode:international general DMX512,24 channels
Working mode:DMX512, main/slave, self-walking, voice control
Dimming:0~100% super smooth dimming
Product size:31x31x23CM
Packing size:72x51x37CM
Product N.W.:12.6KG Packing G.W.:14.8KG 4in1

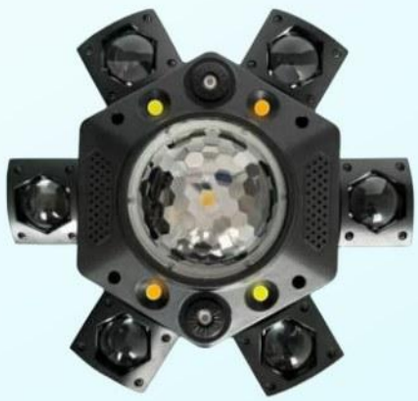





SF-A024

矩阵六臂小金刚

LED 6-Arm Matrix Beam Moving Head Light



技术参数

工作电压 AC95V-245V/50Hz
产品功率： 120W
灯珠参数： 6 颗 CREE 10W RGBW 灯珠、7 颗 100mW
红色激光器、7 颗 50mW 绿色激光器、
1 颗 80mW 蓝色激光器、
2 颗 10W 白光频闪灯珠、
2 颗 10W 黄色频闪灯珠
控制方式： 国际 UNIVERSALDMX512, 21 个通道
工作模式： DMX512 主/从机，自走，声控
调光方式:0~100%超平滑调光
频闪:每秒 20 次
产品包装尺寸： 34*27*34CM
毛重:4KG

Technical Parameters

Working voltage: AC95V-245V/50Hz
Product power: 120W
Lamp beads parameters: 6 CREE 10W RGBW lampbeads, 7 pcs100mW red lasers, 7 pcs50mW green lasers,
1pcs 80mWblue laser, 2 pcs10W white light strobe lamp beads,2pcs 10Wyellow strobeads
Control mode: international universa DMX512, 21 channels
Working mode: DMX512main/ slave machine, self-propelled, voice control Strobe: 20 times per second
Dimming method: 0~100% ultra-smooth dimming
Product packaging size: 34*27*34CM
Gross weight: 4KG





SF-A025

六合一效果灯

6-in-1 Effect Light

技术参数

电压:AC110-240V
产品尺寸:23.8*11.5*12.8（CM）
重量:1.25KG
功率:80W
功能介绍:声控 自动 遥控 DMX512
灯光光源:足瓦进口灯珠+激光光源
使用寿命:60000h-10000h
适用场地： 家庭ktv 酒吧 单车房 影音房 清吧 舞台等

Technical Parameters

Voltage:AC110-240V
Product size:23.8*11.5*12.8(CM)
Weight:1.25KG Power:80W
Function:Voice-activated automatic remote control DMX512
Light source: full-watt imported lamp beads + laser light source
Service life:60000h-10000h
Applicable venues: family ktv bar cycling room audio-visual room clear bar stage, etc







SF-A026

跑马蝴蝶灯

LED Butterfly Chase Effect Light

技术参数

功率:50W
效 果: 光束透镜折射效果
尺 寸:21.5X21.2X18.5CM(长宽高)
颜 色:红绿蓝白(可叠加混色)
净重: 1.35KG
控 制:声控、自走、主从、遥控、DMX512控制
光 源:进口四合一科瑞灯珠
适用场所: 酒吧、迪厅、酒店、演唱会、舞台表演等应用场所

Technical Parameters

Power: 50W
Effect: beam lens refraction effect
Size: 21.5X21.2X18.5CM
(length, width and height)
Color: red, green, blue and white
(can be stacked mixed colors)
Net weight: 1.35KG
Control: voice control, self-propelled, master-slave, remote control, DMX512 control
Light source: imported four in one Kerry lamp beads
Applicable places: bars, discos, hotels, concerts, stage performances and other applications







SF-A027

四合一红绿激光舞台灯

4-in-1 Red and Green Laser Stage Light


技术参数

功率:50W
效果: 光束透镜折射效果
尺寸:21.5X21.2X18.5CM(长宽高)
颜 色:红绿蓝白(可叠加混色)
净重: 1.35KG
控制:声控/自走/主从/遥控/DMX512控制
光源:进口四合一科瑞灯珠
适用场所: 酒吧、迪厅、酒店、演唱会、舞台表演等应用场所

Technical Parameters

Power: 50W
Net weight: 1.35KG
Effect: beam lens refraction effect
Size: 21.5X21.2X18.5CM
(length, width and height)
Color: red, green, blue and white
(can be stacked mixed colors)
Control: voice control, self-propelled, master-slave, remote control, DMX512 control
Light source: imported four in one Kerry lamp beads
Applicable places:
bars, discos, hotels, concerts, stage performances and other applications



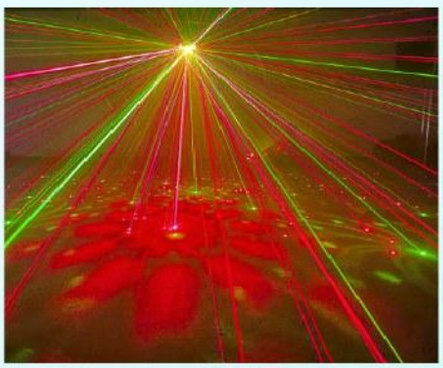



China2EU

帕灯系列

Par Light Series



SF-LP001

LED18/54颗RGBW防水帕灯
18/54Pcs RGBW Waterproof Par Light



技术参数

电压：AC100-240V 50/60Hz
功率：200W
光源：54pcs*3W（R12 G12 B12 W6）
光束角度：25°
运行模式：主从，自走，声控，DMX512
通道：8CH
防水等级：IP65
尺寸：320x320x340mm
净重：6.2kg
毛重：6.8kg

Technical Parameters

Voltage: AC100-240V 50/60Hz
Power: 200W
Light source: 54pcs*3W(R12 G12 B12 W6)
Beam angle: 25 °
Control mode: DMX512, Master-slave,Auto,Sound
Channel: 8CH
Waterproof Grade: IP65
size:320x320x340mm
Net weight: 6.2kg
Gross weight: 6.8kg

SF-LP002

LED18颗4合1防水调焦帕灯
LED18Pcs 4in1 Waterproof Zoom Par Light



技术参数

电压：AC100-240V 50/60Hz
功耗：200W
LED数量：18颗*10W 4合1 LED
光束角度：10° -60° 变焦角度
运行模式：主从，自走，声控，DMX512
控制通道：8/9/10CH
防水等级：IP65
尺寸：320x320x340mm
净重：9.8kg
毛重：11.5kg

Technical Parameters

Voltage: AC100-240V 50/60Hz
Power : 200W
Light source: 18pcs*10W 4in1 LED
Beam Angle: 10° -60° zoom angle
Control mode: DMX512,Master-slave, Sound, Auto
Channel: 8/9/10CH
Waterproof Grade: IP65
Size:320x320x340mm
N.W: 9.8kg
G.W: 11.5kg

SF-LP027

LED防水帕灯
LED Waterproof Par Light



技术参数

电压: AC100~240V 50/60Hz 功率: 180W
灯珠: 54颗3瓦，24颗8瓦，18颗10瓦，4颗50瓦
控制方式: DMX512/自走/主从/声控/带RDM功能
通道: CH09
调光: 32bit 0~100%线性调光
特点：染色(54颗，18颗，24颗)面光/爆闪(4颗50瓦)
工作温度: -30度~45度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式：DMX512输入输出 / 电源输入输出。
IP 等级: Ip65 净重：4KG（合金防水头款）
灯具尺寸：31×24×24CM

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 180W
Led beads: 54 pcs3-watt beads, 24 pcs8-watt beads, 18 pcs10-watt beads, 4 pcs50-watt beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
Channel: Ch09 Dimming: 32-bit 0~100% linear dimming
Features: Dyeing (54 pieces, 18 pieces, 24 pieces), surface gloss, flash (4 pieces, 50 watts)
Operating temperature: -30 degrees to 45 degrees
Stroboscopic frequency: 1 to 30HZ
Appearance: Metallic, black
Connection method: DMX512 input/output/ power input/output. IP rating: IP65
Net weight 4KG (alloy waterproof head model)
Lamp size: 31×24×24 cm

SF-LP028

LED4眼防水帕灯
LED 4-eyeWaterproof Par Light



技术参数

输入电压:AC100-240V, 50-60Hz
额定功率:200W LED光源:4*50N 二合一
颜色:均匀的RCBW，换色速度:0-20Hz
灯珠寿命:平均50000小时超长LED寿命
通道数量:4/8个DK通道
控制模式:国际标准DVK512信号、自走、主从
光束角度:25°/40
高速频闪:独立电子频闪，1-25Hz
线性调光:0-100%线性调光
产品外观:高强皮压铸铝合金，流线型外观设计
防水等级:IP65
工作环境:室内-20℃-50℃

Technical Parameters

Input voltage :AC100-240V, 50-60Hz
Rated power :200W LED light source :4*50N 2-in-1
Color: Uniform RCBW, color change rate :0-20Hz
The lifespan of the LED beads: An average of 50,000 hours of ultra-long LED lifespan
Number of channels :4/8 DK channels
Control mode: International standard DVK512 signal, self-driving, master-slave Beam Angle :25°/40
High-speed stroboscopic effect: Independent electronic stroboscopic effect, 1-25Hz
Linear dimming :0-100% linear dimming
Product appearance: High-strength leather die-cast aluminum alloy, streamlined appearance design
Waterproof rating :IP65
Working environment: Indoor -20℃ to 50℃

SF-LP005

LED54颗RGBW/3合1帕灯
LED54pcs RGBW/3in 1 Par Light



技术参数

电压：AC100-240V 50/60Hz
功率：200W
光源：54颗*6W 三合一LED灯珠
控制模式：声控、自动、主从、DMX512
通道：7CH
光束角度：15°，25°，35°，45° 可选
额定寿命：6万-10万小时
尺寸：230x230x360mm
净重：2.7kg
毛重：3.5kg

Technical Parameters

Voltage: AC100-240V 50/60Hz
Power: 200W
Lamp power: 54pcs*6W 3in1 LED
Operation mode: Auto,DMX512,Master-slave,Sound
Channels：7CH
Beam Angle:15° ,25° ,35° ,45° for selectable
Rated life :60,000-100,000 hours
size: 230x230x360mm
N.W: 2.7kg
G.W: 3.5kg

SF-LP006

LED18颗4/5/6合1帕灯
LED18pcs 4/5/6in1 ParLight



技术参数

电压：AC100-240V 50/60Hz
功率：200W
光源：18颗*10W/15W/18W 4合1，5合1，6合1，LED
通道：8/9/10CH
尺寸：230x230x360mm
包装尺寸：800x540x390mm（6包）
体重：2.7kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Power: 200W
Light source: 18pcs*10W/15W/18W 4in1/5in 1/6in 1/LED
channels:8/9/10CH
Packing size: 230x230x360mm
Packing size: 800x540x390mm (6 Pack)
Weight: 2.7kg

SF-LP007

LED18颗4合1调焦帕灯
LED18pcs 4 in 1 Zoom Par Light



技术参数

输入电压：AC100-240V 50/60Hz
功率：200W
光源：18颗*10W/15W/18W 4/5/6in1 LED
光束角度：10° -60° 变焦角度
控制模式：DMX512，声控，自动，主从
控制通道：8/9/10CH
防水等级：IP20
包装尺寸：230x230x360mm
包装尺寸：800x540x390mm(6pc/CTN)
净重：2.7kg 毛重：3.5kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Power: 200W
Light source: 18pcs*10W/15W/18W 4/5/6in1 LED
Beam Angle: 10° -60° zoom angle
Control mode: DMX512,Master-slave,Sound, Auto
Channel: 8/9/10CH
Waterproof Grade: Ip20
Packing Size:230x230x360mm
Packing Size:800x540x390mm(6pc/CTN)
N.W: 2.7kg G.W: 3.5kg

SF-LP008

LED18颗4/5/6合1帕灯
LED18Pcs 4/5/6in1 Par Light



技术参数

电压：AC100-240V 50/60Hz
功率：200W
灯珠数量：18颗*18W 6in1 LED灯珠
控制信号：DMX512,主从机,声控，自走程序
控制通道：10CH
光束角度：35°，45° 可选
额定寿命：6万-10万小时
防护等级：IP20
包装尺寸：235x235x360mm
包装尺寸:800x540x390mm(6pc/CTN)
净重：3.9KG 毛重：4.5KG

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Power:200W
LEDS: LED 18pcs *18W 6in1
Control mode: DMX512,Master-slave,Sound, Auto
Channel: 10CH
Beam Angle:35° ,45° for selectable
Rated life :60,000-100,000 hours
Waterproof Grade: Ip20
Packing Size:235x235x360mm
Packing Size：800x540x390mm(6pc/CTN)
N.W: 3.9kg G.W: 4.5kg

SF-LP009

LED四眼观众帕灯
LED 4-Eye Audience Blinder PAR Light



技术参数

输入电压: AC100-240V 50/60Hz
总功率: 200W
光源: 4颗*50W COB (冷暖白二合一)
透镜角度：40°
投射距离：50米
控制模式：声控,自走,DMX512,主从
通道：8CH
尺寸: 230x230x350mm
净重: 3.5kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Power: 200W
Light source option : 4pcs*50W COB
Lens: 40 degree
Projection distance: 50 meters
Control mode: Sound,Auto,DMX512, Master-slave
Channel: 8CH
Size: 230x230x350mm
Weight: 3.5kg

SF-LP010

LED200WCOB帕灯
LED 200W COB PAR Light



技术参数

电压：AC100-240V 50/60Hz
功率：200W
光源：1pcs*200W COB
颜色：暖白色，白色
调光：0-100%
控制模式：声控，主从,自走,DMX512
通道：2CH
工作温度：-30℃-40℃
尺寸：320x320x360mm
重量：3.5kg

Technical Parameters

Input Voltage: AC100-240V, 50/60Hz
Power: 200W
Light source: 1pcs*200W COB
Color: warm white, white
Dimming: 0-100%
Control mode:Sound,Master-slave,Auto,DMX512
Channels: 2CH
Working temperature: -30 ℃ -40 ℃
Size: 320x320x360mm
Weight: 3.5kg

SF-LP011

LED四眼观众灯
LED Four-Eye Audience Light



技术参数

输入电压：AC100-240V 50/60Hz
功率：400W
光源：4颗*100W COB
颜色：暖白/正白/双色温
调光：0-100%
控制模式：声控，主从，自走，DMX512
通道：4/8CH
工作温度：-30℃-40℃
尺寸：600x500x300mm
重量：7kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Power: 400W
Light source: 4pcs*100W COB
Color: warm white/ white/Two colors
Dimming: 0-100%
Control mode: Sound,Master-slave,Auto,DMX512
Channels: 4/8CH
Working temperature: -30 ℃ -40 ℃
Size: 600x500x300mm
Weight: 7kg

SF-LP012

LED防水3颗20W帕灯
LED Waterproof 3Pcs20w par Light



技术参数

电压:100-240V 50/60HZ
运行模式:
DMX512,主从/自走/声控
功率:60W
防护等级:IP65
光源:3*20W RGBWA+UV 6合1 LED
尺寸:17.5*11*17.5CM
净量:1.5KG

Technical Parameters

Voltage :100-240V 50/60HZ
Operation mode:
DMX512, master-slave/
self-walking/voice control
Power :60W
Protection class :IP65
Light source :3*20W
RGBWA+UV 6 in 1 LED
Size :17.5*11*17.5CM
Net weight :1.5KG

SF-LP013

LED防水6颗10W帕灯
LED Waterproof 6Pcsl0w par Light



技术参数

电压:100-240V 50/60HZ
运行模式:
DMX512,主从/自走/声控
功率:60W
防护等级:IP65
光源:6*10W RGBWA+UV 6合1 LED
尺寸:25*20*23CM
净量:4KG

Technical Parameters

Voltage :100-240V 50/60HZ
Operation mode:
DMX512, master-slave/
self-walking/voice control
Power :60W
Protection class :IP65
Light source :6*10W
RGBWA+UV 6 in 1 LED
Size :25*20*23CM
Net weight :4KG

SF-LP014

LED100WCOB面光灯
LED 100W COB Wash Light



技术参数

输入电压：AC100-240V 50/60Hz
光源：1pcs*100/200W COB LED
显色指数：≥93% 色温：暖白色（3200K）
通道：2CH
调光器：0-100%线性调光器
频闪效果：变速（1-30Hz）
控制模式：DMX512,主/从,声控,自动
额定功率：250W
包装尺寸：230x230x360mm
净重：2.5kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Lamp: 1pcs*100/200W COB LED
Color Rendering Index: ≥93%
Color Temperature: warm white (3200K)
Channel: 2CH
Dimmer: 0-100% linear dimmer
Strobe Effect:variable speed (1-30Hz)
Control Mode:DMX512,Master-slave,Sound,Auto
Rated Power: 250W
Packing size:230x230x360mm
N.W: 2.5kg

SF-LP015

LED200WCOB面光灯
LED 200W COB Wash Light



技术参数

输入电压：AC100-240V 50/60Hz
灯泡：1pcs*200W COB LED
显色指数：≥93% 色温：暖白色（3200K）
通道：2CH
调光器：0-100%线性调光器
频闪效果：变速（1-30Hz）
控制模式：DMX512,主从,声控，自动
额定功率：250W
包装尺寸：630x430x380mm
净重：5kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Lamp: 1pcs*200W COB LED
Color Rendering Index: ≥93%
Color Temperature: warm white (3200K)
Channel: 2CH
Dimmer: 0-100% linear dimmer
Strobe Effect: variable speed (1-30Hz)
Control Mode: DMX512,Master-slave,Sound,Auto
Rated Power: 250W
Packing size: 630x430x380mm
N.W: 5kg

SF-LP016

LED两眼观众灯
LED Two-Eye Audience Light



技术参数

输入电压：AC100-240V 50/60Hz
功率：200W
LED数量：2pcs* 100W 白色，暖白色，纯白+暖白色LED
控制通道：4/8CH
净重：4.8kg
毛重：5.5kg
包装尺寸：255x255x365mm

Technical Parameters

Input Voltage:AC100-240V 50/60Hz
Power: 200W
Light source: 2pcs*100W(white,warm white, pure white+warm white)
Control Channel: 4/8CH
NW: 4.8kg
GW: 5.5kg
Packing Size:255x255x365mm

SF-LP017

LED四眼防水观众灯
LED Four-Eye Waterproof Audience Light



技术参数

输入电压：AC100-240V 50/60Hz
光源：4pcs*100W COB
显色指数≥93%
色温：暖白（3200K色温）
通道：4/8CH
操作模式：DMX512,主从,自动,声控
防水等级：IP65
包装尺寸：450x450x330mm
净重：18kg

Technical Parameters

Input Voltage: AC100-240V 50/60Hz
Light source: 4pcs*100W COB
Color rendering index ≥ 93%
Color temperature: warm white (3200K color temperature)
Channel: 4/8CH
Control model: DMX512,Sound,Auto,Master-slave
Waterproof Grade: Ip65
Packing size: 450x450x330mm
N.W:18kg

SF-LP018
300W防水调焦面光灯
300W Waterproof Zoom Wash Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功 率：300w
光 源：300wcob集成灯珠
色温：3200k/5600k
发光角度：10-50度线性放大
控制模式：DMX控制/主从/声控
通道：6/8CH通道
外 壳：铸铝
包装尺寸：28*28*45cm
净 重：10kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power: 300w
Light source: 300wcob integrated lamp beads
Color temperature: 3200k/5600k
Light-emitting angle: 10-60 degrees linear amplification
Control mode: DMX control / master-slave / voice control
Channel: 6/8CH channel
Case: cast aluminum
Package size: 28*28*45cm
Net weight: 10kg

SF-LP019
7*40W防水调焦染色灯
7×40W Waterproof Zoom Color Wash Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
电源功率：350w 光 源：7*40W四合一灯珠
发光角度：10-50度线性放大
控制模式：DMX控制/主从/声控
通道：5/9CH通道 光学系统：高精密光学组件
显色指数：可定制显色指数≤98
发光角度：10-50度线性放大
调焦系统：采用高精度步进马达
调 光：电动线性0—100% 外 壳：铸铝
散 热：机身自然散热加智能静音风机辅助散热
工作温度：-25℃-45℃ 包装尺寸：46*30*27cm
外箱尺寸：48*32*57cm（一装二）净 重：7.7kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power supply power: 350w
Light source: 7 * 40W four-in-one lamp beads
Light-emitting angle: 10-60 degrees linear amplification
Control mode: DMX control / master-slave / voice control
Channel: 6/9CH channel
Optical system: high-precision optical components
Color rendering index: customizable color rendering index ≤ 98
Light-emitting angle: 10-60 degrees linear amplification
Focusing system: using high-precision stepper motor
Dimming: Electric linear 0-100% Shell: cast aluminum
Heat dissipation: natural body heat dissipation plus intelligent mute fan assisted heat dissipation
Working Temperature: -25℃-45 Package size: 46*30*27cm
Outer box size: 48*32*57cm (one loaded two) Net weight: 7.7kg

SF-LP020
300W防雨调焦面光灯
300W IP65 Zoom LED Fresnel Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功 率：300w
光 源：300w高亮cob集成灯珠
电 机：高精度步进电机
色 温：3200k/5600k或双色可选
透 镜：高精密聚光透镜组
发光角度：10-60度线性放大
控制模式：DMX控制/主从/声控
通道：10CH通道
驱动形式：恒流驱动
外 壳：铁
包装尺寸：30*26*45cm 净 重：8kg

Technical Parameters

Input Voltage:AC90-240V 50HZ/60HZ Power: 300w
Light source: 300w high brightness cob integrated lamp beads
Motor: high-precision stepping motor
Color temperature: 3200k/5600k or dual-color optional
Lens: high-precision spotlight lens group
Light-emitting angle: 10-60 degrees linear amplification
Control mode: DMX control / master-slave / voice control
Channel: 10CH channel
Driving form: constant current drive Case: Iron
Package size: 30*26*45cm
Net weight: 8kg

SF-LP021
200W调焦面光灯
200W Dimmable Face Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功 率：200w 光源：进口200wcob集成灯珠
色温：3200k-5600k
光学系统：高精密光学组件
显色指数：可定制显色指数≤98
发光角度：10-60度线性放大
调焦系统：采用同步齿传动方式
调光：电动线性0—100%
控制模式：DMX控制/主从/声控通道：6/8CH通道
散热：内置集成高效散热片加智能静音风机辅助散热
包装尺寸：46*30*27cm
外箱尺寸：48*32*57cm（一装二）净 重：5.8kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power: 200w Color temperature: 3200k-5600k
Light source: imported 200wcob integrated lamp beads
Optical system: high-precision optical components
Color rendering index: can be customized color rendering index ≤ 98
Light-emitting angle: 10-60 degrees linear amplification
Focusing system: synchronized tooth drive
Dimming: electric linear 0-100% Channel: 6/8CH channel
Control mode: DMX control / master-slave / voice control
Heat dissipation: Built-in integrated high-efficiency heat sink and intelligent mute fan to assist heat dissipation
Package Size: 46*30*27cm
Outer box size: 48*32*57cm (one loaded two)Net weight: 5.8kg

SF-LP029
LED迷你聚光灯
Compact LED Mini Spotlight



技术参数

输入电压：AC90-240V 50HZ/60HZ
电源功率：150w
光 源：100w高亮cob集成灯珠
色 温：3200k/5600k/双色或彩色可选
透 镜：高精密聚光透镜组发光
角 度：10-60度线性放大
控制模式：DMX控制/主从/声控
通道：6/8/10CH通道
外 壳：铝型材
内包尺寸：35*21*17cm(一装一) 重量：3.7KG
外包尺寸：44*36*55cm(一装六) 重量：23.4KG

Technical Parameters

Input Voltage: AC 90–240 V, 50 Hz/60 Hz Power Consumption: 150 W
Light Source: 100 W high-brightness COB integrated LED chips
Color Temperature: 3200 K/5600 K; dual-color or full-color options available Lens: High-precision spot lens assembly
Beam Angle: 10–60° with linear adjustment
Control Modes: DMX control / Master-Slave / Sound control
Channels: 6/8/10 channels Housing: Aluminum extrusion
Inner Packaging Dimensions: 35 × 21 × 17 cm (1 unit per box)
Weight: 3.7 kg
Outer Packaging Dimensions: 44 × 36 × 55 cm (6 units per box)
Weight: 23.4 kg

SF-LP022
200W调焦面光灯
200W Zoom Wash Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功率：200w 色温：3200k-5600k
光源：进口200wcob集成灯珠
光学系统：高精密光学组件
显色指数：可定制显色指数≤98
发光角度：10-60度线性放大
调焦系统：采用同步齿传动方式
调光：电动线性0—100%
控制模式：DMX控制/主从/声控
通道：6/8CH通道 外壳：铝型材
散热：内置集成高效散热片加智能静音风机辅助散热
包装尺寸：28*28*45cm 净 重：5.8kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power: 200w Color temperature: 3200k-5600k
Light source: imported 200wcob integrated lamp beads
Optical system: high-precision optical components
Color rendering index: can be customized color rendering index ≤ 98
Light-emitting angle: 10-60 degrees linear amplification
Focusing system: synchronized tooth drive
Dimming: electric linear 0-100%
Control mode: DMX control / master-slave / voice control
Channel: 6/8CH channel Package Size: 28*28*45cm
Heat dissipation: Built-in integrated high-efficiency heat sink and intelligent mute fan to assist heat dissipation
Case: Aluminum profile Net weight: 5.8kg

SF-LP023
300W调焦面光灯
300W Zoom Wash Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功率：200w 色温：3200k-5600k
光源：进口200wcob集成灯珠
光学系统：高精密光学组件
显色指数：可定制显色指数≤98
发光角度：10-60度线性放大
调焦系统：采用高精度步进马达
调光：电动线性0—100%
控制模式：DMX控制/主从/声控
通道：6/8CH通道外壳：铝型材
散热：内置集成高效散热片加智能静音风机辅助散热
包装尺寸：28*28*45cm 净 重：5.8kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power: 200w Color temperature: 3200k-5600k
Light source: imported 200wcob integrated lamp beads
Optical system: high-precision optical components
Color rendering index: can be customized color rendering index ≤ 98
Light-emitting angle: 10-60 degrees linear amplification
Focusing system: using high-precision stepping motor
Dimming: electric linear 0-100%
Control mode: DMX control / master-slave / voice control
Channel: 6/8CH channel Package Size: 28*28*45cm
Heat dissipation: Built-in integrated high-efficiency heat sink and intelligent mute fan to assist heat dissipation
Case: Aluminum profile Net weight: 5.8kg

SF-LP024
防水调焦面光灯
Waterproof Zoom Wash Light



技术参数

输入电压：AC90-240V 50HZ/60HZ
功率：200w 色温：3200k-5600k
光源：进口200wcob集成灯珠
光学系统：高精密光学组件
显色指数：可定制显色指数≤98
发光角度：10-60度线性放大
调焦系统：采用高精度步进马达
调光：电动线性0—100%
控制模式：DMX控制/主从/声控
通道：6/8CH通道外壳：压铸铝
散热：机身自然散热加智能静音风机辅助散热
包装尺寸：28*28*45cm 净 重：5.8kg

Technical Parameters

Input voltage: AC90-240V 50HZ/60HZ
Power: 200w color temperature: 3200k-5600k
Light source: imported 200wcob integrated lamp beads
Optical system: high-precision optical components
Color rendering index: customizable color rendering index ≤ 98
Light-emitting angle: 10-60 degrees linear amplification
Focusing system: using high-precision stepping motor
Dimming: electric linear 0-100%
Control mode: DMX control / master-slave / voice control
Channel: 6/8CH channel Shell: die-casting aluminum
Heat dissipation: natural body heat dissipation plus intelligent mute fan assisted heat dissipation
Package size: 28*28*45cm Net weight: 5.8kg

SF-LP025
6颗（桶装）电池帕灯
6×Battery-Powered PAR Light



技术参数

产品材质:铝合金
电压:AC110V-250V，50-60HZ
灯珠寿命:3万小时-5万小时
无线:24G内置无线接收器
包装尺寸:257*160*270MM
型号:4*18W六合一帕灯
产品颜色:白色/黑色可选择
灯珠:4颗18W六合一LED灯珠
DMX通道:6/6CH
无线:24G内置无线接收器
净/毛重:2.5kg/2.6kg
控制:手机、无线DMX512,有线DMX512,自主:自走
电池工作时间:全亮四小时，自走八小时，单色10小时

Technical Parameters

Product Material:Aluminum Alloy
Voltage:AC 110V-250V,50-60HZ Bead life: 30,000 hours - 50,000 hours
Wireless: 24G built-in wireless receiver
Package Size:257*160*270MM Model:4*18W 6-in-1 Palm light
Product color: white / black optional
Lamp beads:4pcs 18W six-in-one LED lamp beads
DMX Channel:6/6CH Wireless:24G built-in wireless receiver
Net/Gross Weight:2.5kg/2.6kg
Control:Cell Phone,Wireless DMX512,Wired DMX512,
Autonomous:Self-propelled
Battery operating time: fulllight four hours, self-propelled eight hours, single-color 10 hours

SF-LP026
12颗18W电池帕灯
12pcs 18W Battery Par Light



技术参数

电压：AC110V-240V 50-60HZ
光源：12pcs*18W高亮度6合1LED
灯珠寿命：6-10万小时
控制通道：6/10CH
透镜角度：25度
控制模式：DMX512,摇控,WIF1,主从,自走,声控
锂电池容量：13200毫安
控制面板：LCD显示板
产品尺寸：240*130*250mm
重量：3.5KG

Technical Parameters

Voltage: AC110V-240V 50-60HZ
Light source: 12pcs*18W high brightness 6-in-1 LEDs
Lamp bead life: 6-10 million hours
Control channel: 6/10CH
Lens angle: 25 degrees
Control modes: DMX512, shaking control, Self-propelled, voice-activated
Lithium battery capacity: 13200 mAh
Control panel: LCD display board
Product size: 240*130*250mm
Weight: 3.5KG

China2EU

激光灯系列

Laser Light Series



SF-LS001

8眼激光+LED8眼光束
8 Eyes Laser+8 Eyes Led Beam





技术参数

电源：AC110 –220V，50 / 60Hz
控制模式：DMX512，声控，自走
功率：120W
光源：8*300MW红激光+8*5W LED
通道：8/22通道
步进电机
电机扫描角度：±25°

Technical Parameters

Power supply: AC110– 220V, 50 / 60Hz
Control mode: DMX512, voice control, self–propelled
Power: 120W
Light source: 8*300MW red laser + 8*5W LED
Channel: 8/22 channel
Stepper motor
Motor scanning angle: ±25°

SF-LS002

8眼激光（R/G/B/RGB)
8 Eyes Laser Light(R/G/B/RGB)





技术参数

额定电压：AC110V～ 230V ±10%，50Hz～60Hz
额定功率：120W
激光功率：单红500MW*8
激光图案：多种粗光束效果
控制方式：DMX–512信号控制、自走、声控
控制通道：6/14 CH 个512通道
激光光源：R红光500mw/638nm
扫描角度：±25°
内箱尺寸：110*14*21 cm
净重：9.5 KG
毛重：12KG

Technical Parameters

Rated voltage: AC110V～230V ±10%, 50Hz～60Hz
Rated power: 120W
Laser power: single red 500MW*8
Laser pattern: a variety of coarse beam effects
Control mode: DMX–512 signal control, self–propelled, voice control
Control channel: 6/14 CH 512 channels
Laser light source: R red light 500mw/638nm
Scanning angle: ±25°
Inner box size: 110*14*21 cm
Net weight: 9.5 KG
Gross weight: 12KG

SF-LS003

6眼全彩激光（单头全彩）
6 Eyes Full ColorLaser Light
(Single Head Full Color)





技术参数

电压：AC100–240V 50，60Hz
额定功率： ＜180W
光源功率：
500mw*6头（红100mw，B150mw，G150mw)
1000mw*6头(红200mw，B500mw，G:300mw)
1000mw6头(红200mw，B500mw，G:300mw)
旋转角度：Y旋转240° X轴放转120°
控制功能：声控/自动/ DMX512（11/26/ 38CH）
产品尺寸：86*14*22cm
净重：14kg

Technical Parameters

Voltage: AC100–240V 50, 60Hz
Rated power: <180W
Power source:
500mw*6 heads (red 100mw, B150mw, G150mw)
1000mw*6 heads (red 200mw, B500mw, G: 300mw)
1000mw 6 heads (red 200mw, B500mw, G: 300mw)
Rotation angle: Y rotate 240°
and X axis rotate 120°
Control function: Voice control/auto/DMX512 (11/26/ 38CH)
Product size: 86*14*22cm
Net weight: 14kg

SF-LS004

6眼激光（R/G/B/RGB)
6 Eyes LaserLight (R/G/B/RGB)





技术参数

电压：AC100V –240V 50 / 60Hz
功率：150W
激光颜色：红色
激光功率：1.8W（6pc * 300MW / 638nm）
控制方式：DMX512，自动，声音，主从
频道：9 / 24CH
移动角度：X：0–270° Y：0–180°
扫描系统：步进电机
电机扫描角度：±25°
包装尺寸：95 * 19 * 30CM（一件）
净重：11.55kg

Technical Parameters

Voltage: AC100V –240V 50/60Hz
Power: 150W
Laser color :RED
Laser power: 1.8W (6pc*300MW /638nm)
control mode:dmx–512,Auto,Sound,Master–slave
Channel: 9/24CH
Moving angle: X:0–270° Y :0–180°
Scan system:Stepper motor
motor scan angle: ±25°
Packing size:95*19*30CM (one piece)
N.W:11.55kg

SF-LS005

700MW动画激光
700mW Animatian Laser Light





技术参数

电源： AC100–240V，50/60Hz
激光功率：700MW
光源：激光发射器
冷却系统：风机强制冷却系统
机箱材质：全铝机箱
控制方式：DMX512/声控/主从/自走
灯体尺寸：210×210×60mm
净重：1.6kg
毛重：3.6kg

Technical Parameters

Power supply: AC100–240V, 50/60Hz
Laser power: 700MW
Light source: Laser transmitter
Cooling system: Fan forced cooling system
Case material: All aluminum case
Control mode: DMX512/Vocin contial/ Master-siaver mode/Auto-Run
Light body size: 210×210×60mm
Net weight: 1.6kg
Gross weight: 3.6kg

SF-LS009

1W全彩动画激光
1W Full Color Animatian Laser Light





技术参数

电源： AC100–240V，50/60Hz
激光功率：1W
颜色：RGB多色激光
光源：激光发射器
冷却系统：风机强制冷却系统
机箱材质：全铝机箱
控制方式：DMX512/声控/主从/自走
灯体尺寸：210×210×60mm
净重：1.6kg
毛重：3.6kg

Technical Parameters

Power supply: AC100–240V, 50/60Hz
Laser power: 1W
Color: RGB multi–color laser
Light source : Laser transmitter
Cooling system : Fan forced cooling system
Case material : All aluminum case
Control mode: DMX512/Vocin contial/ Master-siaver mode/Auto-Run
Light body size: 210×210×60mm
Net weight: 1.6kg Gross weight: 3.6kg

SF-LS007

500MW-1W8合1动画激光
500mW-1W 8in1 Animation Laser Light





技术参数

电压：AC 100V-240V，50Hz / 60Hz
额定功率：100W
光源：半导体激光发生器
激光功率：500mW　颜色：RGB多色激光
DMX通道：12CH
控制模式：DMX512，自走，声控，主从
模式：128光束和图形模式+全彩动画5D图案
扫描仪：15kpps　扫描角度：±20°
工作环境：室内（10~35℃）
尺寸：360x290x185mm
毛重：4.0kgs

Technical Parameters

Voltage: AC 100V-240V, 50Hz / 60Hz
Rated power: 100W
Light source: semiconductor laser generator
Laser power: 500mW Color: RGB multi-color laser
DMX channel: 12CH
Control mode: DMX512, self-propelled, voice control, master-slave
Mode: 128 beams and graphics mode + full-color animation 5D pattern
Scanner: 15kpps Scanning angle: ±20°
Working environment: indoor (10~35℃)
Size: 360x290x185mm
Gross weight: 4.0kgs

SF-LS010

1W全彩激光
1W Full Color Laser Light





技术参数

电源： AC100-240V, 50/60Hz
激光功率：1W
颜色：RGB多色激光
光源：激光发射器
冷却系统：风机强制冷却系统
机箱材质：全铝机箱
控制方式：DMX512/声控/主从/自走
灯体尺寸：210×210×60mm
净重：1.6kg
毛重：3.6kg

Technical Parameters

Power supply :AC100-240V, 50/60Hz
Laser power :1W
Color :RGB multi-color laser
Light source: Laser emitter
Cooling system: Fan forced cooling system
Case material: All-aluminum case
Control mode :DMX512/ Voice control/ master-slave/self-drive
Lamp body size :210x210x60mm
Net weight :1.6kg
Gross weight :3.6kg

SF-LS011

1-3W蓝牙全彩激光
1-3W Bluetooth Full Color Laser Light





技术参数

电压：AC90－240V，50－60H
功率：30W
光源：3W 4W 5W全彩激光
激光波长：红500MW/638nm，绿500MW/520nm，蓝1000MW/445nm
扫描系统：20K 振镜
光学扫描角度：±20°
控制模式：DMX512/主从/声控/自动
通道模式：6CH/34CH
产品尺寸：24*20*31cm
净重：4KG

Technical Parameters

Voltage: AC90-240V, 50-60H
Power: 30W
Light source: 3W 4W 5W full color laser
Laser wavelength: red 500MW/638nm, green 500MW/520nm,
Blue 1000MW/445nm
Scanning system: 20K galvanometer
Optical scanning angle: ±20°
Control mode: DMX512/ master-slave/voice control/auto
Channel mode: 6CH/34CH
Product size: 24*20*31cm
Net weight: 4KG

SF-LS012

1-3W全彩激光
1-3W Full Color Laser Light





技术参数

电压：AC90－240V，50－60H
功率：30W
光源：3W 4W 5W全彩激光
激光波长：红500MW/638nm，绿500MW/520nm，蓝1000MW/445nm
扫描系统：20K 振镜
光学扫描角度：±20°
控制模式：DMX512/主从/声控/自动
通道模式：6CH/34CH
产品尺寸：24*20*31cm
净重：4KG

Technical Parameters

Voltage: AC90-240V, 50-60H
Power: 30W
Light source: 3W 4W 5W full color laser
Laser wavelength: red 500MW/638nm, green 500MW/520nm,
Blue 1000MW/445nm
Scanning system: 20K galvanometer
Optical scanning angle: ±20°
Control mode: DMX512/ master-slave/voice control/auto
Channel mode: 6CH/34CH
Product size: 24*20*31cm
Net weight: 4KG

SF-LS013

5W全彩激光
5W Full Color Laser Light





技术参数

电源：AC90-250V，50/60Hz
总功率：150W
激光器功率：2000mw
激光器：半导体泵浦全固态激光器/半导体激光器
激光安全系数：4级
激光器功率/波长：红光1W/638nm，绿光1W/520nm，蓝光3W/445nm
扫描系统：ILDA 25Kpps-30Kpps高速扫描振镜
光学扫描角度：±30°
控制模式：声控/自动/主从控制/DMX512/电脑
DMX通道数：12
尺寸：310*310*280mm

Technical Parameters

Power supply: AC90-250V, 50/60Hz
Total power: 150W
Laser power: 2000mw
Laser: Diode pumped all solid-state laser/semiconductor laser
Laser safety factor: Level 4
Laser power/wavelength: red light 1W/638nm, green light 1W/520nm,
Blue light 3W/445nm
Scanning system: ILDA 25Kpps-30Kpps high-speed scanning galvanometer
Optical scanning angle: ±30°
Control mode: voice control/automatic/master-slave control/DMX512/computer
Number of DMX channels: 12
Size: 310*310*280mm

SF-LS014

5W摇头全彩动画激光
5W Moving-Head Full-Color Animation Laser





技术参数

电源:AC100-240V 50/60HZ
激光功率:5W
(红光:1500mw/绿光:1500mw/蓝光:2000mw)
光源:78颗RGB三合-SMD灯珠
运行模式:DMX512,主从,自走，声控
功率:80W
尺寸:22.5*21*36CM净量:6.3KG

Technical Parameters

Power supply:AC100-240V 50/60HZ
Laser power :5W
(Red light :1500mw/ Green light : 1500mw/ Blue light :2000mw)
Light source :
78 RGB triad -SMD lamp beads
Operation mode :DMX512, master-slave, self-walk, voice control
Power :80W
Size :22.5*21*36CM
Net weight :6.3KG

SF-LS015

10W全彩激光
10WFull Color Laser Light





技术参数

电源：AC90-250V，50/60HZ
总功率：150w激光功率：10W
激光器：半导体泵浦固体激光器；
半导体激光器激光
安全系数：4级
激光功率/波长：红光4W/638nm，
绿光2W/520nm，蓝光4w/445nm
扫描系统：ILDA25Kpps-30Kpps高速扫描
控制方式：声控/自动/主从控
DMX512 /台系列
通道数量：12个重量：6.3kg

Technical Parameters

Power supply: AC90-250V, 50/60HZ
Total power: 150w
Laser power: 10W
Laser: Semiconductor-pumped
solid-state laser Semiconductor laser
Laser safety factor: Level 4
Laser power/wavelength:
Red light 4W/638nm, green light 2W/520nm,
Blue light 4w/445nm
Scanning system: ILDA25Kpps-30Kpps
high-speed scanning
Control mode: Voice control/automatic/
master-slave control DMX512 per unit series
Number of channels: 12 Weight: 6.3kg

SF-LS010IP

10W防水动画激光
10W Waterproof Animation Laser





技术参数

光源:红120mw蓝300mw绿80mw
颜色:RGB(红绿蓝)全彩激光
电压:12V/220V
控制:声控/自走/DMX512
扫描方式:高速振镜扫描方式
产品重量:2.5KG

Technical Parameters

Light source: Red 120mw, blue 300mw,
green 80mw
Color :RGB(red, green, blue)
full-color laser
Voltage :12V/220V
Control: Voice control/
self-propelled /DMX512
Scanning method:
High-speed galvanometer
scanning method
Product weight :2.5KG

SF-LS032IP

20W防水动画激光
20W Waterproof Animation Laser Light





技术参数

电压:90V-270V
总功率:200W
控制模式:自动/声控/DMX512/PC
转 角 摸 式:振 镜
光点距离:150
激光输出功率(W):30W绿光8W
红光:10W，蓝光:12W
功率稳定性:5%
激光输出波长(NM):G532/R650/B450
本机总重量(KG):21.15

Technical Parameters

Voltage :90V-270V Total power :200W
Control mode: Automatic/
Voice control /DMX512/PC
Rotating Angle mode: galvanometer
Light spot distance :150
Laser output power (W):
30W for green light, 8W
Red light :10W, Blue light :12W
Power stability :5% N.W(KG):21.15

SF-LS032

15W全彩激光
15WFull Color Laser Light



技术参数

电源：AC90-250V，50/60HZ
总功率：150w激光功率：15W
激光器：半导体泵浦固体激光器；
半导体激光器激光 安全系数：4级
激光功率/波长：红光4W/638nm，
绿光2W/520nm，蓝光4w/445nm
扫描系统：ILDA25Kpps-30Kpps高速扫描
控制方式：声控/自动/主从控
DMX512 /台系列 通道数量：12个重量：6.3kg

Technical Parameters

Power supply: AC90-250V, 50/60HZ
Total power: 150w Laser power: 15W
Laser: Semiconductor-pumped solid-state laser
Semiconductor laser Laser safety factor: Level 4
Laser power/wavelength: Red light 4W/638nm, green light
2W/520nm, Blue light 4w/445nm
Scanning system: ILDA25Kpps-30Kppshigh-speed scanning
Control mode: Voice control/automatic/
master-slave control DMX512 per unit series
Number of channels: 12 Weight: 6.3kg

SF-LS015IP

15W防水动画激光
15W Waterproof Animation Laser Light



技术参数

光源:红120mw蓝300mw绿80mw
颜色:RGB(红绿蓝)全彩激光
电压:12V/220V
控制:声控/自走/DMX512
扫描方式:高速振镜扫描方式
产品重量:2.5KG

Technical Parameters

Light source: Red 120mw, blue 300mw,
green 80mw
Color :RGB(red, green, blue)full-color laser
Voltage :12V/220V
Control: Voice control/self-propelled /DMX512
Scanning method:High-speed galvanometer
scanning method
Product weight :2.5KG

SF-LS017

30W-60W全彩防水动画激光
30W-60W Full-Color Waterproof
Animation Laser



技术参数

输入电源:AC90-240,50-60HZ
额定功率：<600W
激光功率：RGB30W
激光波长：红光 638nm,绿光 525nm,蓝光 450nm
控制模式：声控/自走/主从机/DMX512
适合场所：中小型演出、酒吧等场所
工作环境：室内外（零下30~零上35度）
防护级别:IP56
冷却系统：激光器带TC制冷，整机风机强制冷却

Technical Parameters

Input power supply: AC90-240,50-60HZ
Rated power:<600W
Laser power: RGB30W
Laser wavelength: red light 638nm,
green light 525nm, blue light 450nm
Control mode: voice control/self-propelled/
master-slave/DMX512
Suitable places: small and medium-sized performances,
bars, and other places
Working environment: indoor and outdoor (-30° C to +35° C)
Protection level: IP56
Cooling system: Laser with TC cooling,
forced cooling by fan for the entire machine

SF-LS018

蓝牙激光LOGO灯
Bluetooth Laser LOGO Light



技术参数

电压:100-240V, 50/60Hz
功率:500mw-2000mw
光源:6070灯珠60W*5个，7070灯珠96个，
分为12个部分，
辅助灯:灯珠5050颗72颗LED光源预期
控制协议:DMX512、RDM
X /Y轴:16位精度扫描自动校正X /Y轴位置
产品尺寸:525mm×180mm×365mm
包装尺寸:600mm × 420mm × 270mm
N.W: 12kg, G.W: 14kg

Technical Parameters

Voltage :100-240V, 50/60Hz
Power :500 w
Light source :6070 lamp beads 60W*5, 7070
lamp beads 96,
Divided into 12 parts,
Auxiliary light: Lamp beads 5050 72 LED
light source expected
Control protocol :DMX512, RDM
X /Y axis :16 bit precision scan automatically
corrects X /Y axis position
Product size :525mm×180mm×365mm
Package size :600mm × 420mm × 270mm
N.W: 12kg, G.W: 14kg

SF-LS020

双头红绿/绿/蓝/全彩
Dual-Head Red & Green / Green / Blue / Full-Color Laser Light





技术参数

电 压:AC110-220V 50/60Hz
总功率:30W光源:半导体激光发生器激光
功率:绿40mW,红100mW,蓝500mW
激光颜色:绿红/绿/蓝
控制方式:DMX512/自走/声音控制
通道:7个DMX-512信号通道
工作环境:室内(10-35°)
包装尺寸:430x250x190mm
毛重:5kg

Technical Parameters

Voltage: AC 110–220 V, 50/60 Hz Total Power: 30 W
Light Source: Semiconductor laser
Laser Power: Green 40 mW, Red 100 mW, Blue 500 mW
Laser Colors: Green-Red/Green/Blue
Control Modes: DMX512/Auto/Sound Control
Channels: 7 DMX-512 signal channels
Operating Environment: Indoor (10–35°C)
Package Dimensions: 430 x 250 x 190 mm
Gross Weight: 5 kg

SF-LS019

单头扫描激光
Single-head scanning laser Light





技术参数

输入电源:AC100-240V 电源频率:50/60Hz
功率:500MW
光源:固态晶体管激光器
控制:声控、自走、DMX512、主从控制
调光:0-100%线性
调光产品尺寸:18.5CMX14CMX6CM
重量:1KG

Technical Parameters

Power supply: AC100-240V
Frequency: 50/60Hz Power: 500W
Light source: Solid-state transistor laser
Control: Audio-controlled, self-propelled, DMX512, master-slave control
Dimming: 0-100% linear dimming
Product dimensions: 18.5cm x 14cm x 6cm
Weight: 1kg

SF-LS022

6头全彩扫描激光
6Heads Full Color Light





技术参数

光源:红激光器、蓝激光器、绿激光器
功率:80W
激光功率:红100MW.绿50MW,蓝70OMW
电压:AC100V-240V，50Hz-60Hz
控制模式:DMX控制、声控模式、自走
产品尺寸:62.5*15.5*10cm
净重:约4.5kg
适用场景:KT包厢/酒吧/宴会/派对/家居环境

Technical Parameters

Light Source: Red laser, blue laser, green laser
Power: 80W
Laser Power: Red 100mW, Green 50mW, Blue 70mW
Voltage: AC 100V–240V, 50Hz–60Hz
Control modes: DMX control, sound-activated mode, auto-run
Product dimensions: 62.5 × 15.5 × 10 cm
Net weight: approx. 4.5 kg
Suitable for: KTV rooms, bars, banquets, parties, home environments

SF-LS021

4头全彩扫描激光
4 Heads Full Color Scanning Laser Light





技术参数

光源:红激光器、蓝激光器、绿激光器
功率:30W
激光功率:红100MW、绿50MW、蓝700MW
电压:AC100V-240V，50Hz-60Hz
控制模式:DMX控制、声控模式、自走产品
尺寸:62.5*15.5*10cm
净重:约4.5kg
适用场景:KTV包厢/酒吧/宴会/派对/家居环境

Technical Parameters

Light source: Red laser, blue laser, green laser. Power: 30W.
Laser power: Red 100MW, green 50MW, blue 700MW.
Voltage: AC100V-240V,50Hz-60Hz.
Control modes: DMX control, voice control, self-propelled operation.
Product dimensions: 62.5*15.5*10cm.
Net weight: Approximately 4.5kg.
Applicable scenarios: KTV rooms/bars/banquets/parties/home environments.

SF-LS034

摇头激光+7颗大蜂眼-灯带
Moving-Head Laser + 7 Large Bee-Eye LED Strip



技术参数

额定频率:50 ~ 60Hz 额定功率:350W
激光颜色:RGB全彩色 激光功率:RGB 8W
激光光源:R3w/638nm G2w/525nm B3w/447nm
激光图案:256幅激光动画图案
LED光源:7颗40瓦LED高亮灯珠
LED灯带:38颗5050 *0.2W
灯带颜色:RGB*0.2W

Technical Parameters

Rated Frequency: 50–60 Hz
Rated Power: 350 W Laser Color: RGB Full Color
Laser Power: RGB 8 W
Laser Source: R3W/638 nm, G2W/525 nm, B3W/447 nm
Laser Patterns: 256 laser animation patterns
LED Light Source: 7 x 40W high-brightness LED chips
LED Strip: 38 x 5050 *0.2W
Strip Color: RGB *0.2W

SF-LS023

8眼激光蜘蛛灯（R/G/B/RGB)
8 Eyes Laser Spider Lighf (R/G/B/RGB)



技术参数

输入电压:AC90-240V 50-60Hz
功率:250mw红色(2支),
80mw绿色(4支),500mw(2支)
控制模式:DMX 512，声控激活和自走控制
通道:13个DMX通道
功耗:80W尺寸:430x210x290mm
包装尺寸:540x290x430mm
净重:7.0KG
毛重:8.5KG

Technical Parameters

Input voltage: AC90-240V 50-60Hz
Power: 250W (red lights: 2 units), 80W (green lights: 4 units), 500W (red lights: 2 units)
Control mode: DMX 512 with voice activation and auto channel control (13 DMX channels)
Power consumption: 80W
Dimensions: 430x210x290mm
Packaging dimensions: 540x290x430mm
Net weight: 7.0kg
Gross weight: 8.5kg

SF-LS035

摇头动画激光
Moving-Head Animation Laser



技术参数

功率配置:8W / 10W 激光功率:8W
(红光:2W,绿光:2.5W,蓝光:3.5W),
10W(红光:13W,绿光:3W,蓝光:4W)
功耗:≤150W 净重:8.6KG
电压/功率:AC 110~240V 50/60Hz
旋转角度:X轴540°/ Y轴270°
机箱尺寸: 27.5*19.5*40CM
包装重量:一箱装(47.5*35*27.5 / 10kg)
一装二(49.5*37*57.5 / 20.8kg)

Technical Parameters

Power Configuration:8W / 10W
Laser Power:8W(Red:2W/Green:2.5W/Blue:3.5W)
10W(Red:13W/Green:3W/Blue:4W)
Power Consumption: ≤ 150W
Voltage/Power: AC 110–240V, 50/60Hz
Rotation Angle: X-axis 540° / Y-axis 270°
Chassis Dimensions:27.5 × 19.5 × 40 cm
Net Weight: 8.6 kg Packaging Weight:
Single-unit box (47.5 x 35 x 27.5 cm/10 kg)
Double-unit box (49.5 x 37 x 57.5 cm/20.8 kg)

SF-LS024

激光九头鸟(R/G/B/RGB)
Laser Nine-Head Bird (R/G/B/RGB)





技术参数


电压:AC90-245V 50Hz/60HZ
功耗:140W净重:36 KG;毛重:7KG
尺寸:458x429x208mm
功率:250mW红色(3支),80mW绿色(3支)
500mW(3支)
控制模式:DMX，声控,自走控制
通道:13个DMX通道

Technical Parameters

Voltage :AC90-245V, 50Hz/60HZ
Power consumption :140W
Net weight :36 KG Gross weight :7KG
Dimensions :458x429x208mm
Power :250mW Red (3 units), 80mW Green (3 units), 500mW(3 units)
Control mode :DMX, voice control, self-propelled control
Channels :13 DMX channels

SF-LS031
激光帘幕光束
Laser Curtain Beam light





技术参数


输入电压：AC110-230V
光网负载：16路
连接方式：正、负极线路直接连接
(内置低压电源)
DMX 传输：网口
控制模式：自走、声控、DMX
防水防尘：IP20
绝缘类型：一类电器，带漏电保护

Technical Parameters

Input voltage: AC110-230V
Optical network load: 16-way
Connection: Positive and negative line direct connection (built-in low voltage power supply)
DMX transmission: network port
Control mode: self-propelled, voice control, DMX
Waterproof and dustproof: IP20

SF-LS026
48图水纹激光
48-Pattern Water Ripple Laser





技术参数

电源: AC 90-250V.50-60Hz
控制模式: 声控/自走
激光颜色:红/绿/蓝色
LED:5w*1波长:红 650nm、绿 532nm
激光功率:红 100mw、绿 100mw
散热系统:风扇 产品尺寸: 22*14*6cm
单个包装尺寸:24*19*14cm
16台装包装尺寸:50.5*40.5*60.5cm

Technical Parameters

Power supply: AC 90-250V, 50-60Hz
Control mode: Voice control/Auto
Laser color: red/Green/blue
LED:5w*1 Wavelength: Red 650nm, Green 532nm
Laser power: Red 100mw, Green 100mw
Cooling system: Fan
Product size: 22*14*6cm
Single package size :24*19*14cm
The packaging size for 16 units is 50.5*40.5*60.5cm

SF-LS037
六眼全彩光束萤火虫
Six-Eye Full-Color Beam Firefly Laser





技术参数

功率光源： 2W粗光斑*6，2W萤火虫图案*1
功耗：≤200W DMX通道：7CH / 31CH
电压/功率：AC 110~240V 50/60Hz
控制系统：自走、DMX512、主从、声控
光斑直径：15mm粗光束
冷却系统：风冷净重：5.25KG
机箱尺寸：70*8.5*20CM
包装重量：一箱装（78×28×17 / 6.7kg）
一装二（80×30×37.5 / 14.2kg）

Technical Parameters

Light Source: 6 x 2W wide beam, 1 x 2W firefly pattern
Power Consumption: ≤200W Net Weight: 5.25 kg
DMX Channels: 7CH / 31CH
Cooling System: Air-cooled
Voltage/Power: AC 110–240V, 50/60Hz
Control System: Auto, DMX512, Master/Slave, Sound
Beam Diameter: 15mm wide beam
Chassis Dimensions: 70 × 8.5 × 20 cm
Packaging Weight: Single-unit box
(78 × 28 × 17 cm / 6.7 kg)
Dual-unit box (80 × 30 × 37.5 cm / 14.2 kg)

SF-LS039
户外银河星空萤火虫
Outdoor Galaxy Starry Firefly Laser Light





技术参数

功率光源：白8W*1；LED红绿蓝白80W*1
功耗：≤240W 防水等级：IP65
DMX通道：4CH / 8CH
电压/功率：AC 110~240V 50/60Hz
控制系统：自走、DMX512、主从、声控
机箱尺寸：70*9*14CM 净重：4.2KG
包装重量：一箱装（78*22*19 / 5.3kg）
一装二（80*24*40 / 10.6kg）

Technical Parameters

Light Source: 8W white × 1; 80W LED (red, green, blue, white) × 1
Power Consumption: ≤240W
Waterproof Rating: Ip65 DMX Channels: 4CH / 8CH
Voltage/Power: AC 110–240V,50/60HzControl System: Standalone, DMX512, Master/Slave, Sound Control Net Weight: 4.2 kg
Enclosure Dimensions: 70 x 9 x 14 cm
Packaging Weight: Single-unit box
(78 x 22 x 19 cm / 5.3 kg)
Dual-unit box (80 x 24 x 40 cm / 10.6 kg)

SF-LS036
电池款动画激光灯
Battery-Powered Animation Laser Light



技术参数

功率光源:1W/2W/3W 功耗:<100W
激光功率:1W
(红光:0.3W/绿光:0.2W/蓝光:0.5W)
2W(红光:0.6W/绿光:0.5W/蓝光:1W)
3W(红光:0.7W/绿光:0.8W/蓝光:1.5W)
电压/功率:AC 110~240V 50/60HZ
机箱尺寸:15*15.5*11CM 净重:2.1KG
包装重量:一箱装(27.5*22*18/2.45kg)
一装六(67*30*39/16.5kg)

Technical Parameters

Power Source: 1W/2W/3W Power Consumption: <100W
Laser Power: 1W (Red: 0.3W / Green: 0.2W / Blue: 0.5W)
2W (Red: 0.6W / Green: 0.5W / Blue: 1W)
3W (Red: 0.7W / Green: 0.8W / Blue: 1.5W)
Voltage/Power: AC 110–240V, 50/60Hz
Enclosure Dimensions: 15 x 15.5 x 11 cm
Net Weight: 2.1 kg
Packaging Weight: Single box
(27.5 x 22 x 18 cm / 2.45 kg)
Pack of six (67 x 30 x 39 cm / 16.5 kg)

SF-LS027
全彩激光萤火虫激光灯
Full-Color Firefly Laser Light



技术参数

功率:2000mW
激光波长:530nm*638nm*450nm
激光光源:半导体泵浦激光器
颜色:红绿蓝全彩
控制模式:自走、DMX512
适用场所:KTV包房、室外景观亮化等

Technical Parameters

Power :2000mW
Laser wavelength :530nm*638nm*450nm
Laser light source: Semiconductor-pumped laser
Color: Full colors of red, green and blue
Control mode: Self-propelled, DMX512
Applicable places :KTV private rooms, outdoor landscape lighting, etc

SF-LS038
2W防水星空激光
2W Waterproof Starry Sky Laser Light





技术参数

功率光源： 2000mW DMX通道：4CH / 8CH
颜色可选：全彩、彩色、白、黄色、绿色
功耗：≤20W 防水等级：IP65
电压/功率：AC 110~240V 50/60Hz
控制系统：自走、DMX512、主从、声控
机箱尺寸：24*16.5*9CM 净重：2.35KG
包装重量：一箱装（27.5*22*18.5 /2.8kg）
一装六（68*30*40 / 16.8kg）

Technical Parameters

Light Source Power: 2000mW
Waterproof Rating: Ip65 Power Consumption: ≤20W
DMX Channels: 4CH / 8CH
Voltage/Power: AC 110–240V, 50/60Hz
Control System: Auto, DMX512, Master/Slave, Sound Control Enclosure Dimensions: 24 x 16.5 x 9 cm
Net Weight: 2.35 kg
Packaging Weight: Single-unit box
(27.5 x 22 x 18.5 cm / 2.8 kg)
Six-unit pack (68 x 30 x 40 cm / 16.8 kg)

SF-LS040
拼接式激光
Splicing Laser






技术参数

输入电压:交流110~240V
光源:激光
工作温度（℃）:-35 - 65
产品重量 (kg):2.1
颜色:红/蓝/绿 3in1
尺寸:19.5*18*24CM

Technical Parameters

Input Voltage: 110–240 V AC
Light Source: Laser
Operating Temperature (°C): -35–65
Product Weight (kg): 2.1
Color: Red/Blue/Green 3-in-1
Dimensions: 19.5 × 18 × 24 cm

SF-LS041
车载防水激光射灯
Waterproof Vehicle-Mounted Laser Spotlight



技术参数

输入电压:12V-24V / 220V 控制模式:自动
激光输出波长（nm）:绿色 520
光斑椭圆度:>0.9 总功率:30W
功率稳定性:5% 输出光斑直径(mm)>5
预热时间(分钟):<15 调制模式: TTL
产品尺寸:13.5 x 10 x 12 cm
总重量(千克):净重 1.5 千克/毛重 3 千克
激光输出功率(mW):1000 mW/2000 mW/4000 mW

Technical Parameters

Input Voltage: 12V–24V / 220V
Control Mode: Automatic
Laser Output Wavelength (nm): Green 520
Spot Ellipticity: >0.9 Total Power: 30W
Power Stability: 5%
Output Spot Diameter (mm): >5
Warm-up Time (min): <15 Modulation Mode: TTL
Product Dimensions: 13.5 x 10 x 12 cm
Total Weight (kg): Net weight 1.5 kg, Gross weight 3 kg
Laser Output Power (mW): 1000 mW / 2000 mW / 4000 mW

SF-LS042
大功率光幕激光灯(黑色款)
High-Power Laser Light Curtain (Black)



技术参数

电压:AC220V频率:50-60Hz
颜色:单红/单绿/单蓝、红绿/红蓝/蓝绿、红绿蓝
净重:8.3kg
尺寸: 32cm*33cm*25cm
通用范围:户外工程、地标、高速路警示、定点指示、救援等

Technical Parameters

Voltage: AC 220V
Frequency: 50–60 Hz
Colors: Single red/single green/single blue; red-green/red-blue/blue-green; red-green-blue
Net weight: 8.3 kg
Dimensions: 32 cm × 33 cm × 25 cm
Applications: Outdoor projects, landmarks, highway warning signs, location markers, rescue operations, etc.

SF-LS043
车载光幕激光灯
In-vehicle laser light curtain



技术参数

电压:90-250V,50/60Hz
波长:红650nm 绿532nm，蓝450nm
电源变压:12V/24V/220V
防水等级:IP65
尺寸: 14.5*13.5*13.5(cm)
激光重量:1.4kg
激光射程:1200米

Technical Parameters

Voltage: 90–250 V, 50/60 Hz
Wavelength: Red 650 nm, Green 532 nm, Blue 450 nm
Power Supply: 12 V/24 V/220 V
Waterproof Rating: IP65
Dimensions: 14.5 × 13.5 × 13.5 cm
Weight: 1.4 kg
Range: 1,200 meters

SF-LS028
激光一字线(防水款)
Waterproof Linear Laser



技术参数

电压:AC20/220V50Hz-60Hz
激光大小:2CM
激光颜色:红绿蓝
电源:宽压，家用电直插直用
尺寸:13.5*28*10cm
净重:1.5KG

Technical Parameters

Voltage :AC20/220V50Hz-60Hz
Laser size :2CM
Laser colors: red, green and blue
Power supply: Wide voltage, household electricity is directly plugged in for direct use
Size :13.5*28*10cm
Net weight :1.5KG

SF-LS044
一字线激光灯（可调粗细）
Single-line laser pointer (adjustable beam width)

防水款 普通款



技术参数

尺寸: 10*7.5*12.5(cm)
重量: 0.3kg
输入电压: 110~220V/12V
(适配器220V转12V)
激光颜色: 单红、单绿、单蓝
防水等级: IP20(不防水，适合室内环境)
控制模式: 插电常亮
场景适用: 厂房/车间/园区/仓库等划线
可否调焦: 是

Technical Parameters

Dimensions: 10 x 7.5 x 12.5 cm
Weight: 0.3 kg
Input Voltage: 110–220 V / 12 V
(220 V to 12 V adapter included)
Laser Color: Single red, single green, single blue
Waterproof Rating: IP20 (Not waterproof; suitable for indoor environments)
Control Mode: Plug-in, always-on
Applications: Line marking in factories, workshops, industrial parks, warehouses, etc.
Focus Adjustable: Yes

SF-LS029
多光束防水激光灯
Multi-Beam Waterproof Laser Light

防水款 普通款



技术参数

产品功率:4/6/8/10/12W
产品净重:3.5KG
产品尺寸:19X23X31cm
产品电压:220V
适用场景:高速路/地标/车载/楼顶引流/建筑亮化等

Technical Parameters

Power:4/6/8/10/12W
Net weight:3.5KG
Product Size:19X23X31cm
Voltage:220V
Scene:Highway/landmark/vehicle/rooftop diversion/architectural lighting, etc.

SF-LS033IP
防水款一字线（可调长短）
Waterproof Linear Laser (Adjustable Length)



技术参数

输入电压:220V-240V 总功率:10W
激光输出功率(mW)1000
激光输出波长(nm):绿光520/红光638/蓝光450
动力稳定性:99.99% 镜头角度: 60度
预热时间(min):<15
工作温度: -40 ~ 50℃
储存温度: -40 ~ 50℃ 调制方法:TT
净重1.2kg 毛重1.6 KG

Technical Parameters

Input voltage :220V-240V Total power :10W
Laser output power (mW)1000
Laser output wavelength (nm): Green light 520/ Red light 638/ Blue light 450
Dynamic stability :99.99%
Lens Angle: 60 degrees
Preheating time (min): <15
Operating temperature: -40 to 50℃
Storage temperature: -40 to 50℃
Modulation method :TT N.W: 1.2kg G.W: 1.6 kg

SF-LS030
大功率防水激光射灯
High-Power Waterproof Laser Spotlight



技术参数

电压:AC220V
功率:红2W/绿2W芯6W黄4W白10W
频率:50-60HZ
颜色:单红/绿/蓝/黄/白
光源:1W激光红绿/蓝光发射器
净重:4.5KG 尺寸::45cm*40.5cm*37.5cm
通用范围:户外工程、地标、高速路警示、定点指示、救援等

Technical Parameters

Voltage:AC220V Frequency: 50-60HZ
Power: red 2W / green 2W core 6W yellow 4W white 10W
Color: single red/green/blue/yellow/white
Light source: 1W laser red green/blue light emitter
Net weight:4.5KG Size::45cm*40.5cm*37.5cm
General scope: outdoor engineering, landmarks, highway warning, fixed-point instructions, rescue, etc.

水纹LOGO灯系列

Water Ripple Logo Light Series



SF-A018
200W logo灯
200W Logo Light




技术参数

颜色:单种颜色/七彩
防水等级:IP67
防水工作环境:-40°C-60°C
产品尺寸:36X33(CM)
功率:200W-300W
电压:110V-240V色温:3000K-6000K
机身材质:铝合金 重量:7.7KG

Technical Parameters

Color:single color/seven colors
Waterproof grade:IP67
Waterproof working environment:-40°C-60°C
Product Size:36X33(CM)
Power:200W-300W
Voltage:110V-240V Color temperature:3000K-6000K
Body Material:Aluminum Alloy
Weight:7.7KG

SF-A019
200W水纹灯
200W Water Ripple Light

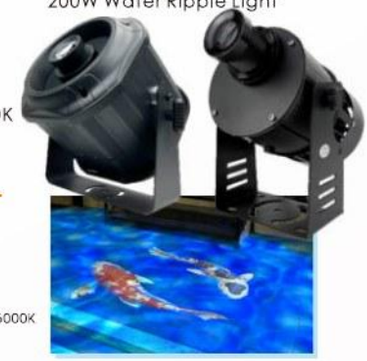

技术参数

颜色:单种颜色/七彩
防水等级:IP67
防水工作环境:-40°C-60°C
产品尺寸:36X33(CM)
功率:200W-300W
电压:110V-240V
色温:3000K-6000K
机身材质:铝合金 重量:7.7KG

Technical Parameters

Color:single color/seven colors
Waterproof grade:IP67
Waterproof working environment:-40°C-60°C
Product Size:36X33(CM)
Power:200W-300W
Voltage:110V-240V
Color temperature:3000K-6000K
Body Material:Aluminum Alloy
Weight:7.7KG

SF-A015
50WLED高清旋转广告投影灯
50W LED High-Definition Rotating Gobo Projector



技术参数

电压:AC110V-240V, 50-60Hz
LED (R12G20,B20, W20)/216W
控制模式:DMX512, 主/从, 声控
通道:4/8CHS可选 灯泡:72颗x3W高亮度
光束角:25°(标准)/15°/35°/45°/60°可选
额定功率:240W 净重:6.3kg
包装尺寸:670*390*460mm(2台/箱)

Technical Parameters

Voltage:AC110V-240V,50-60Hz
LED (R12G20,B20, W20)/216W
Control Mode: DMX512, Master/Slave, Voice Control
Channel:4/8CHS selectable
Lamp:72pcs x 3W high brightness
Beam angle:25°(standard)/15°/35°/45°/60°optional
Rated power:240W
Packing Size:670*390*460mm(2pcs/ctn)
Net weight:6.3kg

SF-A016
12W嵌入式高清LED Logo灯
12W Embedded High-Definition LED Logo Light




技术参数

电压:AC100-240V, 50/60Hz
功率:12W 光源:12W 科锐 LED
功能强大, 寿命长, 亮度高
IP速率:IP20 开孔尺寸:95mm
尺寸:56*170*95mm
重量:1.0kg
应用:室内, 广告投影, 指南,
婚礼舞台, 房间 投影等

Technical Parameters

Voltage:AC100-240V,50/60Hz
Power:12W
Light source:12W CORE LEDs
Powerful, long life, high brightness
IP rate:IP20
Opening Size:95mm
Size:56*170*95mm
Weight:1.0kg
Application:Indoor, advertising projection, guide, wedding stage, room projection, etc.

SF-A021
星空幕布
Star Curtain




技术参数

电压:AC90V-260V.50/60HZ
功耗:12W
灯珠颜色: 红、蓝、绿、白、
暖自可选
灯珠密度:20颗每平米幕布
布料:防水阻燃天鹅绒布
尺寸:可购买常规尺寸,
可定制任何尺寸

Technical Parameters

Voltage: AC90V-260V.50/60HZ
Power consumption: 12W
Lamp bead color: red, blue, green, white, warm from the optional
Lamp bead density: 20 per square meter curtain
Fabric: waterproof flame retardant velvet cloth
Size: regular size can be purchased, can be customized to any size

SF-A020
LED千层地砖灯
LED Multi-Layer dance floor



技术参数

电压: dc12v
功率: 18w
光源: 60 5050贴片灯珠
颜色: 全彩
寿命: ≥100000小时
材质: ABS+钢化玻璃

Technical Parameters

Voltage: DC12VPower: 18w
Light source: 60 5050 SMD lamp beads
Color: full color
Lifespan: ≥100000 hours
Material: ABS+tempered glass

SF-A031
360 摄影棚 PRO autunatic
金属圆形支架
360° Rotating Metal Photo Booth



技术参数

电压: 111V-240V (含)
功率: 21W(含)-30W(含)
质保年: 1年
材质: 不锈钢
照射面积: 1㎡-3㎡
光源类型: led灯
光源个数 (1个)
颜色分类: 黑色,蓝色,花色

Technical Parameters

Voltage: 111V-240V (included)
Power: 21W(included)-30W(included)
Warranty year: 1 year
Material: stainless steel
Irradiation area: 1 square meters -3 square meters
Light source type: led lamp
Number of light source (1)
Color classification: black, blue, flower color

SF-A032
Diamand 玻璃 360 Photo展位
Diamond Glass 360° Photo Booth



技术参数

电压: 111V-240V (含)
功率: 21W(含)-30W(含)
质保年: 1年
材质: 不锈钢+玻璃
照射面积: 1㎡-3㎡
光源类型: led灯
光源个数 (1个)
颜色分类: 黑色,蓝色,花色

Technical Parameters

Voltage: 111V-240V (included)
Power: 21W(included)-30W(included)
Warranty year: 1 year
Material: stainless steel + glass
Irradiation area: 1 square meters -3 square meters
Light source type: led lamp
Number of light source (1)
Color classification: black, blue, flower color

LED复古灯系列

LED Retro Light Series



SF-LED001
长条防水复古灯
Waterproof Linear Retro Light






技术参数
灯体尺寸：100*13.5*10cm
净重：8.75KG
毛重：9.5KG

Technical Parameters
Lamp body size: 100*13.5*10cm
Net weight: 8.75KG
Gross weight: 9.5KG

SF-LED002
两眼观众（双色温三合一）
Two-Head Audience Light (Bi-Color, 3-in-1)





技术参数
光源2颗100W-COB双色温，72颗5050 幻彩0.3W灯珠
总功率 180W
通道模式 A001/113个通道前，d001/13个后通道
控制方式：标准DMX512信号协议
外包装：49*40*39cm
内包装：38*23*18cm
净重：10KG
毛重：13.2KG 装箱数：4

Technical Parameters
The light source consists of 2 100W-COB dual-color temperature beads and 72 5050 iridescent 0.3W beads
Total power: 180W
Channel mode A001/113 channels in front and a001/13 channels in rear
Control mode: Standard DMX512 signal protocol
Outer packaging: 49*40*39cm
Inner packaging: 38*23*18cm
Net weight: 10KG Gross weight: 13.2KG
Number of boxes packed: 4

SF-LED003
六颗复古灯三合一
Six-Head Retro Light, 3-in-1





技术参数
电压: AC100~220V 50/60HZ
功率: 864*0.3W+ 6*50W-(实际功率：250W)
灯珠: 864颗5050三色LED灯珠+6颗暖白COB灯珠
控制方式: DMX512/自走/主从/声控/带RDM功能
调光: 32bit 0~100%线性调光
特点： 染色+爆闪+辅光
工作温度: -30度~50度 频闪频率: 1~30HZ
IP 等级: Ip20 外包装： 155*26*26cm
净重：14.85KG 毛重：16.9KG 装箱数：1

Technical Parameters
Voltage: AC100-220V 50/60HZ
Power: 864*0.3W+ 6*50W-(Actual power: 250W)
LED beads: 864 5050 three-color LED beads + 6 warm white COB beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
Dimming: 32-bit 0~100% linear dimming
Features: Dyeing + flash + auxiliary lighting
Operating temperature: -30 degrees to 50 degrees
Stroboscopic frequency: 1 to 30HZ
IP rating: Ip20 Outer packaging: 155*26*26cm
Net weight: 14.85KG Gross weight: 16.9KG
Number of boxes packed: 1


SF-LED004
7颗复古灯 三合一
Seven-Head Retro Light, 3-in-1



技术参数
电压: AC100~220V 50/60HZ
功率: 1176*0.3W+ 7*50W-(实际功率：350W)
灯珠: 1176颗5050三色LED灯珠+7颗暖白COB灯珠
控制方式: DMX512/自走/主从/声控/带RDM功能
调光: 32bit 0~100%线性调光
特点： 染色+爆闪+辅光 工作温度: -30度~50度
频闪频率: 1~30HZ IP 等级: IP20
灯体尺寸：80*14*71cm 外包装：100*85*25cm
净重：20.45KG 毛重：22.5KG 装箱数：1

Technical Parameters
Voltage: AC100-220V 50/60HZ
Power: 1176*0.3W+ 7*50W-(Actual power: 350W)
LED beads: 1,176 5050 three-color LED beads + 7 warm white COB beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
Dimming: 32-bit 0~100% linear dimming
Features: Dyeing + flash + auxiliary lighting
Operating temperature: -30 degrees to 50 degrees
Stroboscopic frequency: 1 to 30HZ IP rating: IP20
Lamp body size: 80*14*71cm
Outer packaging: 100*85*25cm
N. W: 20.45KG G. W: 22.5KG


SF-LED005
四眼复古灯
Four-Head Retro Light



技术参数
电压: AC100~240V 50/60HZ
功率: 总功率220W
控制方式: DMX512、自走、主从。
通道: ch17,ch30。
调光: 8bit 0~100%线性调光
灯体尺寸：38*38*13cm
内包装：45*45*22cm 外包装：47*47*47cm
净重：6.7KG 毛重：16.9KG 装箱数：2

Technical Parameters
Voltage: AC100-240V, 50/60HZ
Power: Total power 220W
Control mode: DMX512, self-propelled, master-slave,
Channel: ch17,ch30.
Dimming: 8-bit 0-100% linear dimming
Lamp body size: 38*38*13cm
Inner packaging: 45*45*22cm
Outer packaging: 47*47*47cm
Net weight: 6.7KG
Gross weight: 16.9KG \nNumber of boxes packed: 2


SF-LED006
5颗复古灯
Five-Head Retro Light



技术参数
输入电压：95V-265V，50-60Hz
功率输出：260W，36V/6.3A+12V/3A
控制模式：CH11，CH35 CH42，
自CH04 DMX512/机器/语音控制
珠子：5颗50W金光1800K+90 RGB，0.2W
全灯功率：180W 灯体尺寸：98*15.6*14.5cm
外包装：124*44*19cm
内包装：122*21*17cm
净重：4.5KG 毛重：11KG 装箱数：2

Technical Parameters
Power input voltage: 95V-265V, 50-60Hz
Power output: 260W, 36V/6.3A+12V/3A
Control mode: CH11, CH35, CH42,
from CH04 DMX512/ machine/voice control
Beads: 5 pieces of 50W golden light 1800K+90 RGB, 0.2W
Full lamp power: 180W
Lamp body size: 98*15.6*14.5cm
Outer packaging: 124*44*19cm
Inner packaging: 122*21*17cm
Net weight: 4.5KG Gross weight: 11KG
Number of boxes packed: 2

SF-LED007
复古三角灯
Retro Triangular Light



技术参数
电源：AC100-240V50/60Hz 功率：360W
光源：16*30W 1800K 金黄光 576*0.2W RGB5050灯珠
寿命：50000小时 调光：0-100%线性调光
频闪：0-20Hz，
控制：DMX512，RDM，自走，声控模式
通道模式：6/11/22/64/71通道模式可选
灯体尺寸：80*70*20cm 外包装：90*78*21cm
净重：10KG 毛重：11.12KG 装箱数：1

Technical Parameters
Power supply: AC100-240V50/60Hz Power: 360W
Light source: 16*30W 1800K golden yellow light
576*0.2W RGB5050 LED beads
Lifespan: 50,000 hours
Dimming: 0-100% linear dimming
Stroboscopic: 0-20Hz
Control: DMX512, RDM, self-propelled, voice control mode
Channel mode: 6/11/22/64/71 Channel mode is optional
Lamp body size: 80*70*20cm
Outer packaging: 90*78*21cm
N.W: 10KG G.W: 11.12KG Number of boxes packed: 1

SF-LED008
复古三叶风扇灯
Retro Three-Blade Fan Light



技术参数
电压：AC220V/50Hz 功率：260w
灯珠：3颗60w黄金 COB （主光）36颗3w3535三合一灯珠（辅光 RGB）（染色光束 RGBW）
控制方式：国际通用DMX512/主 / 从机/自走/声控
调光模式：0-100%超平滑调光
频闪：25次 / 秒
灯体尺寸：45*23*49cm
外包装：59*52*55cm 内包装：57*50*26cm
净重：7.95KG 毛重：18.8KG
装箱数：2

Technical Parameters
Voltage: AC220V/50Hz2 Power: 260w
Led beads: 3 60w gold COB beads (main light), 36 3W 3535 three-in-one LED beads (auxiliary light RGB) (color beam RGBW)
Control mode: International standard DMX512, master/slave, self-propelled, voice control.
Dimming mode: 0-100% ultra-smooth dimming
Stroboscopic: 25 times per second
Lamp body dimensions: 45*23*49cm
Outer packaging: 59*52*55cm
Inner packaging: 57*50*26cm
N. W: 7.95KG G. W: 18.8KG

SF-LED009
单颗复古灯
Single-Head Retro Light



技术参数
电压:AC100-220V 50-60HZ
光源:72颗50 50三色LED灯珠+长条白光灯珠
功率:72*0.3W(20W)+100W
控制方式:DMX512,自走,主从,声控,带RDM功能
调光:32bit0-100%线性调光
特点:染色+爆闪+辅光
工作温度:-30度-50度
频闪频率:1-30Hz 灯体尺寸：20*11*25cm
外包装：55*31*35cm
净重：2.6KG 毛重：11.35KG

Technical Parameters
Voltage :AC100-220V 50-60HZ
Light source :72 50-50 three-color LED beads + long white light beads
Power :72*0.3W(20W)+100W
Dimming: 32-bit 0-100% linear dimming
Features: Dyeing + flash + auxiliary lighting
Operating temperature :-30 ° C to 50 ° C
Stroboscopic frequency :1-30Hz
Lamp body size: 20*11*25cm
Outer packaging: 55*31*35cmN.W: 2.6KG G.W: 11.35KG

户外灯系列

Outdoor Light Series



SF-B001IP
LED72/96颗双层投光灯
LED72/96 Double-layer Flood Light



技术参数

输入电压:AC100-240V 50/60HZ
功率:800W
光源:72pcs*10W 4in1 RGBW
角度:25°135°145°(可选)
控制:DMX512,主从,自动,主从
DMX通道:4/8CH
木箱尺寸:720x300x320mm
航空箱尺寸:630x420x820mm
净重:38kg 毛重:41kg

Technical Parameters

Input Voltage:AC100-240V 50/60HZ
Power:800W
Light source:72pcs*10W 4in1 RGBW
Angle:25°135°145°(optional)
Control:DMX512,master-slave,auto,master-slave
DMX channel:4/8CH
Wooden case size:720x300x320mm
Dimension of air box:630x420x820mm
Net weight:38kg Gross Weight:41kg

SF-500WIP
LED48颗投光灯
48x LED Flood Light



技术参数

输入电压:AC 110-240V 产品重量 :25 kg
显色指数:85 工作温度:-10℃ - 45℃
光源寿命:50000H 颜色:RGBW混色
灯光角度:15/25/45 °
控制方式:DMX512，主从，自动，声音
IP等级:IP65
单品包装尺寸:65X55X45 厘米
单品毛重:26 kg

Technical Parameters

Input voltage :AC 110-240V Product weight :25 kg
Color rendering index :85
Operating temperature :-10°C to 45°C
Light source lifespan: 50,000 hours
Color :RGBW mixed color
Lighting Angle :15/25/45 °
Control mode :DMX512, master-slave,
automatic, sound IP rating :IP65
Single item packaging size :65X55X45 cm
Gross weight of a single item :26 kg

SF-B300WIP
LED48颗投光灯
48x LED High-Power Flood Light



技术参数

电压:110v-220v 功率:480w
光源:48颗led红绿蓝自4合1,单颗10w
发光角度:25度 调光:0-100%线性调光
频闪:频闪速度可调
防水等级:IP65
控制方式:DMX512，自走，主从等
通道:8通道 灯体:铸铝
尺寸:15x22x40cm 净重:15kg 毛重:16kg

Technical Parameters

Voltage :110v-220v Power :480w
Light source :48 leds in red,green and blue, each 10w
Luminous Angle :25 degrees
Dimming :0-100% linear dimming
Stroboscopic: The stroboscopic speed is adjustable
Waterproof rating :IP65
Control mode :DMX512, self-driving,
master-slave, etc
Channel :8 channels Lamp body: Cast aluminum
Dimensions :15x22x40cm
Net weight :15kg Gross weight :16kg

SF-B009
LED24颗洗墙灯(3/4合1)
LED 24pcs Wall Washer (3/4in 1)





技术参数

电压:AC100-240V50/60Hz
LED:24pcs*10WRGBW 4in1
光束角:40°
最大功率:200W
寿命:60000HDMX通道:4/8CH
产品尺寸:1000x90x170mm
包装尺寸:1030x150x210mm
净重:6.4kg 毛重:16.5kg

Technical Parameters

Voltage:AC100-240V50/60Hz
LED:24pcs*10WRGBW 4in1 Beam Angle:40°
Maximum power:200W
Lifetime:60000HDMX Channel:4/8CH
Product Size:1000x90x170mm
Package Size:1030x150x210mm
Net Weight:6.4kg Gross Weight:16.5kg

SF-B005IP
单层星脉投光灯
Single-Layer Star Galaxy Effect Flood Light



技术参数

电压: AC100~240V 50/60Hz 功率: 400W LED
光源:44颗10W RGBW 色温: 2700K~10000K
控制方式: DMX512/自走/主从/声控
通 道: 4/8个DMX512控制通道可设定
工作温度: -20度~40度 灯珠寿命: 50000h
Ip等级: Ip65
净重: 7.9kg 毛重: 9.0kg
产品尺寸: 509*117*264mm
纸箱尺寸: 585*340*200mm

Technical Parameters

Voltage: AC100-240V, 50/60Hz Power: 400W
LED light source :44 pieces of 10W RGBW
Color temperature: 2700K - 10000K
Control mode: DMX512/ Self-propelled/
master-slave/Voice control
Channels: 4/8 DMX512 control channels can be set
Operating temperature: -20° to 40°
The lifespan of the lamp beads is 50,000 hours
IP rating: Ip65 Net weight: 7.9kg Gross weight: 9.0kg
Product size: 509*117*264mm
Carton size: 585*340*200mm

SF-B007
双层星脉投光灯
Double-Layer Star Galaxy Effect Flood Light



技术参数

电压: AC100~240V 50/60HZ
功率:800W LED光源:88颗10W RGBW
色温:2700K~10000K 频闪:独立电子频闪
控制方式: DMX512/自走/主从/声控
通道:4/8个DMX512控制通道可设定
工作温度:-20度~40度
连接方式: DMX512输入输出 / 电源输入输出
灯珠寿命:50000h
IP等级: Ip65 产品净重: 17.4KG
尺寸:524*117*472mm

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power :800W LED
Light source :88 pieces of 10W RGBW
Color temperature :2700K - 10000K
Control mode: DMX512/ Self-propelled/master-slave
/Voice control
Stroboscopic: Independent electronic stroboscopic
Channels :4/8 DMX512 control channels can be set
Operating temperature :-20 degrees to 40 degrees
The lifespan of the lamp beads is 50,000 hours
IP rating: Ip65 product Net weight: 17.4KG
Product size :524*117*472mm

SF-B008
LED18颗洗墙灯(4/6合1)
LED18pcs Wall Washer(4/6in 1)





技术参数

输入电压:AC100-240V50/60HZ
控制信号:DMX512.主从机,声控,自走
光源:18颗*10W/18W4合1(R/G/BN)
6合1(R/G/BNN/UV)
DMX通道:8/10通道
外观尺寸:1000x90x190mm
重量:5kg

Technical Parameters

Input voltage:AC100-240V50/60HZ
Control signal: DMX512. master-slave,
voice-activated, self-propelled
Light source: 18 * 10W/18W 4 in 1 (R / G / BN)
6 in 1 (R/G/BNN/UV)
DMX channel:8/10 channels
Appearance size:1000x90x190mm
Weight:5kg

SF-B010
LED18颗4合1防水洗墙灯
LED 18pcs 4in 1 Waterproof Wall Washer





技术参数

电压:AC100-240V 50/60HZ
光源:18pcs*10W 4in1
功率:200WPWM
调光频率:1KHZ
控制信号:DMX512控制 光束角:40度
产品尺寸:1000x88x170mm
包装尺寸:1060x325x235mm
毛重:26.2kg 毛重:26.2kg

Technical Parameters

Voltage:AC100-240V 50/60HZ
Light source:18pcs*10W 4in1 Power:200WPWM
Dimming frequency: 1KHZ
Control signal: DMX512 control
Beam angle: 40 degrees
Product Size:1000x88x170mm
Package Size:1060x325x235mm
Gross weight:26.2kg Gross weight:26.2kg

China2EU

影视灯系列

TV Light Series



SF-C001
LED300/400W成像灯
300/400W LED Profile Spot Light



技术参数
电源：AC100-250V，50 / 60Hz
最大功耗：200W
光学系统：六个特殊的玻璃光学镜片
色温：3200k-5700k
色温偏差：±5%
颜色：CRI≥Ra90%
手动调光：0-100%
发光角度：19° / 26° / 36° / 50°
控制系统：16位调光
STM32控制芯片，DMX512控制
通道数：3CH
重量：9.5KG

Technical Parameters
Power supply: AC100-250V, 50/60Hz
Maximum power consumption: 200W
Optical system: six special glass optical lenses
Color temperature: 3200k ~ 5700k
Color temperature deviation: ± 5%
Color: CRI≥Ra90%
Manual dimming: 0 ~ 100%
Light angle: 19 ° / 26 ° / 36 ° / 50 °
Control system: 16-bit dimming.
STM32 control chip, DMX512 control
Number of channels: 3CH
Weight: 9.5KG

SF-C002
LED200W成像灯
200W LED Profile Spot Light



技术参数
电源：AC100-250V，50 / 60Hz
光源：LED 200W
消耗功率：200W
控制通道：2 / 7CH，512控制信号
灯：白色，暖白
体积为sma11，相对lgtit高质量光学
系统不同的镜头是可选的
光束角：19° 26° 36° 50°
提供不同的镜头
净重：7.5kg

Technical Parameters
Power supply: AC100-250V, 50/60Hz
Optical source: LED 200W
Power consumption:200W
Control channel: 2/7CH,512 control signal
Lamp: white, warm white
volume is sma11,relatively lgtit High quality optical
system Different lenses are optional
Beam angle: 19 ° 26 ° 36 ° 50 °
Different lenses are available
Net weight: 7.5kg

SF-C020
LED300/200W威龙成像灯
300/200W LED Dragon Profile Spot Light



技术参数
输入电压：AC100-240V，50/60Hz
额定功率：200W/300W
光源：200W/300W高亮度LED
色温：3200K/5600K可选，2合1 显指：≥90
灯珠寿命：50000h 调光：0%-100%线性调光
光学角度：19°、26°、36°、50°可选
功能效果：柔光、聚光、截光 防护等级：IP20
控制模式：标准DMX512信号、自走、主从
通道数量：2（单色）/4（双色）个通道
产品尺寸：34×27×64cm 产品净重：8.6kg

Technical Parameters
Input voltage: AC100-240V, 50/60Hz
Rated power: 200W/300W
Light source: 200W/300W high-brightness LED
Color temperature: 3200K/5600K available, 2 in 1
Significant index: ≥90 Protection grade: IP20
The lifespan of the lamp beads is 50,000 hours
Dimming: 0%-100% linear dimming
Functional effects: Soft light, focused light,
and light interception Control mode: Standard DMX512
signal, self-propelled, master-slave
Product size: 34×27×64cm N.W: 8.6kg

SF-C004
LED300/200W高清成像灯
300/200W LED HD Profile Spot Light



技术参数
输入电压：AC110V-230
灯珠功率：300W大功率LED COB
总功率：300W
额定电流：1.5A
通道数：2通道。
色温：3200K/5600K
显色指数：Ra≥90
发光角度：19-40度手动调节
刷新频率：8000KHZ
照　度：15米照度450流明

Technical Parameters
Input voltage: AC110V-230
Lamp bead power: 300W high power LED COB
Total power: 300W
Rated current: 1.5A
Number of channels: 2 channels.
Color temperature: 3200K/5600K
Color rendering index: Ra≥90
Light-emitting angle: 19-40 degrees manual
adjustment
Refresh rate: 8000KHZ
Illumination: 15 meters illuminance 450 lumens

SF-C005
LED30W迷你成像灯
30W LED Mini Profile Spot Light



技术参数
电源：AC110-220V，50-60Hz
光源：30W COB
功率：30W（白色暖白）60W（RGB 3合1）
控制：自走，DMX512
净重：2.15kg
毛重：2.6kg
内包装：35*18*19cm
外包装：57*37*41cm

Technical Parameters
Power supply: AC110-220V, 50-60Hz
Light source: 30W COB
Power: 30W (white warm white) 60W (RGB 3 in 1)
Control: self-propelled, DMX512
Net weight: 2.15kg
Gross weight: 2.6kg
Inner packing: 35*18*19cm
Outer packing: 57*37*41cm

SF-C006
LED200W聚光灯
200W LED Spot Light



技术参数
电压：AC90V-120V 50Hz / 60Hz
光源：200W LED COB 1pcs
最大功耗：200W
色温：3200k-5700k
光学镜片：150mm非尼光学镜片
调光：0%-100%
手动变焦：14° -55°
控制系统：16位调光
STM32控制芯片DMX512
最大时钟频率：72MHz
通道数：3CH

Technical Parameters
Voltage: AC90V-120V 50Hz / 60Hz
Light source: 200W LED COB 1pcs
Maximum power consumption: 200W
Color temperature: 3200k ~ 5700k
Optical lens: 150mm nonnier optical lens
Dimming: 0% ~ 100%
Manual zoom: 14 ° ~ 55 °
Control system: 16-bit dimming,
STM32 control chip, DMX512
Maximum clock frequency: 72MHz
Number of channels: 3CH

SF-C007
LED300W聚光灯
300W LED Spot Light



技术参数
电压：AC 100-240V
功率：300W
总功率：350W
色温：3200K，可选5600K
角度：10-60°
控制信号：DMX512
频道：1CH
适用范围：舞台，会议，摄影

Technical Parameters
Voltage: AC 100-240V
Power: 300W
Total power: 350W
Color temperature: 3200K, optional 5600K
Angle: 10-60°
Control signal: DMX512
Channel: 1CH
To apply scope: stage, meeting, photography

SF-C008
LED31颗车展灯
31x LED Auto Show Light



技术参数
电压：AC110-220V，50-60HZ
功率：400W
光源：31 * 10W进口
基瑞灯珠
防护等级：IP20
尺寸：420 * 240 * 240mm
重量：8KG
使用场所：车展，会议等场所

Technical Parameters
Voltage: AC110-220V, 50-60HZ
Power: 400W
Light source: 31 * 10W imported
kirui lamp beads
Protection class: Ip20
Size: 420 * 240 * 240mm
Weight: 8KG
Use places: auto show, conference and other places

SF-C017
1080颗LED三基色柔灯
1080x LED Bi-Color Soft Panel Light





技术参数

电压:AC110-230V，50-60Hz
功率:200W
光源:LED5730 SMD灯珠832
控制方式:自发光(0DN0512信号)可调
光流明值:60-65cm
色温:3000K-3200K或6000-6500K
可选色值:85-9
2尺寸:57*36*18mm
重量:8.5kg

Technical Parameters

Voltage :AC110-230V, 50-60Hz
Power :200W
Light source :LED5730 SMD LED 832
Control mode: Self-luminous
(0DN0512 signal) adjustable
Lumen value :60-65cm
Color temperature :3000K-3200K or 6000-6500K
Selectable color values :85-9
2 Dimensions :57*36*18mm
Weight :8.5kg

SF-C010
600颗LED三基色柔光灯
600x LED Bi-Color Soft Panel Light





技术参数

电压:AC110-230V，50-60Hz
功率:160W
光源:LED5730贴片灯珠600
控制方式:自发光(DMX512信号)可调光
控制模式:自走式/声控/主从/DMX512
模式:高发光率高显色指数,色彩还原好,
具有高透光率的丙烯酸软灯杆,
光输出柔和均匀
尺寸:50x30.5x10cm
重量:5.84kg

Technical Parameters

Voltage :AC110-230V, 50-60Hz
Power :160W
Light source :LED5730 surface mount LED 600
Control mode: Self-luminous
(DMX512 signal), dimmable
Control mode: Self-propelled, voice-controlled,
master-slave, DMX512
Mode: High luminous rate and high color
rendering index, good color reproduction,
acrylic soft lamp post with high light transmittance,
soft and uniform light output
Size :50x30.5x10cm
Weight :5.84kg

SF-C011
432颗200WLED平板柔光灯
432PCS 200WLED TV Studio Soft
Flat Light





技术参数

电压:AC100-240V 50-60Hz
保险丝:1.5A
功率:>220W
色温:3200K-5600K(可调)
高流明:24000LM
灯珠5730:暖白色可选
频道:4CH
通讯协议:USITTDMX-512
特点:主/从机自动识别测试,
无限颜色的电子合成

Technical Parameters

Voltage :AC100-240V 50-60Hz
Fuse :1.5A Power :>220W
Color temperature :3200K-5600K(adjustable)
High lumen: 24,000 lm
Led 5730: Warm white is available Channel :4CH
Communication protocol :USITTDMX-512
Features: Automatic recognition and testing of
master and slave machines, electronic synthesis of
unlimited colors

SF-C018
272颗LED平板柔光灯
272x LED Slim Panel Soft Light





SF-C013
432颗LED平板柔光灯（手动调节）
432x LED Panel Soft Light
(Manual Dimming)



SF-C014
256颗LED平板柔光灯（手动调节）
256x LED Panel Soft Light
(Manual Dimming)



SF-C019
256颗LED面光灯
256Pcs LED Panel Lights





技术参数

电压:AC100-240V 50-60Hz
保险丝:1.5A功率:>180W
光源:5730 SMD灯珠;
色温:3200K-5600K((可选))
高流明:24000LM灯珠贴片
灯珠5730:暖白272 频道:3CH
通讯协议:USITTDMX-512
调光:0-100%线性调光，光滑无闪烁

Technical Parameters

Voltage :AC100-240V 50-60HZ Fuse :1.5A
Power :>180W
Light source :5730 SMD LED beads
Color temperature :3200K-5600K(optional)
High lumen: 24,000 LM, surface mount
LED 5730: Warm white 272
Channel :3CH
Communication protocol :USITTDMX-512
Dimming :0-100% linear dimming,
smooth and flicker-free

技术参数

电压:AC100-240V 50-60HZ
保险丝:1.5A 功率:>220W
光源:5730 SMD灯珠
色温:3200K-5600K((可选))
高流明:24000LM,
通道:4CH 通讯协议:USITTDMX-512
调光:0-100%线性调光平滑无闪烁
特点:主/从机自动识别测试

Technical Parameters

Voltage :AC100-240V 50-60HZ Fuse :1.5A
Power :>220W
Light source :5730 SMD LED beads
Color temperature :3200K-5600K(optional)
High lumen: 24,000 lm Channel :4CH
Communication protocol :USITTDMX-512
Dimming :0-100% linear dimming,
smooth and flicker-free
Feature: Automatic recognition test for
master/slave machines

技术参数

电压:AC100-240V 50-60HZ
保险丝:1.5A 功率:>180W
光源:5730 SMD灯珠
色温:3200K-5600K((可选))
高流明:24000LM
灯珠SMD灯珠5730:暖白256频道:3CH
通讯协议:USITTDMX-512
调光:0-100%线性调光平滑无闪烁
特点:主/从机自动识别测试

Technical Parameters

Voltage :AC100-240V 50-60HZ Fuse :1.5A
Power :>180W Light source :5730 SMD LED beads
Color temperature :3200K-5600K(optional)
High lumen: 24,000 lm
SMD LED 5730: Warm white 256
Channel :3CH
Communication protocol :USITTDMX-512
Dimming :0-100% linear dimming,
smooth and flicker-free
Feature: Automatic recognition test for
master/slave machines

技术参数

输入电压:AC100-240V，50/60Hz
消耗功率:100WLED
数量:272PCS MSD5730 0.5W LED
(CW:216个，WW:216个)
控制信号:DMX512，主从，自动模式
控制通道:4CH DMX512通道
净重:5.5kg
毛重:6.5kg
产品尺寸:580*335*80mm
包装尺寸:645(D)*390(W)*150(H)mm

Technical Parameters

Input voltage :AC100-240V, 50/60Hz
Power consumption :100WLED
Quantity :272 pieces MSD5730 0.5W LED
(CW:216, WW:216)
Control signal :DMX512, master-slave,
automatic mode
Control channel :4CH DMX512 channel
Net weight :5.5kg Gross weight :6.5kg
Product size :580*335*80mm
Packaging size :645(D)*390(W)*150(H)mm

China2EU

频闪灯系列

Strobe Light Series



SF-S1000IPY
LED1000W摇头防水频闪灯
1000W LED Moving Head IP65 Strobe Light





技术参数


光源: 5050 1.5W RGB 3in1
数量: 480 颜色: RGB
段数: 8 段 (2 x 4) 白光频闪-中间段
光源: 3535 5W 6500K LEDs
数量: 144*5W 白光 颜色:冷白
段数: 4 段 Y 轴选择(角度): 185°
通道模式: 7/14/ 42/15/44 通道模式
控制方式: 标准 DMX-512, RDM
调光: 0-100% 线性调光
频闪频率: 20Hz 额定功率: 1000W
额定电压: 100-240V AC / 50-60Hz
最大环境温度: -30°C/86°F, 50°C/122°F

Technical Parameters

Light source: 5050 1.5W RGB 3in1 Quantity: 480
Color: RGB Light source: 3535 5W 6500K LEDs
Number of segments: 8 segments (2 x 4)
white light stroboscopic - middle segment
Quantity: 144*5W white light
Colour: Cold white Number of paragraphs: 4
Y-axis selection (Angle): 185°
Channel mode: 7/14/42/15/44 channel mode
Control mode: Standard DMX-512, RDM
Dimming: 0-100% linear dimming
Stroboscopic frequency: 20Hz
Rated voltage: 100-240V AC / 50-60Hz
Rated power: 1000W
Maximum ambient temperature:
-30°C / 86°F, 50°C / 122°F

SF-S009IP
LED方形防水频闪灯
Square LED IP65 Strobe Light





技术参数

电压: AC100-240V 50/80HZ
功率: 400W 外观: 金属、黑色
灯珠: 1344颗5050三色LED灯珠
控制方式: DMX512、自走、主从、
声控、带RDM功能
通道: CH03、CH07、CH72
调光: 32bit 0-100%线性调光
特点: 12+12段跑马+染色+爆闪
工作温度: -30°-50
连接方式: DMX512输入输出/
电源输入输出
频闪频率: 1-30-Z IP等级: IP65

Technical Parameters

Voltage: AC100-240V 50/80HZ
Power: 400W
LED beads: 1,344 5050 three-color LED beads
Control mode: DMX512, self-propelled,
master-slave, voice control, with RDM function
Channels: CH03, CH07, CH72
Dimming: 32-bit 0-100% linear dimming
Features: 12+12 segments of horse running
+ coloring + flash
Operating temperature: -30° C to 50 ° C
Stroboscopic frequency: 1-30-Z
Appearance: Metallic, black
Connection method: DMX512 input/output/
power input/output, IP rating: IP65

SF-S010IP
LED24段防水频闪灯
24-Section LED IP65 Strobe Light






技术参数

电压:AC100~240V50/60HZ
功率:32V/450W
灯珠1344颗5050RGBLED
灯珠控制方式:DMX512/自走/主从/
声控/带RDM功能
通道:CH3、CH09、CH72
线性调光特点: 24段单点控制
工作温度:-30度~50度
频闪频率:1~30HZ
连接方式:DMX512输入输出/
电源输入输出
IP等级:IP65

Technical Parameters

Voltage :AC100-240V 50/60Hz
Power :32V/450W
1,344 LED beads, 5050RGBLED
Lamp bead control mode :DMX512/
self-propelled/master-slave /
Voice control/with RDM function
Channels :CH3, CH09, CH72
Linear dimming feature: 24-segment
single-point control
Operating temperature :-30° to 50 °
Stroboscopic frequency :1 to 30HZ
Connection method :DMX512 input/output
Power input/output IP rating :IP65

SF-S011IP
64段+48段(3条白光)防水方频闪灯
64+48 Section LED IP65 Square Strobe Light (3 White Light Bars)

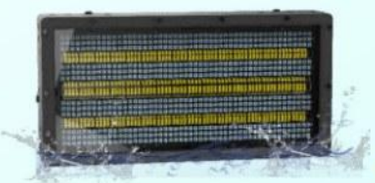



技术参数

电压: AC100~240V 50/60HZ
功率: 500W 灯珠: 576颗5050-3合1
(RGB)-0.5W,512颗3030-单色(W)-3W
控制方式: DMX512/自走/主从/声控/
手动/带 RDM 功能
调光: 16bit 0~100%线性调光
特点: 防水+点控+跑马+爆闪+染色
工作温度: -30°~50° 频闪频率: 1~30Hz
连接方式: DMX512 输入输出
/电源输入输出
IP 等级: IP67

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 500W
Led beads: 576 5050-3 in 1(RGB)-0.5W,
512 3030- single color (W)-3W
Control mode: DMX512/ Self-propelled/master-slave/
Voice control/Manual/with RDM function
Dimming: 16-bit 0~100% linear dimming
Features: Waterproof + point control + horse racing +
flash + dyeing
Operating temperature: -30° C to 50° C
Flicker frequency: 1 to 30Hz
Connection method: DMX512 input/output
/power input/output
IP rating: IP67

SF-S012
LED12+12段摇头频闪灯
12+12 Section LED Moving Head Strobe Light





技术参数

电压: AC100-240V 50/60HZ
功率: 250W
灯珠: RGB灯珠864颗, W灯珠96颗
控制方式: DMX512/自走/主从/
声控/带HDM功能
通道: CH8、CH20、CH52
调光: 32bit 0-100%线性调光
特点: 爆闪+染色+效果+摇头
工作温度: -30°-50°
频闪频率: 1-30HZ
连接方式: DMX512输入输出/
电源输入输出 IP等级: IP20

Technical Parameters

Voltage: AC100-240V 50/60HZ Power: 250W
Led beads: 864 RGB led beads
and 96 W led beads
Control mode: DMX512/ Self-propelled/Main/
Voice control/with HDM function
Channels: CH8, CH20, CH52
Dimming: 32-bit 0-100% linear dimming
Features: Flash + dyeing + effect + shaking head
Operating temperature: -30°to-50°
Stroboscopic frequency: 1-30HZ
Connection method: DMX512 input/output/
power input/output IP rating: Ip20

SF-S013
96+32段频闪灯
96+32 Section LED Strobe Light





技术参数

电压:AC100-240V 50/60HZ
功率:350W (RGB:130WW:220W
灯珠:256颗3030白光iW884颗
5050 HGB0.2W灯珠
控制方式:DMX512、自走、主从、
声控、带FDM功能
通道:CH04.CH17、CH145
调光:32bit0-100%线性调光
特点:96段RGB+32段W+染色+螺闪
工作温度:-30°-60° 频闪频率:1-30Hz
连接方式:DMX512输入输出/
电源输入输出 IP等级:IP20

Technical Parameters

Voltage: AC100-240V 50/60HZ Power: 350W
(RGB:130W, W:220W Led beads: 256 3030 white IW,
884 5050 HGB0.2W led beads
Control mode: DMX512, self-propelled, master-slave,
voice control, with FDM function
Channels: CH04, CH17, CH145
Dimming: 32-bit 0-100% linear dimming
Features: 96-segment RGB + 32-segment W +
coloring + screw-flash
Operating temperature: -30° C to 60° C
Stroboscopic frequency: 1-30HZ
Connection method: DMX512 input/output/power
input/output IP rating: IP20

SF-S014
120段频闪灯
120-Section LED Strobe Light






技术参数


电压：AC110-240V±10%/50-80HZ
功率：260W 机箱：铝
色澜：6500-7600K 灯珠型号：5050
发光颜色：RGB
光源寿命：50000小时以上
调光：0-100%线性调节
灯珠颗数：1080颗×0.5W贴片灯珠
频闪：1-30Hz常规频闪，甜机顺闪，脉冲频闪
控制方式:DMX512,主/从,声控,
单机,自走通道：3/12/360CH

Technical Parameters

Voltage: AO110-240V± 10%/50-80HZ Power: 260W
Chassis: Aluminium Color: 6500-7600K
Led bead model: 5050 Luminescent color: RGB
Light source lifespan: over 50,000 hours
Dimming: 0-100% linear adjustment
Number of LED beads: 1080 ×0.5W
surface mount LED beads
Stroboscopic effect: 1-30Hz conventional
Control mode: DMX512, master/slave,
voice control, single machine, self-driving
Channel: 3/12/360CH

SF-S015
960颗48+8段频闪灯
960x LED 48+8 Section Strobe Light





技术参数

电压: AC100~240V 50/60HZ
功率: 120W
灯珠: 768颗RGB灯珠，96颗W灯珠
控制方式: DMX512/自走/主从/
带 RDM 功能 通道: CH4/CH15/CH152
调光: 16bit 0~100%线性调光
特点: 跑马+爆闪
工作温度: -30 度~50 度
频闪频率: 1~30HZ 外观: 金属、黑色
连接方式: DMX512 输入输出/
电源输入输出
IP 等级: IP20

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 120W
Led beads: 768 RGB LED beads, 96 W led beads
Control mode: DMX512, self-propelled, master-slave,
with RDM function
Channels: CH4, CH15, CH152
Dimming: 16-bit 0~100% linear dimming
Features: Horse racing + explosive dodging
Operating temperature: -30 degrees to 50 degrees
Stroboscopic frequency: 1 to 30HZ
Appearance: Metallic, black
Connection method: DMX512 input/output/
power input/output
IP rating: IP20

SF-S016
960颗8段频闪灯
960x LED 8-Section Strobe Light





技术参数

电压:AC110-240V 50/60Hz 功率:200W
灯珠:960颗5050三色LED灯珠
控制方式:DMX512/自走/主从/
带RDM功能
通道:CH08、CH24 外观:金属、黑色
调光:32bit 0-100%线性调光
特点:8段跑马+染色+爆闪
工作温度:-30°-50°
频闪频率:1-30-Hz
连接方式:DMX512输入输出/
电源输入输出
Ip等级:IP20重量:4kg

Technical Parameters

Voltage :AC110-240V 50/60Hz Power :200W
LED beads :960 5050 three-color LED beads
Control mode :DMX512/ Self-propelled/
master-slave/with RDM function
Channel :CH08, CH24
Appearance: Metal, black
Dimming: 32-bit 0-100% linear dimming
Features: 8-dan horse race + dyeing + flash
Operating temperature :-30° C to 50° C
Strobe frequency :1-30-Hz
Connection method :DMX512 input/output/
power input/output
Ip rating :IP20
Weight :4kg

SF-S017
24颗雷幕灯
24x LED Laser Curtain Light





技术参数


电压: AC100~240V 50/60HZ
电源功率: 24V/260W
灯珠: 384 颗 5050RGB 0.3w
24 颗 3535 白(金黄)光 5W
256 颗 5730 白光 0.2W
控制方式: DMX512/自走/主从/声控/RDM
通道: CH05/CH11/CH112
调光: 32bit 0~100%线性调光
特点: 单点单控 工作温度: -30°~50°
频闪频率: 1~30Hz
连接方式: DMX512 输入输出/
电源输入输出

Technical Parameters

Voltage: AC100-240V, 50/60HZ
Power supply capacity: 24V/260W
Led beads: 384 5050RGB 0.3w/24 3535 white (golden)
5W/256 5730 white 0.2W
Control mode: DMX512/ Self-propelled/master-slave/
Voice control /RDM
Channel: CH05/CH11/CH112
Dimming: 32-bit 0~100% linear dimming
Feature: Single point and single control
Operating temperature: -30° C to 50° C
Stroboscopic frequency: 1 to 30Hz
Connection method: DMX512 input/output/
power input/output

SF-S018IP
LED12+12段摇头频闪灯
12+12 Section LED Moving Head
Strobe Light





技术参数


电压: AC100~240V 50/60Hz
功率: 500W 特点: 跑马+爆闪
灯珠: 672颗5050-RGB 0.3W,
112颗3030-白光 3W
控制方式: DMX512、自走、主从、
声控、带RDM功能
调光: 16bit 0~100%线性调光
工作温度: -30°C ~ 50°C
频闪频率: 1~30Hz 外观: 金属/黑色
连接方式: DMX512输入输出 /
电源输入输出
IP等级: IP67

Technical Parameters

Voltage: AC100-240V, 50/60Hz Power: 500W
Features: Horse racing + explosive dodging
Led beads: 672 5050-RGB 0.3W, 112 3030- white 3W
Control mode: DMX512, self-propelled,
master-slave, voice control, with RDM function
Dimming: 16-bit 0~100% linear dimming
Operating temperature: -30°C to 50°C
Stroboscopic frequency: 1 to 30Hz
Appearance: Metallic/black
Connection method: DMX512 input/
output/power input/output IP rating: IP67

SF-S019IP
LED32+16段防水频闪灯
32+16 Section LED Waterproof
Strobe Light





技术参数

电压: AC100~240V 50/60HZ
功率: 340W 频闪频率: 1~30HZ
灯珠: 230颗1W白光，460颗0.3W RGB
控制方式: DMX512、自走、主从
带RDM功能
调光: 32bit 0~100%线性调光
特点: 32+16段跑马+染色+爆闪
工作温度: -30°C ~ 50°C
外观: 金属、黑色
连接方式: DMX512输入输出/
电源输入输出
IP等级: Ip68

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 340W
Stroboscopic frequency: 1 to 30HZ
Led beads: 230 pieces of 1W white light,
460 pieces of 0.3W RGB
Control mode: DMX512, self-propelled,
master-slave with RDM function
Dimming: 32-bit 0~100% linear dimming
Features: 32+ 16-segment horse running +
dyeing + flash
Operating temperature: -30°C to 50°C
Appearance: Metallic, black
Connection method: DMX512 input/output
Power input/output IP rating: IP68

SF-S020IP

LED防水长条频闪（带电子雾化）
LED Waterproof Linear Strobe Light (with Electronic Frost)





技术参数

彩光:672 x 0.5W RGB LED
白光:112 x 3W CW LED
彩光光束角度:101° 白光光束角度:108°
彩光光斑角度:149°白光光斑角度:152°
彩光32区可单独控制
白光16区可单独控制
卓越的混色功能
强劲高输出的频闪效果
内置拼接插销，可实现快速拼接对位
电子雾化效果
0-100%顺滑调光功能

Technical Parameters

Color light :672 x 0.5W RGB LED
White light :112 x 3W CW LED
Color light beam Angle :101°
White light beam Angle :108°
Color light spot Angle :149°
White light spot Angle :152°
The 32 zones of color light can be controlled separately
The white light zone 16 can be controlled independently
Outstanding color-mixing function
Electronic atomization effect
0-100% smooth dimming function

SF-S021

LED长条48+24段频闪灯
48+24 Section LED Linear Strobe Light





技术参数

输入功率：MAX130W;
光源参数：480颗0.2W 5050RGB3合1灯珠,
240颗0.5W 5730白光灯珠;
控制方式：DMX512、RDM、声控、自走、主从控制;
通道模式：4/16/88/168通道

Technical Parameters

Input power: MAX130W
Light source parameters:
480 0.2W 5050RGB 3-in-1 led beads,
240 0.5W 5730 white led beads;
Control mode: DMX512, RDM, voice control, self-propelled, master-slave control;
Channel mode: 4/16/88/168 channels

SF-S022

LED 长条16段频闪灯
16-Section LED Linear Strobe Light





技术参数

电压:AC100~240V50/60Hz
功率:24V/200W
灯珠1296颗;16段RGB
灯珠控制方式:DMX512、自走、主从、声控、带RDI功能
通道:CH3、CH10、CH48
线性调光特点:16段控制
工作温度:-30°~50° 频闪频率:1~30HZ
连接方式:DMX512输入输出/电源输入输出
IP等级:IP20

Technical Parameters

Voltage :AC100-240V50/60Hz Power :24V/200W
1,296 LED beads; 16-segment RGB
Lamp bead control mode :DMX512, self-driving, master-slave, voice control, with RDI function
Channels :CH3, CH10, CH48
Linear dimming features: 16-segment control
Operating temperature :-30° C to 50° C
Stroboscopic frequency :1 to 30HZ
Connection method :DMX512 input/output/power input/output
IP rating :IP20

SF-S023

LED长条216像素灯
216-Pixel LED Linear Light





技术参数

电压：AC100-240V 50/60HZ
功率：150%
灯珠：884颗5050三色LED灯珠
控制方式：DMX512、自走、主从、声控、带ROM功能
通道：C003、C8,C220
调光：32bit 0-100%线性调光
特点：216段跑马+染色+爆闪
工作温度：-30°-50°
频闪频率：1-30Hz 外观：金属/黑色
连接方式：DMX512输入输出/电源输入输出 IP等级：IP20

Technical Parameters

Voltage: AC100-240V 50/60HZ Power: 150%
LED beads: 884 5050 three-color LED beads
Control mode: DMX512, self-propelled, master-slave, voice control, with ROM function
Channels: C003, C8,C220
Dimming: 32-bit 0-100% linear dimming
Features: 216-segment horse racing + coloring + flash
Operating temperature: -30° C to 50° C
Stroboscopic frequency: 1-30HZ
Appearance: Metallic, black
Connection method: DMX512 input/output /power input/output
IP rating: IP20

SF-S024

LED 666颗长条频闪灯
666x LED Linear Strobe Light





技术参数

电压:AC100~240V50/60Hz
功率:5V/130W
灯珠:5050RGB(0.25w)666颗灯珠
控制方式:DMX512、自走、主从、声控、带RDM功能
通道:CH3、CH9、CH22
线性调光特点:666颗单点
工作温度:-30°~50°
频闪频率:1 -30Hz
连接方式:DMX512输入输出/电源输入输出
IP等级:IP20

Technical Parameters

Voltage :AC100-240V50/60Hz Power :5V/130W
Led beads :5050RGB(0.25w), 666 LED beads
Control mode :DMX512, self-propelled, master-slave, voice control, with RDM function
Channels :CH3, CH9, CH22
Linear dimming feature :666 single points
Operating temperature :-30° C to 50° C
Stroboscopic frequency :1 -30Hz
Connection method :DMX512 input/output/power input/output
IP rating :IP20

SF-S025

14颗长条变色龙
14x LED Linear Color-Changing Light





技术参数


电压：AC100~240V 50/60HZ
功率：45W 工作温度：-30°~50°
灯珠：56颗5050灯珠 + 14白色LED灯珠
控制方式：
DMX512/自走/主从/声控/RDM
通道：CH10、CH24、CH56
调光：32bit 0~100%线性调光
特点：染色+爆闪+变色龙+20个自走模式
频闪频率：1~30HZ 外观：金属、黑色
连接方式：DMX512输入输出 /
电源输入输出 IP 等级：IP20

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 45W
LED beads: 56 5050 LED beads + 14 white LED beads
Control mode: DMX512, self-propelled, master-slave, voice control, RDM
Channels: CH10, CH24, CH56
Dimming: 32-bit 0~100% linear dimming
Features: Dyeing + Flash + chameleon + 20 self-propelled modes
Operating temperature: -30° to 50°
Stroboscopic frequency: 1 to 30HZ
Appearance: Metallic, black
Connection method: DMX512 input/output/power input/output. IP rating: IP20

SF-S026
12颗三合一长条矩阵频闪灯
12x LED 3-in-1 Linear Matrix Strobe Light





技术参数

输入电源：100~240V AC 50~60Hz
开关电源：12V/100W
LED光源：12颗3W暖白点控，
13段156颗5730 16段96颗全彩
RGB染色光源
控制方式：标准DMX512协议，
内置20个效果程序，带声控自走模式；
声控效果极佳
光束角度：6度 辐射范围：8度
带RDM控台调地址码功能
带手机调地址玛及手机控制功能接口

Technical Parameters

Input power supply: 100-240V AC 50-60Hz
Switching power supply: 12V/100W
LED light source: 12 pieces of 3W warm white dot control, 13-segment 156 pieces of 5730, 16-segment 96 pieces of full-color RGB color light source
Control mode: Standard DMX512 protocol, with 20 built-in effect programs and voice-controlled self-propelled mode.
The voice control effect is excellent
Beam Angle: 6 degrees Radiation range: 8 degrees
It is equipped with the function of adjusting the address code of the RDM console
It is equipped with a mobile phone address adjustment interface and a mobile phone control function interface

SF-S027
36颗长条光幕灯
36x LED Linear Curtain Light





技术参数

电源:AC90V-240V 50/60Hz
功率:100W 光束角度:4°
调光:0%-100%线性调光
频闪:1-25次/秒或随机 数量:36颗灯珠
灯珠功率:3535灯珠*3瓦RGB
DMX接头:3Pin XLR 通道模式:7CH
操作模式:DMX512/自动/声控
特点：光束点控效果 产品净重：2.4kg
产品尺寸：102*13*7/cm
单包尺寸：104*13*15/cm
外包尺寸：105*29*33/cm（一装四）

Technical Parameters

Power supply :AC90V-240V 50/60Hz
Power :100W Beam Angle :4°
Dimming :0%-100% linear dimming
Stroboscopic effect :1-25 times per second or random
Quantity :36 lamp beads
Led power :3535 LED *3 watts RGB
DMX connector: 3-pin XLR Channel mode :7CH
Operation mode :DMX512/ Automatic/Voice control
Feature: Beam point control effect
Net weight of the product: 2.4kg
Product size: 102*13*7/cm
Single package size: 104*13*15/cm
Outer dimensions: 105*29*33/cm (one pack for four)

SF-S028
圈控频闪灯
LED Ring Control Strobe Light (Multi-Zone Control)





技术参数

电压：AC90-240V,50-60Hz
功率：150W
光源：325颗LED 全彩
外壳颜色：黑色
控制方式：声控 自走 DMX512 曝光
跑马流水 呼吸灯
重量：2.9kg
产品尺寸：30×12×23cm

Technical Parameters

Voltage: AC90-240V,50-60Hz
Power: 150W
Light source: 325 full-color leds
Shell color: Black
Control mode: Voice-controlled self-propelled DMX512 exposure
Running horse and flowing water breathing light.
Weight: 2.9kg
Product size: 30×12×23cm

SF-S029
30颗雷幕频闪灯
30x LED Laser Curtain Strobe Light





技术参数

电压: AC100~240V 50/60HZ 功率: 400W
灯珠: 30颗3535暖白10W，
600颗5050 RGB 0.3W灯珠
控制方式: DMX512、自走、主从、
声控、带RDM功能 特点: 染色+爆闪
调光: 32bit 0-100%线性调光
工作温度: -30°C ~ 60°C IP等级: Ip20
频闪频率: 1-30Hz 外观: 金属、黑色
连接方式: DMX512输入输出/电源输入输出

Technical Parameters

Voltage: AC100-240V, 50/60HZ Power: 400W
Led beads: 30 3535 warm white 10W, 600 5050 RGB 0.3W LED beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
Dimming: 32-bit 0-100% linear dimming
Features: Dyeing + flash
Operating temperature: -30°C to 60°C
Stroboscopic frequency: 1-30Hz
Appearance: Metallic, black
Connection method: DMX512 input/output/ power input/output IP rating: Ip20

SF-S030
LED 平板摇头频闪灯
LED Panel Moving Head Strobe Light





技术参数

光源: 441 x 0.2W RGB LED
光束角度: 120° 光斑角度: 160°
额外安装雾化片（选配）
0-100%顺滑调光功能
灯具尺寸:272*242*248mm
净重: 4.5 kg (9.9 lbs)
纸箱尺寸:375*335*360mm
重量: 6.1 kg (13.4 lbs)
(含纸箱，1装1 标准)

Technical Parameters

Light source: 441 x 0.2W RGB LED
Beam Angle: 120° Spot Angle: 160°
Additional installation of atomization plates (optional)
0-100% smooth dimming function
Lamp size :272*242*248mm
Net weight: 4.5kg (9.9lbs
Carton size :375*335*360mm
Weight: 6.1kg (13.4lbs)(including carton, 1 pack per standard)

SF-S006
200W LED频闪灯
200W LED Strobe Light





技术参数

电压:AC 100-240V，50/60Hz
功率:220W
光源:8*25W白光LED
控制模式:DMX512，声音激活，
自动，主从
DMX频道:2CH
环境:室内
尺寸:370x140x90mm
重量:2.3kg

Technical Parameters

Voltage :AC 100-240V, 50/60Hz
Power :220W
Light source :8*25W white LED
Control mode :DMX512, sound activated, automatic, master-slave
DMX Channel :2CH
Environment: Indoor
Dimensions :370x140x90mm
Weight :2.3kg

SF-S008
60W卫士频闪灯
LED 60W Strobe Light





技术参数

电压:AC 100-240，50-60Hz
功率:80W
光源:LED大功率20W*3星
功能:自行推进，语音启动，
可调频闪速度，DMX
装箱尺寸:35*24*18cm
重量:1.5kg

Technical Parameters

Voltage :AC 100- 240,50 -60Hz
Power :80W
Light source :
LED with high power of 20W*3 stars
Functions: Self-propelled, voice start, adjustable stroboscopic speed, DMX
Box size :35*24*18cm
Weight :1.5kg

追光灯系列

Follow Spot Light Series



SF-F001
2500W机械追光灯
2500W Mechanical Follow Spot Light



技术参数
电压：AC220V，50Hz
保险：20A
功率：3000W
灯泡：HMI2500W 4色+白色;手动截止灯焦点和光圈变化
光束角：15°，投影距离达到100米；
纸箱包装尺寸：1450x400x480mm + 430x490x390mm
净重：35 + 25kg
毛重：37 + 28kg
包装尺寸：1350*470*570mm
净重：60kg
毛重：92kg

Technical Parameters
Voltage: AC220V, 50Hz
Insurance: 20A
Power: 3000W
Bulb: HMI2500W 4 colors + white; manually cut off the focus and aperture change of the lamp. Beam angle: 15°, projection distance up to 100 meters;
Carton packaging size: 1450x400x480mm + 430x490x390mm
Net weight: 35 + 25kg
Gross weight: 37 + 28kg
Packing size: 1350*470*570mm
Net weight: 60kg
Gross weight: 92kg

SF-F002
440WLED追光灯
440W LED Follow Spot Light



技术参数
电压：AV220-240V，50-60Hz
功率：440W
光源：LED大功率光源
冷却系统：高强度空气冷却
颜色：跑步者6种颜色； 色温可调
图案：可定制LOGO图案；
控制模式：独立模式
光圈效果：光圈大小可调； 双重焦点
防护等级：IP20
尺寸：85 * 28 * 28cm
重量：约16kg

Technical Parameters
Rated voltage: AV220-240V; 50- 60Hz
Power: 440w
Light source: LED high power light source
Cooling system: high intensity air cooling
Color: 6 colors of a runner; adjustable color temperature
Pattern: LOGO pattern can be customized; additional charge
Control mode: stand-alone mode
Aperture effect: adjustable aperture size; dual focus
Protection level: ip20 protection level
Product size: 85*28* 28cm
Product weight: about 16kg

SF-F003
230W追光灯
230W Follow Spot Light



技术参数
供电电压：AC220V 240V，50Hz / 60Hz
消耗功率：230W
灯泡规格：欧司朗330W气体放电灯
颜色：色轮4色+白色，图案可以定做
控制信号：自制信号
光学系统：组合高精度石英非球面镜片
频闪：1-7次/秒频闪
色彩校正：正常5600K，6000K，3200K
光速距离：10-25m
发光角度速度：23°
重量：包括航空箱15Kg

Technical Parameters
Power supply voltage: AC220V-240V, 50Hz / 60Hz
Power consumption: 230W
Bulb specification: Osram 330W gas discharge lamp
Color: color wheel 4 colors + white, patterns can be customized
Control signal: self-made signal
Optical system: combined high-precision quartz aspheric lens
Strobe: 1-7 times/second strobe
Color correction: normal 5600K, 6000K, 3200K
Speed of light distance: 10-25m
Beam angle speed: 23°
Weight: 15Kg including flight case

SF-F004
5R/7R光束追光
5R/7R Beam Follow Spot Light



技术参数
电压：AC220V，50Hz
灯功率：5R / 7R
消耗功率：450W
功能：手动对焦，光圈，闪光灯
纸箱包装尺寸：
60.5 * 29 * 24cm + 64 * 15.5 * 16cm
毛重：15kg
特点：体积小，重量轻，易于安装。
非常适合举行婚礼，中小型表演，T秀。

Technical Parameters
Voltage: AC220V, 50Hz
Lamp power: 5R / 7R
Power consumption: 450W
Functions: manual focus, aperture, flash
Carton packaging size:
60.5 * 29 * 24cm + 64 * 15.5 * 16cm
Gross weight: 15kg
Features: small size, light weight, easy to install.
Very suitable for weddings, small and medium-sized performances, T shows.

SF-F005
5R追光灯
5R Follow Spot Light



技术参数
电压:AC100-240V 50/60Hz
光源:5R 200W/7R 230W
消耗功率:450W
颜色:白色，红色，绿色，黄色，蓝色
功能:对焦，光圈，频闪
纸箱包装尺寸:68*29*25cm
支架包装尺寸:95.5*15.5*16cm
净重:13.5kg毛重:15.5kg

Technical Parameters
Voltage:AC100-240V 50/60Hz
Light source:5R 200W/7R 230W
Power consumption:450W
Color: white, red, green, yellow, blue
Function:Focus,Aperture,Strobe
Carton package size:68*29*25cm
Packing size of bracket:95.5*15.5*16cm
Net weight:13.5kg Gross Weight:15.5kg

SF-F006
5R200W/7R230W机械追光灯
5R 200W / 7R 230W Mechanical Follow Spot Light



技术参数
电压:AC220V 50Hz
灯功率:5R 200W/7R230W
消耗功率:450W
功能:手动对焦，光圈，闪光灯
纸箱包装尺寸:60.5*29*24cm+64*15.5*16cm
毛重:15kg
特点:体积小，重量轻，易于安装，
非常适合举行婚礼，中小型表演，T秀

Technical Parameters
Voltage:AC220V 50Hz
Lamp power:5R 200W/7R230W
Power consumption:450W
Function: manual focus, aperture, flash
Carton packing size:60.5*29*24cm+64*15.5*16cm
Gross Weight:15kg
Features: small size, light weight, easy to install, ideal for weddings, small and medium-sized performances, T show

SF-F007
330WLED追光灯
330W LED Follow Spot Light



技术参数
电压:AC220V，50Hz
灯泡功率:一个330W LED
消耗功率:500W
功能:手动对焦，光圈，闪光灯
重量:12kg
特点:体积小，重量轻，操作简便,很适合婚礼，小型表演台服务

Technical Parameters
Voltage:AC220V,50Hz
Lamp power:a 330W LED
Power consumption:500W
Function:Manual focus, aperture, flash
Weight:12kg
Features: small size, light weight, easy to operate. Very suitable for weddings, small performance stage service

SF-F008
迷你追光灯
Mini Follow Spot Light



技术参数
电源:AC220V+5%，50Hz
灯泡:迷你追光灯
功率:800W
控制通道:4通道
电机数:4
包装尺寸:1210*440*300mm
重量:29KG(机体)4KG(电源)

Technical Parameters
Power:AC220V+5%, 50Hz
Bulb:Mini chasing light
Power:800W
Control channel: 4 channels
Number of motors:4
Package Size:1210*440*300mm
Weight:29KG(body)4KG(power supply)

SF-F009
10W 三合一聚光灯
10W 3-in-1 Spotlight



技术参数
电压:110-220V/50-60HZ
功率:10瓦
颜色:红 绿 蓝 七彩渐变
尺寸:50x70x120x145mm
底座x高度x横向
模式:插电即亮
用途:人物照射 玻璃球照射等

Technical Parameters
Voltage:110-220V/50-60HZ
Power:10W
Color:red green blue color gradient
Size:50x70x120x145mm
Base x Height x Horizontal
Mode:Plug in and light up
Usage: character irradiation glass ball irradiation, etc.

China2EU


舞台特效系列

Stage Effects Series



SF-D001

3000W单头/双头水雾机
3000W Single/Double Head Fog Machine





技术参数

电压：110V 60HZ / 220V 50HZ
控制：数字显示，远程控制，控制台控制
耗材：水雾油，普通自来水，
水温在25-40度为宜
占地面积：约100平方英尺
DMX频道：2CH
重量：47KG
尺寸：960 * 490 * 540mm

Technical Parameters

Voltage: 110V 60HZ / 220V 50HZ
Control: Digital display, remote control, console control
Supplies: water mist oil, ordinary tap water, water temperature at 25-40 degrees suitable
Cover area: about 100 square feet
DMX channel: 2CH
Weight: 47KG
Size: 960 * 490 * 540mm

SF-D002

3000W烟机
3000W Smoke Machine





技术参数

电压：AC 110 / 230V 50-60Hz ± 10%
功率：3000W
预热时间：12分钟
烟油容量：10升；
喷雾距离：20米
烟罩：40000cu.ff / min
控制方式：定时定量/DMX512控制
总重量：11.3公斤
净重：9.2kg
产品尺寸：72 × 28 × 26cm
装箱尺寸：74 × 38 × 30cm

Technical Parameters

Voltage: AC 110 / 230V 50-60Hz ± 10%
Power: 3000W
Warm-up time: 12 minutes
Smoke oil capacity: 10 liters;
Spray distance: 20 meters
Smoke cover: 40000cu.ff / min
Control mode: timing quantitative /DMX512 control
Gross weight: 11.3 kg
Net weight: 9.2kg
Product size: 72 × 28 × 26cm
Packing size: 74 × 38 × 30cm

SF-D003

1500W/1200WLED七彩烟机
1500W/1200W LED RGB Smoke Machine





技术参数

电压：AC110-220V 50-60Hz
功率：1500W / 1200W
预热时间：8分钟
镰刀菌容量：3.5公升
产量：6000立方英尺/分钟
喷雾距离：6-7米
产品尺寸：250X165X125mm
重量：5.5KG
灯珠：6X1W（单色）

Technical Parameters

Voltage: AC110-220V 50-60Hz
Power: 1500W/1200W
Warm-up time: 8 minutes
Lecythus Capacity: 3.5L
Output: 6000Cuft / Min
Spray distance: 6-7 meters
Product Dimensions: 250X165X125mm
Weight: 5.5KG
Lamp bead ：6X1W（monochromatic）

SF-D004

1500W烟机
1500W Smoke Machine





技术参数

电压：AC 230-240V 50 / 60Hz
功率：1500W
预热时间：8分钟
烟油容量：3.5升
油耗：6分钟/ L（100%输出）
烟雾覆盖：25000cu.ft / min
控制方式：遥控
净重：7.8公斤
尺寸：52 * 32.5 * 26cm

Technical Parameters

Voltage: AC 230-240V 50/60Hz
Power: 1500W
Warm-up time: 8 minutes
Smoke oil capacity: 3.5 liters
Fuel consumption: 6 minutes / L (100% output)
Smoke covered: 25000cu.ft/min
Control:remote control
N.W: 7.8kg
Size: 52*32.5*26cm

SF-D005

400W烟机
400W Smoke Machine





技术参数

电压：AC 230-240V 50 / 60Hz
功率：400W
预热时间：8分钟
烟油容量：3.5升
油耗：6分钟/ L（100%输出）
烟雾覆盖：25000cu.ft / min
控制方式：遥控
净重：7.8KG
尺寸：52 * 32.5 * 26cm

Technical Parameters

Voltage: AC 230-240V 50/60Hz
Power: 400W
Warm-up time: 8 minutes
Smoke oil capacity: 3.5 liters
Fuel consumption: 6 minutes / L (100% output)
Smoke covered: 25000cu.ft/min
Control:remote control
N.W: 7.8kg
Size: 52*32.5*26cm

SF-D006

600W双雾机
600WDouble Fog Machine





技术参数

电压：AC220V-240V 50 / 60Hz
极限保险：5A / 250V
功率：600W
桶容量：5ML
风扇角度：可调可调
输出风量调节：支持
DMX-512：支持支持
控制器：LCD控制器，遥控器
包装尺寸：590 × 50 × 450mm
重量：33.2kg

Technical Parameters

Voltage: AC220V-240V 50/60Hz
Limiting Insurance: 5A/250V
Power: 600W
Drum Volume: 5ML
Fan angle: Adjustable adjustable
Output Wind adjustment: Support
DMX-512: Support support
Controller: LCD controller, remote control
Packing size: 590 × 50 × 450mm
Weight: 33.2kg

SF-D007
1600W薄雾机
1600W Haze Machine





技术参数

电压:AC 100-240V 50/60Hz
功率:1600W
预热时间:1分钟
烟油量:3.5L
烟雾覆盖:8000cu.ft/min
控制:DMX，遥控器DMX
频道1:烟雾不断
DMX通道2:调整风扇
尺寸净重:18kg
尺寸:55*28*27cm

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Power: 1600 W
Warm-up time: 1 minute
Fluid Capacity: 3.5 L
Smoke Output: 8,000 cu. ft/min
Control: DMX, DMX Remote Control
Channel 1: Continuous Smoke
DMX Channel 2: Fan Speed Control
Dimensions/Net Weight: 18 kg
Dimensions: 55 x 28 x 27 cm

SF-D008
1200W薄雾机
1200W Haze Machine





技术参数

电压:AC 100-240V 50/60Hz
功率:1200W
预热时间:1分钟
烟油量:3.5L
烟雾覆盖:6000cu.ft/min
控制:DMX，遥控器DMX
频道1:烟雾不断
DMX通道2:调整风扇
尺寸净重:18kg
尺寸:55*28*27cm

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Power: 1200 W
Warm-up time: 1 minute
Fluid Capacity: 3.5 L
Smoke Output: 6,000 cu. ft/min
Control: DMX, DMX Remote Control
Channel 1: Continuous Smoke
DMX Channel 2: Fan Speed Control
Dimensions/Net Weight: 18 kg
Dimensions: 55 x 28 x 27 cm

SF-D009
900W薄雾机
900W Haze Machine





技术参数

电压:AC 100-240V 50/60Hz
功率:900W
预热时间:1分钟
烟油量:1.5L
烟雾覆盖:5000cu.ft/min
控制:DMX，遥控器DMX
频道1:烟雾不断
DMX通道2:调整风扇
尺寸净重:5kg
尺寸:23*23*19cm

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Power: 900 W
Warm-up time: 1 minute
Fluid Capacity: 1.5 L
Smoke Output: 5,000 cu. ft/min
Control: DMX, DMX Remote Control
Channel 1: Continuous Smoke
DMX Channel 2: Fan Speed Control
Dimensions/Net Weight: 5 kg
Dimensions: 23 x 23 x 19 cm

SF-D010
600W薄雾机
600W Haze Machine





技术参数

电压:AC 100-240V 50/60Hz
功率:600W
预热时间:1分钟
烟油量:1.5L
烟雾覆盖:3000cu.ft/min
控制:DMX，遥控器DMX
频道1:烟雾不断
DMX通道2:调整风扇
尺寸净重:5kg
尺寸:23*23*19cm

Technical Parameters

Voltage: AC 100–240 V, 50/60 Hz
Power: 600 W
Warm-up time: 1 minute
Fluid Capacity: 1.5 L
Smoke Output: 3,000 cu. ft/min
Control: DMX, DMX Remote Control
Channel 1: Continuous Smoke
DMX Channel 2: Fan Speed Control
Dimensions/Net Weight: 5 kg
Dimensions: 23 x 23 x 19 cm

SF-D011
3000W七彩气柱烟机
3000W RGB CO2 Jet Smoke Machine





技术参数

电压:AC100-240V/50/60HZ
功率:3000W
材质:不锈钢&铁
油量:3L
重量:6KG
尺寸:33*28*19CM

Technical Parameters

Voltage: AC 100–240 V / 50/60 Hz
Power: 3000 W
Material: Stainless steel & iron
Oil capacity: 3 L
Weight: 6 kg
Dimensions: 33 × 28 × 19 cm

SF-D012
1500W晨雾灯
1500W Haze Machine





技术参数

电压:AC100-120V 50/60Hz
功率:1500W
烟油容量:5升
烟雾覆盖率:3500cu.ft/MINL
控制:DMX，遥控器DMX
频道1:开启和关闭烟雾
DMX通道2:调整风扇
尺寸净重:20.5kg
尺寸:60*59*26.5cm

Technical Parameters

Voltage: AC 100–120 V, 50/60 Hz
Power: 1500 W
Fog fluid capacity: 5 liters
Fog coverage: 3,500 cu. ft./min
Control: DMX, DMX remote control
Channel 1: Turn fog on/off
DMX Channel 2: Adjust fan speed
Net weight: 20.5 kg
Dimensions: 60 x 59 x 26.5 cm

SF-D013
700W魔球烟雾机
700W Magic Ball Smoke Machine





技术参数

电源:AC100-240V，50/60Hz
功率:700W
光源:1颗魔球灯+9颗LEDd灯珠
油桶容量:150ML
控制方式:遥控控制
产品尺寸:215x120x115mm
重量:1.65kg

Technical Parameters

Power Supply: AC 100–240 V, 50/60 Hz
Power: 700 W
Light Source: 1 Magic Ball Light + 9 LED bulbs
Oil Tank Capacity: 150 mL
Control Method: Remote control
Product Dimensions: 215 x 120 x 115 mm
Weight: 1.65 kg

SF-D014
LED气柱烟机
LED CO2 Jet Smoke Machine





技术参数

电压:110-120V&220-230V
功率:250W
控制方式:DMX512
高压管:6米
射流高度:8-10米
包装重量:9.2KG
装箱尺寸:.4230*30cm

Technical Parameters

Voltage: 110–120 V & 220–230 V
Power: 250 W
Control: DMX512
High-voltage cable: 6 m
Jet height: 8–10 m
Packaging weight: 9.2 kg
Packaging dimensions: 4230 × 30 cm

SF-D015
1500W雪花机
1500W Snowflake Machine





技术参数

电压:AC 110/230V 50-60Hz+ 10%
功率:1500W
油桶容量:5L
雪花覆盖面积:60立方米
控制方式:遥控/线控/DMX512
控制净重:6.2kg
毛重:8.5kg
产品尺寸:52*26*30cm

Technical Parameters

Voltage: AC 110/230V, 50–60 Hz ±10%
Power: 1500W
Oil tank capacity: 5L
Snow coverage area: 60 cubic meters
Control method: Remote control /
Wired control / DMX512 control
Net weight: 6.2 kg
Gross weight: 8.5 kg
Product dimensions: 52 × 26 × 30 cm

SF-D016
大泡泡机
Large Bubble Machine





技术参数

电压:AC 110/230V 50-60Hz+10%
功率:300W
泡泡油容量:2.5L
泡沫保险范围:200m²
控制方式:遥控(30)米，远程(30)米，手动
净重:11kg
毛重:12.7kg
产品尺寸:50*38.5*43cm
包装尺寸:57*48.5*53.5cm

Technical Parameters

Voltage: AC 110/230V, 50-60Hz ±10%
Power: 300W
Foam concentrate capacity: 2.5L
Foam coverage: 200m²
Control methods: Remote control (30m),
wireless (30m), manual
Net weight: 11kg
Gross weight: 12.7kg
Product Dimensions: 50 x 38.5 x 43 cm
Packaging Dimensions: 57 x 48.5 x 53.5 cm

SF-D017
2500W喷射式泡沫机
2500W Jet Foam Machine





技术参数

功率:2500W
电压:AC110/220,50/60Hz
Comtrol:手动
发泡量:20CBM/min
油耗:40L/min
Ip:环保
重量:75kg
产品尺寸:130*68*110 cm

Technical Parameters

Power: 2500 W
Voltage: AC 110/220 V, 50/60 Hz
Control: Manual
Foam output: 20 CBM/min
Fuel consumption: 40 L/min
LP: Eco-friendly
Weight: 75 kg
Product dimensions: 130 × 68 × 110 cm

SF-D018
LED烟雾泡泡灯
LED Smoke Bubble Machine





技术参数

电源:220-240VAC/50-60Hz
油箱容积:1.2L
功率:900W
LED 数量:4 色(Red, Green,Blue, White)
LED颜色:48x3W3-in-1
DMX通道:8/DMX:自走模式/DMX
插口:3-pinXLR
控制方式:DMX、LCD显示屏、遥控
包装尺寸:45X35X46.5cm
重量:12.8KG

Technical Parameters

Power Supply: 220–240 VAC / 50–60 Hz
Tank Capacity: 1.2 L Power: 900 W
Number of LEDs: 4 colors (Red, Green, Blue, White)
LED Color: 48 x 3W 3-in-1
DMX Channels: 8 / DMX Mode: Auto / DMX
Connector: 3-pin XLR
Control Methods: DMX, LCD Display, Remote Control
Package Dimensions: 45 x 35 x 46.5 cm
Weight: 12.8 kg

SF-D019
喷火机
DMX Flame Machine





技术参数
电压:AC110/230V 50-60Hz+10%
功率:200W
火焰高度:1.5-3m
喷火时间:3秒
占地面积:1平方米
控制方式:DMX512控制/遥控
产品尺寸:55.5*24.5*21cm
包装尺寸:61.5*30*28.5cm
净重:4.7kg
毛重:5.8kg

Technical Parameters
Voltage: AC 110/230V, 50–60 Hz ±10%
Power: 200W
Flame height: 1.5–3 m
Flame Duration: 3 seconds
Footprint: 1 square meter
Control Method: DMX512 control / Remote control
Product Dimensions: 55.5 x 24.5 x 21 cm
Packaging Dimensions: 61.5 x 30 x 28.5 cm
Net Weight: 4.7 kg
Gross Weight: 5.8 kg

SF-D020
电子喷花机
Cold Spark Machine





技术参数
工作高度:1-5米
工作温度:-10°C-50°C
功率:400w3.6A(110V版本)
400w 1.8A(220V版本)
保险丝:110V/10A，220V/6A
控制:DMX
净重:9.5kg
尺寸: 230 * 195*300mm
最多连接数:6件

Technical Parameters
Operating Height: 1–5 meters
Operating Temperature: -10°C to 50°C
Power: 400W, 3.6A (110V version)
400W, 1.8A (220V version)
Fuse: 110V/10A, 220V/6A
Control: DMX
Net Weight: 9.5 kg
Dimensions: 230 × 195 × 300 mm
Maximum number of units: 6

SF-D021
椭圆形火焰灯
LED Oval Flame Effect Light





技术参数
功率:60-110W
控制方式:电源/遥控
火焰颜色:红色
电压:AC110V/220V
净重:4.75KG
产品尺寸:46.5X11X29cm
灯珠:进口LED灯珠(红色X28，蓝色X8)
适用场景:夜场/篝火晚会/酒吧/开业迎宾/婚庆餐厅/派对/商场/节日装饰/鬼屋

Technical Parameters
Power: 60–110W
Control: Power supply/Remote control
Flame color: Red
Voltage: AC 110V/220V
Net Weight: 4.75 kg
Product Dimensions: 46.5 x 11 x 29 cm
LEDs: Imported LEDs (28 red, 8 blue)
Suitable for: Nightclubs / Bonfire parties / Bars / Grand openings / Wedding venues / Restaurants / Parties / Shopping malls / Holiday decorations / Haunted houses

SF-D022
礼炮机和压缩机
High Pressure Air Compressor for Confetti



技术参数
电压: AC 110/230V 50-60Hz+ 10%
功率:150W
射击范围:10m-15m
尺寸:55*45*20.5cm
重量:6.15kg
产品尺寸:29*21*25cm
包装尺寸:37*29.5*24cm
净重:11.10kg
毛重:13.50kg

Technical Parameters
Voltage: AC 110/230V, 50–60 Hz ±10%
Power: 150W
Shooting range: 10–15 m
Dimensions: 55 × 45 × 20.5 cm
Weight: 6.15 kg
Product Dimensions: 29 x 21 x 25 cm
Packaging Dimensions: 37 x 29.5 x 24 cm
Net Weight: 11.10 kg
Gross Weight: 13.50 kg

SF-D023
DMX 大型彩纸机
DMX Large Confetti Machine





技术参数
产品名称：DMX 大型彩纸机
控制方式：手动控制
耗材：CO^2、彩纸
喷射距离：15 米
毛重：40 千克
包装尺寸：130*47*150 厘米
覆盖面积：约 300 平方米
产品包装：航空箱一体
使用场所：酒吧夜总会、商场开业、婚礼现场、奠基仪式、开业庆典房地产开发、明星演唱会等

Technical Parameters
Product name: DMX Large Confetti Machine
Control mode: Manual Control
Consumables: CO^2 Confetti
Jet Distance: 15m Gross weight: 40kg
Packing size:130*47*150cm
Coverage: about 300 square meters
Product Packaging: aviation box all in one
Use of places: bar nightclubs, shopping malls opening, wedding site, foundation ceremony, celebration start,real estate development,

SF-LED024
LED 1500W 摇头烟雾机
1500W RGB LED Moving Head Fog Machine





技术参数
电压： 110V/220V 50-60Hz
总功率： 1800W
频道： 16
LED 功率 四合一 LED
灯珠 10W * 15 可 用于染色效果
控制方式 DMX512, 自驱动、 无线遥控
喷射速度 5000 立方英尺/分钟,
预热 8 分钟电子液体外置水瓶
毛重： 16 千克
包装设计： 44*41*54 （厘米）

Technical Parameters
Voltage: 110V/220V 50-60Hz
Total power: 1800W Channels: 16
LED power: Four in one LED beads 10W * 15 can be used for dyeing effect
Control method: DMX512, Self driving, wireless remote control
Spray rate: 5000cuft/min Preheat for 8 minutes, external water bottle for e-liquid
Gross weight: 16KG
Packaging Design: 44 * 41 * 54 (cm)

SF-D025
3500W 干冰机
3500W Dry Ice Low Fog Machine



技术参数
电压:AC110V/220V，60Hz/50Hz
功率:220V 3500W/110V 2000W
加热时间:15分钟 最大连续输出:4-5分钟
电子温度控制:70℃~85℃
控制模式:手动 工作用水:10L
最大输出覆盖范围:150平方㎡
产品重量:8.85KG 运输重量:20.5KG
机器尺寸:42X36X40cm包装尺寸:49X45X46.5cm
耗材:柱状/颗粒干冰、水

Technical Parameters
Voltage:AC110V/220V,60Hz/50Hz
Power:220V 3500W/110V 2000W
Heating time:15 minutes Working water:10L
Electronic temperature control: 70°C~85°C
Control mode: manual
Maximum continuous output:4-5 minutes
Maximum output coverage: 150 square meters
Product Weight:8.85KG Transportation
Weight:20.5KG Machine Size:42X36X40cm
Package Size:49X45X46.5cm
Consumables:Pillar/pellet dry ice, water

SF-D026
LED CO2 彩纸枪
LED CO2 Confetti Gun





技术参数
功率： 150W 射程： 6-8 米 6-8 米
灯珠 RGB 彩色 3W * 4
耗材： 彩色纸片、二氧化碳
控制模式： 手动 重量： 6.0 千克
尺寸： 74.5 * 23.5 * 37（厘米）
适用于： 音乐会、户外活动、舞台、酒吧、和其他场所

Technical Parameters
Power: 150W Range: 6-8 meters
Lamp bead: RGB color 3W * 4
Consumables: colored paper sheets, carbon dioxide
Control mode: manual
Weight: 6.0kg
Size: 74.5 * 23.5 * 37 (cm)
Applicable to: concerts, outdoor events, stages, bars, and other venues

SF-D029
小型二氧化碳喷射纸屑机
Portable CO2 Confetti Jet Machine



技术参数
控制方式： 手动控制 耗材： CO^2、彩纸
喷射距离： 8-10 米
毛重： 23 千克
包装尺寸： 100*30*125 厘米
覆盖面积： 约 150 平方米
产品包装： 航空箱一体
使用场所： 酒吧夜总会、商场开业、婚礼现场、奠基仪式、开业庆典
房地产开发、明星演唱会等。

Technical Parameters
Product name： Mini co2 jet confetti machine
Control mode： Manual Control
Consumables： CO^2 Confetti
Jet Distance： 8-10m
Gross weight： 23kg Packing size:100*30*125cm
Coverage: about 150 square meters
Product Packaging: aviation box all in one
Use of places: bar nightclubs, shopping malls opening, wedding site, foundation ceremony, celebration start,
real estate development, star concerts, etc

SF-D027
LED CO2 喷枪
RGB LED CO2 Jet Gun





技术参数
功率： 50W 电压： 24 伏
射程： 8-10 米
光源： LED 三合一灯珠 LED 三合一灯珠
消耗品： 二氧化碳 二氧化碳
控制方式： 手动
尺寸： 65 * 6.5 * 15（厘米）
重量： 2.5 千克
适用于： 音乐会、户外活动
舞台、酒吧和其他场所

Technical Parameters
Power: 50W
Range: 8-10 meters
Light source: LED three-in-one lamp beads LED three-in-one lamp beads
Consumables: carbon dioxide carbon dioxide
Control mode: manual
Size: 65 * 6.5 * 15 (cm)
Weight: 2.5 kg
Voltage: 24 volts
Suitable for: concerts, outdoor events, stages, bars and other venues

SF-D031
LED手持烟雾枪
RGB LED Handheld Smoke Gun





技术参数
产品功率:1500W
产品电压:110v-220V50-60HZ
油壶容量:400ML
产品重量:8KG
包装重量:8.5KG
控制模式:手控喷烟
使用场地:舞台/婚庆/酒吧/ktv等

Technical Parameters
Product Power: 1500W
Product Voltage: 110V–220V, 50–60Hz
Oil Tank Capacity: 400 mL
Product Weight: 8 kg
Package Weight: 8.5 kg
Control Mode: Manual smoke release
Applications: Stages, weddings, bars, KTVs,

SF-D030
冷火花机枪
Handheld Cold Spark Machine Gun





技术参数
喷射距离： 1-5 米
喷射角度： 上下 180
待机时间： 约 60 分钟
连续喷射时间： 25 分钟
电池充电： 30-40 分钟充满
提供高速和低速喷射版本
可自行更换电池，建议连续使用 1-6 小时
连续使用

Technical Parameters
Spraying distance:1-5m
Spraying angle:up and down 180°
Standby life:approx.60 minutes
Continuous spraying life:25 minutes
Battery charge:30-40 minutes full
Available in high speed and low speed sprayversions
Self-replaceable batteries,recommended for 1-6hours of continuous use

SF-D033
3000W多角度烟雾机
3000W Multi-Angle Fog Machine





技术参数
电压:AC110-220V
功率:3000W
喷射距离:10M
调节角度:180度
控制模式:手控/摇控/DMX512
油桶容量:3L
净重:10KG
尺寸: 17cm*21cm*55cm
通用范围:酒吧迪厅/舞台表演/婚礼庆典/拍摄布景

Technical Parameters
Voltage: AC 110–220 V Power: 3000 W
Spray Distance: 10 m
Adjustment Angle: 180°
Control Modes: Manual/Remote Control/DMX512
Tank Capacity: 3 L Net Weight: 10 kg
Dimensions: 17 cm × 21 cm × 55 cm
Applications: Bars and nightclubs / Stage performances / Weddings and celebrations / Film and TV set design

SF-D032
电子礼炮枪
Handheld Electronic Confetti Launcher Gun



技术参数
电压:交流110-130V/60Hz
交流220-240V/50HZ 功率:600W
喷雾高度:1-4M(可调)
工作温度:-10°C~50°
重新加热时间:3分钟
控制:手动控制
耗材类:火花粉 净重:5KG
机器尺寸:380x160x280mm
包装尺寸:440x395x410mm

Technical Parameters
Voltage: AC 110–130 V / 60 Hz; AC 220–240 V / 50 Hz
Power: 600 W
Spray Height: 1–4 m (adjustable)
Operating Temperature: −10°C to 50°C
Reheating Time: 3 minutes
Control: Manual control Consumables: Fire powder
Net Weight: 5 kg
Machine Dimensions: 380 x 160 x 280 mm
Packaging Dimensions: 440 x 395 x 410 mm

China2EU

控台系列

Console Series



SF-E001

MA2 全尺寸(电动推杆)
MA2 Full Size Console
(Motorized Faders)



技术参数

Linux 操作系统
内置 2 个电动升降式 15.4 英寸工业全视角触摸屏、
1 个 9 英寸触摸屏
功能强大的 iSCPU、4G 内存、内置固态硬盘
6 个 DMX 输出端口,1 个复合 DMX 输入端口(可设置为输出)
NPU 最多可连接 65536 个通道
30 个带感应功能的电动重放推杆(60 毫米)80 个执行按钮
1 个总控制推杆、1 个调光轮
1 个可控 XY 轴高精度进口轨迹球
2 个 A/B 场电动推杆 (100 毫米)
7 个进口工业级耐磨编码器 (带推动功能)
2 个千兆以太网端口，支持 MA NET、ARTNET 等网络
5 个 USB 端口，1 个备用 USB 端口
2 个工作灯接口
2 个 DVI 接口，可扩展两个显示器
MIDI 输入和输出接口
内置 2 个抽屉，内置黄色背光机械键盘（背光亮度可调）
宽电压工业电源 100V-240V 50/60Hz
内置大功率 UPS 不间断电源
支持 RDM 功能

Technical Parameters

Linux operating system
Built-in 3 electric lifting 15.4-inch industrial full-view touch screen, 1 9-inch touch screen
powerful iSCPU, 4G memory, built-in solid state drive
6 DMX output ports, 1 composite DMX input port (can be set as output).
Up to 65536 channels can be connected to the NPU
30 electric replay faders with sensor function (60mm).
80 executive buttons
1 total control putter • 1 dimming wheel
1 controllable XY axis high precision imported trackball
2 A/B field electric push rods (100mm)
7 imported industrial grade wear-resistant encoders (with Push function)
2 Gigabit Ethernet ports, support MA NET, ARTNET, etc.
5 USB ports, 1 backup USB port
2 work light interfaces MIDI input and output interface
2 DVI interfaces, expandable two displays
Built-in 2 drawers, built-in yellow backlit mechanical keyboard (backlight brightness adjustable)
Wide-voltage industrial power supply 100V-240V 50/60Hz
Built-in high power UPS uninterruptible power supply
Support RDM function

SF-E002

MA2 双屏幕(电动推杆)
MA2 Lighting Console with Dual Screens & Motorized Faders



技术参数

Linux 操作系统
内置 2 个电动升降式 15.4 英寸工业全视角触摸屏、
1 个 9 英寸触摸屏
功能强大的 iSCPU、4G 内存、内置固态硬盘
6 个 DMX 输出端口，1 个复合 DMX 输入端口（可设置为输出）
NPU 最多可连接 65536 个通道
15 个带感应功能的电动重放推杆（60 毫米），50 个执行按钮
1 个总控制推杆，1 个调光轮
1 个可控 XY 轴高精度进口轨迹球
2 个 A/B 场电动推杆（100 毫米）
6 个进口工业级耐磨编码器（带推动功能）
2 个千兆以太网端口，支持 MA NET、ARTNET 和其他信号
5 个 USB 端口，1 个备用 USB 端口
2 个工作灯接口
2 个 DVI 接口，可扩展两个显示器
MIDI 输入和输出接口
内置 1 个抽屉，内置黄色背光机械键盘（背光亮度可调）
宽电压工业电源 100V-240V 50/60Hz
内置大功率 UPS 不间断电源
支持 RDM 功能

Technical Parameters

Linux operating system
Built-in 2 electric lift 15.4 inch industrial full-view touch screen, 1 9-inch touch screen
powerful iSCPU, 4G memory, built-in solid state drive
6DMX output ports, 1 composite DMX input port (can be set as output)
Up to 65536 channels can be connected to the NPU
15 electric replay faders with sensor function (60mm).
50 executive buttons
1 total control putter, 1 dimming wheel
1 controllable XY axis high precision imported trackball
2 A/B field electric push rods (100mm)
6 imported industrial grade wear-resistant encoders (with Push function)
2 Gigabit Ethernet ports, support MA NET, ARTNET and other signals
5 USB ports, 1 backup USB port
2 work light interfaces
2 DVI interfaces, expandable two displays
MIDI input and output interface
Built-in 1 drawer, built-in yellow backlit mechanical keyboard (backlight brightness adjustable)
Wide-voltage industrial power supply 100V-240V 50/60Hz
Built-in high power UPS uninterruptible power supply
Support RDM function

SF-E003

MA 三屏全尺寸
MA Full Size Lighting Console
(Triple Touchscreens)



技术参数

华硕主板，A:英特尔酷睿 i3 6100CPU，4G
内存;B 英特尔酷睿 i5 6500CPU，8G 内存，
金士顿 240g 固态硬盘，C 英特尔酷睿 i7 6700CPU，
16G 内存，金士顿 480g 固态硬盘，技嘉 GTX1660 6g
单机- 控制台内置 madrix3.6e、arkaos media master 5.0、
timelord2.1, beyond 2.03.0, MA3D, Wysiwyg3D-
1 个 9 英寸触摸屏
3 个 15.4 英寸电动升降宽屏触摸屏，
支持物理按钮关闭窗口和运行其他照明软件
9 英寸屏幕上的 X1-X20 User1 和 User2 按钮 LED 灯
可与程序同步点亮
支持 Art-net 网络扩展至 256 个域，所有信号均可输出，
无需 NPU- 1 个外部 HDMI 显示器
输入电压 110V ~ 220V 50 ~ 60Hz,内置大功率 UPS 不间断电源
内置 6 个 DMX-512 输出接口，1 个 DMX-512 输入接口，
最大可扩展 256DMX 输出端口，
高灵敏度轨迹球- 内置键盘抽屉- 1 个 LTC 时间码输入接口，
1 个 MIDI 时间码输入接口，
1 个主调光轮、4 个属性编码轮、1 个主推子、2 个 AB 推子
--30 个程序播放推子、50 个程序存储功能键
4 个 USB 接口、1 个音频接口、1 个网络接口、2 个工作灯接口
产品重量：90 千克 - 包装尺寸：137.5x33.5x85（长、宽、高）

Technical Parameters

Asus motherboard, A: Intel Core i3 6100CPU, 4G memory;
BIntel Core i5 6500CPU, 8G memory, SSD Kingston 240g,;
C Intel Core i7 6700CPU, 16G memory, SSD Kingston 480g,
Gigabyte GTX1660 6g alone• console has built-in madrix3.6e, arkaos media master 5.0,
timelord2.1, beyond 2.03.0, MA3D, Wysiwyg3D• 1 9-inch touch screen
three 15.4-inch electric lifting widescreen touch screens,
Display window fixed mouse cannot be dragged
Support physical buttons to close the window and run other lighting software
X1-X20 User1 and User2 button LEDs on the 9-inch screen can be illuminated in synchronization with the program
Support Art-net network expansion to 256 domains, all signals can be output without NPU• 1 external HDMI display
Input voltage: 110V ~ 220V 50 ~ 60Hz, built-in high-power UPS uninterruptible power supply
Built-in 6 DMX-512 output interfaces, 1 DMX-512 input interface, the maximum expansion can be 256DMX output port,
A highly sensitive trackball
Built-in keyboard drawer• 1 LTC time code input interface, 1 MIDI time code input interface,
1 master dimming wheel, 4 attribute encoding wheels, 1 master fader,
2 AB faders• 30 program playback faders, 50 program storage function keys
4 USB interfaces, 1 audio interface, 1 network interface, 2 work light interfaces
Product weight: 90KG
Packaging size: 137.5x33.5x85(length, width, height)

SF-E004

MA 双屏
MA Dual Screen Console



技术参数

华硕主板，A 英特尔酷睿 i3 6100CPU，4G 内存;
B 英特尔酷睿 i5 6500CPU，8G 内存，金士顿 240g 固态硬盘，
C 英特尔酷睿 i7 6700CPU，16G 内存，金士顿 480g 固态硬盘，
技嘉 GTX1660 6g 独立显卡- 控制台内置 madrix3.6e、arkaos media master 5.0/timelord2.1/beyond 3.0/MA3D/Wysiwyg3D、timelord2.1, beyond 3.0, MA3D, Wysiwyg3D
1 个 9 英寸触摸屏- 2 个 15.4 英寸电动升降宽屏触摸屏
显示窗口固定鼠标不可拖动
支持物理按钮关闭窗口和运行其他照明软件
9 英寸屏幕上的 X1-X20 User1 和 User2 按钮 LED 灯可
与程序同步点亮支持 Art-net 网络扩展至 256 个域，
无需 NPU 即可输出所有信号1 个外置 HDMI 显示器
输入电压：110V ~ 220V 50 ~ 60Hz，内置大功率 UPS 不间断电源
内置 6 个 DMX-512 输出接口，1 个 DMX-512 输入接口，
最可扩展 256DMX 输出端口，
高灵敏度轨迹球--内置键盘抽屉--1 个 LTC 时间码输入接口
1 个 MIDI 时间码输入接口，
1 个主控调光轮、4 个属性编码轮、1 个主控推子、2 个 AB 推子
5 个程序播放推子，30 个程序存储功能键- 4 个 USB 接口，
1 个音频接口，1 个网络接口，2 个工作灯接口
产品尺寸：111.5x33.5x85（长、宽、高）
净重：43 千克 毛重：69 千克

Technical Parameters

Asus motherboard,A: Intel Core i3 6100CPU, 4G memory
BIntel Core i5 6500CPU, 8G memory, SSD Kingston 240g,:
C Intel Core i7 6700CPU, 16G memory, SSD Kingston 480g,
Gigabyte GTX1660 6g alone• console has built-in madrix3.6e, arkaos media master 5.0,
timelord2.1, beyond 3.0, MA3D, Wysiwyg3D• 1 9-inch touch screen•
Two 15.4-inch electric lifting widescreen touch screens
Display window fixed mouse cannot be dragged•
Support physical buttons to close the window and run other lighting software
X1-X20 User1 and User2 button LEDs on the 9-inch screen can be illuminated in synchronization with the program
Support Art-net network expansion to 256 domains, all signals can be output without NPU• 1 external HDMI display
Input voltage: 110V ~ 220V 50 ~ 60Hz, built-in high-power UPS uninterruptible power supply
Built-in 6 DMX-512 output interfaces, 1 DMX-512 input interface, the maximum expansion can be 256DMX output port,
A highly sensitive trackball• Built-in keyboard drawer• 1 LTC time code input interface, 1 MIDI time code input interface,
1 main control dimming wheel, 4 attribute encoding wheels,
1 main control fader, 2 AB faders
5 program playback faders, 30 program storage function keys
4 USB interfaces1 audio interface, 1 network interface, 2 work light interfaces
Product size: 111.5x33.5x85 (length, width and height)
Net weight: 43KG gross weight: 69KG

SF-E005

MA 黑马
MA Compact Lighting Console



技术参数

工业级集成 1037U 主板，多屏控制图形 60GB 固态硬盘，
4GB 内存
内置两个 19 英寸高清分辨率触摸屏
内置后备电源（UPS），防止突然断电损坏系统
标配 6 个 DMX 输出端口和 MIDI 接口，3072 个 DMX 通道
支持 Artnet，可通过网络扩展输出
DMX 输出座采用原装瑞士斯蒙克座，标准 3XLR 座
运行流畅的 MA3D 软件，先进的渲染和染色软件
21 个程序回放推子，42 个程序存储功能键
1 个主控调光轮，4 个属性代码轮
1 个主推杆，2 个 AB 推杆
两个 VGA 视频信号输入接口
(可在控制台上显示外部信号源)
一个 HDMI 信号输出接口
(可扩展一个显示器)
液压屏幕角度调节支撑结构
产品尺寸：880*680*180
重量：34.85 千克)

Technical Parameters

Industrial-grade integration 1037U motherboard, multi-screen control graphics 60GB solid state drive, 4GB memory
Built-in two 19-inch HD resolution touch screens
Built-in backup power supply (UPS) prevents sudden power failure and damages the system
Standard 6 DMX output ports and MIDI interface, 3072 DMX channels
Support Artnet and expand the output through the network
DMX output seat adopts original Swiss New Quaker seat, standard 3XLR seat
Smooth running MA3D software advanced rendering\wysiwyg3d software for advanced dyeing
21 program playback faders, 42 program storage function keys
1 main control dimming wheel, 4 attribute code wheels
1 master pusher, 2 AB putters
Two VGA video signal input interfaces
(external signal source can be displayed on the console)
One HDMI signal output interface (extension of one display)
Hydraulic screen angle adjustment support structure
Product size: 880*680*180 Weight: 34.85KG

SF-E006

MA 笔记本
MA OnPC Lighting Control System
(Laptop Version)



技术参数

合金铝板数控雕刻+高精度激光钣金切割技术
+专业机械按钮+拉丝工艺，
多层复合喷油技术，超强度打磨，
中控台整体轻量化设计，流动更便捷，
英特尔（Intel）G4560 高端处理器、
120G 高速固态硬盘、4G 内存
19 英寸三星显示屏，进口电容式触摸屏和触摸板，
0 延迟自动切换，欠压、过压保护
1 个千兆网络接口、1 个 MIDI 输入、1 个 MIDI 输入
4 个属性编码轮（集成按钮功能）
1 个主推杆（60 毫米手动）
2 个程序储存器（100 毫米手动）
6 个程序播放推子（60 毫米手动）
12 个程序存储功能键，6 个执行按钮
6 个页面按钮，全媒体指令键盘
1 个 LTC 输入接口、2 个 DMX512 输出接口、
1 个 DMX512 输入接口（复合输出功能）
4 个 USB 端口（A 型），1 个备用 USB 输入接口（B 型）
1 个 MIC 音频输入接口，
尺寸：515*90*340 毫米，重量：9.1 千克

Technical Parameters

Alloy aluminum plate CNC engraving + high precision laser sheet metal cutting technology + professional mechanical button + drawing process,
Multi-layer composite fuel injection technology, super-strength grinding, overall light design of the console, and more convenient flow.
Intel (Intel) G4560 high-end processor, 120G high-speed solid state drive, 4G in-memory memory
19-inch Samsung display, imported capacitive touch screen and touchpad, 0 delay automatic switching, undervoltage, overvoltage protection
1 Gigabit network interface, 1 MIDI input, 1 MIDI input4 attribute coding wheel (integrated button function)
1 main putters (60mm manual) 2 program storage (100mm manual)
6 program playback faders (60mm manual)
12 program storage function keys, 6 execution buttons
6 page buttons, full specification command keypad
1 LTC input interface, 2 DMX512 output interfaces, 1 DMX512 input interface (composite output function)
4 USB ports (Type A), 1 spare USB input interface (Type B),
1 MIC audio input interface, Size: 515*90*340mm, weight: 9.1kg

SF-E007
MA 指挥机群
MA Style Control Server System

技术参数
实时控制 2048 个参数
6 个执行器（长度 60 毫米），18 个执行器
2 个 A/B 切换推子（长度 100 毫米）6 个执行按钮、
6 个页面按钮（通道/按键/按钮） 4 个编码轮
2048 个参数，最多 4096 个参数
2 个DMX 输出端口，1 个DMX 输入端口
1 个亮度调光轮
可调光按钮，带独立背光和调光功能
模拟信号远程输入接口
LTC 接口、MIDI 输入和 MIDI 输出接口
USB2.0 接口
宽电压（100-240VAC）电源轻巧便携，它坚固耐用，
重量仅为 6 千克，
命令按钮区域与调音台布局相似；即插即用，
只需连接电脑即可轻松实现调音台功能。
体积：63*57*26 厘米
毛重：12 千克



Technical Parameters
Real-time control of 2048 parameters
6 actuators (length 60mm), 18 actuators
2 A/B switching faders (length 100mm) 6 execution buttons,
6 page buttons (channel/push/button) 4 encoder wheels
2048 parameters, up to 4096 parameters
2DMX output port, 1DMX input port
1 brightness dimming wheel
Dimmable button with independent backlight and dimmable
Analog signal remote input interface
LTC interface, MIDI IN and MIDI OUT interface
USB2.0 interface
Wide voltage (100-240VAC) power supply is light and portable.
It is sturdy and weighs only 6KG.
The command button area is similar to the console layout;
plug and play, you can easily implement the console function
by simply connecting to a PC.
Volume: 63*57*26cm
Gross weight: 12KG

SF-E008
MA 推子翼
MA Fader Wing

技术参数
实时控制 2048 个参数
可扩展至 4096 个参数、4 个 DMX 输出、15 个执行器
（长度 60 毫米）
45 个执行推子按钮 15 个执行按钮，6 个页面按钮
（通道/按键/按钮）
USB2.0 接口，宽电压（100-240VAC）电源
可调光按钮，具有独立背光和可调光功能
轻巧、便携、坚固，仅重 4.5 千克，即插即用，
只需连接电脑，即可轻松实现控制台推子的功能
尺寸：46*42*14 厘米
重量：6 千克



Technical Parameters
Real-time control of 2048 parameters
Expandable to 4096 parameters, 4 DMX outputs, 15 actuators
(length 60mm)
45 execution fader buttons 15 execution buttons, 6 page buttons
(channel/push/button)
USB2.0 interface, wide voltage (100-240VAC) power supply
Dimmable button with independent backlight and dimmable
Lightweight, portable and sturdy, weighs only 4.5kg, plug and play,
just connect to the PC, you can easily achieve the function
of the console fader
Size: 46*42*14cm
Weight: 6KG

SF-E009
MA NPU
MA Network Processing Unit (NPU)

技术参数
实时计算，具有 8 个 DMX512 输出端口，
可同时控制多达 4,096 个控制参数
1 个内置触摸指示屏（7 "SVGA）
1 个千兆以太网接口
2 个 USB 2.0 连接接口
支持中英文操作界面
尺寸：45 × 41 × 14（厘米）



Technical Parameters
Real-time calculation, with 8 DMX512 output ports,
which can control up to 4,096 control parameters at the same time
1 built-in touch instruction screen (7 "SVGA)
1 Gigabit Ethernet interface
2 USB 2.0 connection interfaces
Support Chinese and English operation interface
Size: 45 × 41 × 14 (cm)

SF-E010
双屏老虎
Tiger Dual Screen Console

技术参数
强大的 Titan 9.1 操作系统、酷睿 i7CPU、金士顿 120GB
高速固态硬盘、金士顿 4GB 内存；控制台本身配有 12 个
光电隔离信号输出端口（6144 通道）；
内置两块 15.6 英寸高分辨率触摸屏(工业屏)
可通过控制台上的组合键在 0 至 125 个角度之间电动调节屏幕。
内置 UPS，无需 220V 外接电源即可启动，
台湾明纬开关电源稳定供电系统，支持中文菜单显示，
内置多国语言，支持屏幕涂鸦识别，支持与电脑设备联网，
控制各种灯光 3D 可视化软件；10 个百万级功能按钮，
让您更快地操作控制台；20 个播放推子，支持 1000 多个节目回放
强大的属性控制窗口、CMY/RGB 选色系统；支持 Art-Net 网络功能
快速易用的图形生成器，内置的图形分类更容易使用
支持 CIPT 协议，可以在控制台上直接看到媒体服务器
中媒体素材的图像缩略图，支持 Wi-Fi 接入，无线控制灯具
移动设备（iPhone、iPad Touch）远程控制灯具；
内置上千个灯库，内置灯库编辑软件，
可以随时在控制台上编辑灯库；
内置 Visualiser 线灯光可视化软件，想预先编程？
没问题！支持 MIDI 时间码声光同步功能，
还可以在控制台上播放音乐传输时间码，控制灯光程序播放。



Technical Parameters
Powerful Titan 9.1 operating system.Core i7CPU, Kingston 120GB high-speed
solid state drive, Kingston 4GB memory;The console itself is equipped with
12 photoelectric isolation signal output ports (6144 channels).
Built-in two 15.6-inch high resolution touch screens (industrial screen).
The screen can be electrically adjusted between 0 and 125 angles using the
key combination on the console. It also comes with a trackball mouse for easy
menu selection.Built-in UPS that can be started without 220V external power supply.
Taiwan Mingwei switching power supply stable power supply system,
Support Chinese menu display, built-in multi-language,
support for graffiti screen identification.Support networking to computer
equipment to control various lighting 3D visualization software;
10 megafunction buttons that allow you to operate the console faster;
20 playback faders, supporting more than 1000 program playback;
Powerful property control window, CMY/RGB color picker system;
support for Art-Net network functions.Quick and easy to use
graphics generator, the built-in graphics of the classification are easier
to use;Support CIPT protocol, you can directly see the image thumbnail
of the media clip in the media server on the console;Support Wi-Fi access,
wireless control lights, mobile devices (iPhone, iPad Touch) remote
control lamps;Built-in thousands of light libraries, built-in light library
editing software, you can edit the light library on the console at any time;
Built-in Visualiser line lighting visualization software, want to pre-program?
no problem!Support MIDI time code sound and light synchronization function,
you can also play music transmission time code in the console to control the
lighting program playback.

SF-E011
老虎触摸屏
Tiger Touch Lighting Console

技术参数
体积小巧、重量轻，携带方便，功能强大，
中小型剧场演出、巡演、娱乐场所首选内置闪存盘，
比硬盘更快更可靠，容量充足，可存储：
3000 多个灯具库，内置上百个图形扩展文件，
可移动记忆棒 3000 多个内置灯具库，
改进了选择和配置方法
查找新灯具上的一排按钮省略，缩短程序数，简化布局
2048 个 DMX512 通道
可为 120 台计算机配置不同的灯具地址码，
可为 120 个常规灯具配置不同的地址码
10 个回放推子，并包括影院控制方法 120 个内置图形
可保存 300 个表演节目的 MIDI 信号或场景或
低音、中音、高音语音触发表演节目
外置彩色 VGA 显示屏，采用钻石 4 控制台面板技术，
面板表面使用 PVC 贴纸，美观耐磨
毛重：30 千克
净重：12 千克
包装尺寸：730*530*310 毫米
产品尺寸：640*440*140 毫米



Technical Parameters
Compact, light weight, easy to carry, powerful, small and medium
sized theatrical performances, touring, preferred entertainment
venues built flash drive, faster and more reliable than hard drives,
adequate capacity, can store: 3000 more light than a hundred
built-in graphics library file extension removable Memory Stick 3000
over the built-in light fixture library improved selection and
configuration methods Find new lamps on the row of buttons putter
omitted to shorten the program drum, simplified layout
2048 DMX512 channel
120 computers can be configured to light different address codes
can be configured to 120 conventional fixtures different address code
10 playback faders, and includes theater control methods 120
built-in graphics Program saved 300 performances available MIDI
signal or scene or bass, midrange, treble voice trigger performance
program External color VGA display with diamond 4 console panel
technology panel surface using PVC stickers, beautiful and wearable
Gross Weight: 30kg Net weight: 12kg
Package size: 730*530*310mm Product size: 640*440*140mm

SF-E012
老虎触摸屏II
Tiger Touch II Lighting Console

技术参数
高性能酷睿双核 i5 处理器，主频 3.0G 金士顿 120GB
固态硬盘 4GB 内存，支持中文菜单显示，内置多国语言。
内置 15.6 英寸触摸屏，可扩展至外接 17 英寸触摸屏。
内置 USP 电源，可在不接入 AC 220V 的情况下正常工作 3 小时，
支持 Artnet，可扩展至 32768 个通道的 64 个 DMX 输出。
20 个回放推子支持 10,000 次虚拟回放。
强大的 CMY 调色板功能，支持涂鸦手写命名。
支持 CITP 协议，可预览服务器或数字灯的内置素材。
预留外部 WI-FI 接入点，
可使用 Ipod Touch 和 iPhone 进行远程控制。
内置 1000 多个世界主流灯具库和内置 Personacity Boilder
库编辑和书写软件。
内置 Visualiser 可视化舞台模拟软件，支持视频。
提供 MIDI 时间码控制，可通过 MIDI 远程控制播放按钮或推子。
内置像素映射和内置图形生成器。
毛重：40 千克净重：22 千克
包装尺寸：800*650*420 毫米
产品尺寸：660*550*195 毫米



Technical Parameters
High-performance Core Duo i5 processor, clocked at 3.0G Kingston
120GB solid state hard drive 4GB memory.Support Chinese menu display
and built-in multi-language.Built-in a 15.6-inch touch screen and can
be extended to an external 17-inch touch screen.
Built-in USP power supply, can operate normally for 3 hours without accessing AC 220V.
Supports Artnet and can be extended to 32768 channels of 64 DMX outputs.
10 macro buttons to edit any program.
The 20 playback faders support 10,000 virtual playbacks.
Powerful CMY palette features.Support for graffiti handwriting naming.
Support for CITP protocol to preview the built-in material of the server or digital light.
Reserve an external WI-FI access point for remote control using the Ipod
Touch and iPhone.
Built in more than 1000 world mainstream lamp library and built-in
Personacity Boilder library editing and writing software.
Built-in Visualiser visual stage simulation software to support video.
MIDI time code control is provided, and the playback button or fader is remotely
controlled by MIDI.Built-in pixel mapping and built-in graphics generator.
Gross total: 40KGNet weight: 22KG
Packing size: 800*650*420mmProduct size: 660*550*195mm

SF-E013
石英控制台
Quartz Console



技术参数
14.1寸屏幕，9.1 10.0 10.1 11.0 11.1五系统自由切换
系统采用ups供电，
默认输出为4 512，网络可输出12 512
英特尔酷睿I5处理器，120G固态硬盘，
4GB运行内存，90分钟ups电源，
内置4个DMX输出端口，2048通道；
支持Art-net网络输出，可扩展到
12个宇宙DMX通过网络输出；
支持泰坦网协议，可扩展到64个宇宙DMX输出
10个机械式翻页播放调节器；
20个自定义宏功能键
内置14.1英寸高亮触摸屏，可扩展
被泰坦战机的机翼击中
20个播放播放器，30个自定义宏功能，USB供电)
支持互机输出
1千兆网络接口，支持Art-net，Titan-net，
流CAN协议
与其他TITAN系统控制台性能文件兼容
纸箱尺寸：59x54x36（cm） 纸箱重量：13.3KG
飞行箱尺寸：59x54x29（cm） 飞行箱重量：22.8Kg

Technical Parameters
14.1-inch screen, 9.1 10.0 10.1 11.0 11.1 Five-system free switching
system with ups power supply.
The default output is 4 512, the network can output 12 512
Intel Core I5 processor, 120G solid state hard disk,
4GB running memory, 90 minutes ups power.
Built-in 4 DMX output ports, 2048 channels;
Support Art-net network output, which can be expanded to
12 Universe DMX outputs through the network;
Support Titan-net protocol, expandable to 64 Universe DMX outputs
10 mechanical page turning playback faders;
20 custom macro function keys
Built-in 14.1-inch highlight touch screen, which can be extended
by a Titan Fader wing
20 playback faders, 30 custom macro functions, USB powered)
Support headphone output
1 Gigabit network interface, support Art-net, Titan-net,
Streaming CAN protocols
Compatible with other TITAN system console performance files
Carton size: 59x54x36(cm)
Carton weight: 13.3KG
Flight case size:59x54x29 (cm)
Flight case weight: 22.8Kg

SF-E014
TNP
TNP



技术参数
NPU 网络处理器，
可将 TITAN 系统扩展到多达 64 个单元！
每个 NPU 处理器可处理 16 个灯具，
其中 12 个为 DMX512 物理输出，
另外 12 个通过 Art-net 输出，
每个输出都独立隔离并屏蔽，
适用于全系列的 Titan 系统控制台！
技术参数
16 个通用处理能力
12 个屏蔽隔离的 DMX512 物理输出端口
1 个千兆以太网接口
内置 UPS 不间断电源，Titan Net 集成于 Titan V9.1，
各接口提示区可显示当前控制台连接状态
高亮 800x600 状态设置监控触摸屏
英特尔 i5 处理器，4Gb 内存，SSD 系统硬盘
适用于所有泰坦系列控制台

Technical Parameters
NPU network processor, which can expand TITAN system to up
to 64 universes! Each NPU processor has the processing
capacity of 16 universes, of which 12 physical DMX512 outputs,
and the other 12 universes output through Art-net. Each output
is independently isolated and shielded, and is suitable for a full
range of Titan system consoles!
Technical Parameters:
Processing capacity of 16 universes
12 physical DMX512 with shielded isolated output ports
1 Gigabit Ethernet interface
Built-in UPS uninterruptible power supply.
Titan Net is integrated in Titan V9.1, each interface prompt area
can display the current console connection status
HighLight 800x600 status setting monitor touch screen
Intel I5 processor, 4Gb memory, SSD system hard drive
Suitable for all Titan series consoles

SF-E015
珍珠控制台
Pearl Console



技术参数
U 盘和软驱库
DMX512/1990 标准，2048 个 DMX 控制通道
四个光隔离独立驱动信号输出端口，
可抗 2000Vrms 电脉冲，
独立电源独立信号，最多可控制 240 个电脑灯和
40 个通道中的 240 个调光通道
320x240 大屏幕可显示所有操作、变化和输出
通道软分配
可储存 450 个程序
独立的系统锁定功能，防止误操作
内置世界知名灯库，使用更方便
机内固化多种特效程序，有效支持现场变化效果。
USB 存储器可高效存储现场数据
内置高性能绿色开关电源，90V-250V电压适应范围，
符合全球电源要求（可定制）
音频输入接口：HLR-D3Fx2
适用于室内外演出的专业工作灯
采用专业气箱包装，运输和表演安全方便

Technical Parameters
U disk and floppy drive library
DMX512/1990 standard, 2048 DMX control channels
Four opto-isolated independent drive signal output ports are resistan
to 2000Vrms electrical impulses.
Independent power supply independent signal, can control up to
240 computer lights and 240 channels of dimming in 40 channels
320x240 large screen shows all operations and changes and outputs
Channel soft allocation
Can store 450 programs
Independent system lock function to prevent misoperation
Built-in world-renowned light library is more convenient to use
A variety of special effects programs are solidified in the machine
to effectively support on-site change effects.
USB memory for efficient storage of field data
Built-in high-performance green switching power supply,
90V-250V voltage adaptable range,
in line with power requirements worldwide (customized)
Audio input connector: HLR-D3Fx2
Professional work lights for indoor and outdoor performances
Safe and convenient transportation and performance with
professional air box packaging

SF-E016
FOX 1024S 控制台
FOX 1024S console



技术参数
最大 1024 个 DMX 控制通道，DMX512/1990 标准，
光隔离信号输出端口。
最多可控制 120 个电脑灯或 120 个调光和 LED 灯通道。
使用灯库模式，每个灯最多 42 个控制通道。(R20 灯库)
配有属性通道推子，便于控制灯具。
最多可存储 300 个重放程序，分为 30 页。
具有 40 个直选场景，可同时叠加输出，可用作现场效果，
可控制和锁定。
通过内置图形，用户可以用电脑灯控制绘制、
波浪、光圈等效果、
亮度变化等多种效果，支持图形叠加、变形和扩展效果。
程序同步控制：可选内部速度、外部速度、音乐同步控制。
大屏幕 LED 显示，采用中/英文菜单操作模式。
带 USB 数据接口，支持 U 盘数据备份和系统升级。
专业鹅颈工作灯（选配）。
电源 AC100-240V 50/60Hz 15W，高性能绿色开关电源，
符合世界各国电源要求。
尺寸：482x400x108mm。

Technical Parameters
Maximum 1024 DMX control channels, DMX512/1990 standard,
optically isolated signal output port.
Maximum control of 120 computer lights or 120 channels of
dimming and LED lamps.
Up to 42 control channels per lamp, using the library mode.
(R20 light library)With a property channel fader
for easy control of the fixture.
The maximum storage 300 replay programs are divided into 30 pages.
With 40 direct selection scenes, the output can be superimposed
at the same time, which can be used as a live effect,
which can be controlled and latched.With built-in graphics,
users can control the effects with computer lights, such as drawing,
waves, aperture,A variety of effects such as brightness changes,
support for graphics overlay, deformation and expansion effects.
Program synchronization control: optional internal speed,
external speed, music synchronization control.
Large screen LED display, using the Chinese/English menu operation mode.
With USB data interface, support U disk data backup and system upgrade.
Professional gooseneck work light (optional).
Power: AC100-240V 50/60Hz 15W, high-performance
green switching power supply, in line with the power requirements of
countries around the world.
Size: 482x400x108mm.

SF-E017
迷你珍珠 1024 控制台
Mini Pearl 1024 console



技术参数
DMX512/1990 标准，多达 1024 个 DMX 控制通道，
光隔离信号
输出；最大可控制 96 个电脑灯或 96 个调光通道，
使用珍珠灯库；内置图形，
轨迹发生器内置 135 个图形，
方便用户控制电脑灯的图形轨迹。
如绘制圆圈、螺旋、彩虹、追逐等效果；图形参数
(如：振幅、速度、间隔、波浪、方向）可独立设置；
60 个重放场景，用于存储多步骤场
场景和单步场景，多步场景最多可存储 600 步；
带背光的 LED 显示屏，
中英文显示；关机数据保留，U 盘备份升级，
专业鹅颈工作灯，适
于室内表演使用（选配）
电源：AC100 240V/50-60HZ
尺寸：485x420x105CM

Technical Parameters
DMX512/1990 standard, up to 1024 DMX control channels,
optically isolated signals
Output: maximum control of 96 computer lights or
96 channels of dimming, using pearl light library; built-in graphics
The trajectory generator has 135 built-in graphics,
which is convenient for users to control the graphics trajectory of
the computer lights.
Such as drawing circles, spirals, rainbows, chasing and other effects;
graphic parameters (such as: amplitude, speed,
interval, wave, direction) can be set independently;
60 replay scenes for storing multi-step fields
Scene and single-step scenes, multi-step scenes can store up to 600
steps; LED display with backlight,
Chinese and English display; shutdown data retention,
U disk backup and upgrade,
professional gooseneck work light, suitable
For indoor performance use (optional).
Power supply: AC100 240V/50-60HZ; Size: 485x420x105CM

SF-E018
1024 控制台
1024 console



技术参数
DMX512/1990，多达 1024 个 DMX 通道，
光电隔离输出；最多可控制 96 个智能灯具或 96 个调光器；
内置形状发生器，
形状发生器可创建圆形、尖塔、彩虹等效果；
60 个回放可存储为追逐或场景；
追逐中最多可存储 600 个步骤；带背光的 LCD 显示屏；
12V 附件操作灯（可选）；
电源：AC 100-240V /50-60HZ；
尺寸：485*420*105cm；

Technical Parameters
DMX512/1990，Up to 1024 DMX channels,
output with optical isolated;Up to 96 intelligent
Fixtures or 96 Dimmers can be controlled;
Shape generator inside;
Shape generator can create effects such as circles,
spire, rainbow, etc;
60 Playbacks can be store as chase or scence;
Up to 600 steps can be store in chase;
LCD display with backlight ;12V
accessory operate light(OPTIONAL);
Power:AC 100-240V /50-60HZ
;SIZE:485*420*105cm;

SF-E019
1024B 控制台
1024B Console



技术参数
DMX512/1990，多达 1024 个 DMX 通道，光电隔离输出；
最多可控制 96 个智能灯具或 96 个调光器；
内置形状发生器；
形状发生器可创建圆形、尖塔、彩虹等效果；
60 个回放可存储为追逐或场景；
追逐中最多可存储 600 个步骤；带背光的 LCD 显示屏；
12V 附件操作灯（可选）；
电源：AC 100-240V /50-60HZ；
尺寸：485*420*105cm；

Technical Parameters
DMX512/1990 with up to 1024 DMX channels and optically isolated outputs;
Control of up to 96 smart fixtures or 96 dimmers;
Built-in shape generator;
Shape generator to create effects such as circles, spires, rainbows and more;
60 playbacks can be stored as chases or scenes;
Up to 600 steps can be stored in a chase;
LCD display with backlight;
12V accessory operating light (optional);
Power supply: AC 100-240V /50-60HZ;
Dimension: 485*420*105cm;

SF-E020
超级 512 控制台
SUPER 512 Console



技术参数
DMX512/1990 标准，512 DMX 通道，光隔离输出，
最多可连接 62 个智能灯具，每个灯具最多 36 个通道。
可为每个智能灯具动态分配 DMX 通道。
16 位 X/Y 控制可实现绝对精确的移动。
多达 80 个 SHAPE 生成器。提供 SHAPE 轨道控制，
可控制圆、线和 8 等形状的效果。可
选择触发模式 可选择触发模式：
音乐同步、自动、手动速度 6 个通道、62 个场景同时运行。
最多可同时选择 62 个智能灯具。
31 个 MACRO，可将不同手动、场景和追逐的运行
组合录制到 MACRO 中。提供 USB 接口，
每个 USB 闪存盘可记录控制器的全部数据，
带背光的 LCD 显示屏：
AC 90-250V / 50-60Hz，
尺寸：483 毫米 x 400 毫米 x 105 毫米

Technical Parameters
DMX512/1990 standard, 512 DMX channels, optically isolated outputs.
Up to 62 smart fixtures can be connected, with up to 36 channels per fixture.
DMX channels can be dynamically assigned to each smart fixture
16-bit X/Y control for absolutely precise movement
Up to 80 SHAPE generators. SHAPE track control available.
Shape control for circle, line and 8 shapes.
Selectable trigger modes Selectable trigger modes:
Music Synchronization, Auto, Manual Speed 6 channels,
62 scenes running simultaneously.
Up to 62 smart fixtures can be selected simultaneously
31 MACROs for recording different Manual, Scene and Chase runs into a MACRO.
Recording of different combinations of manual, scene and chase runs into MACROs. USB interface available.
Each USB flash drive can record all the data of the controller.
Backlit LCD display:
AC 90-250V / 50-60Hz.
Dimensions: 483 mm x 400 mm x 105 mm

SF-E021
384 控制台
384 Console



技术参数
DMX512/1990 标准，512 个 DMX 通道，带光隔离输出
可连接 30 个智能灯具，
每个灯具最多 32 个通道。6 个通道，
可同时连接 30 个场景，30 个通道，
每个通道最多 100 步。带背光的 LCD 显示屏
电源：AC 90-250V/50-60 Hz

Technical Parameters
DMX512/1990 standard, 512 DMX channels with opto-isolated outputs for up to 30 smart fixtures, up to 32 channels per fixture.
6 channels with opto-isolated outputs for up to 30 smart fixtures.
Up to 32 channels per fixture.
6 channels for 30 scenes simultaneously. 30 channels with up to 100 steps per channel.
Up to 100 steps per channel.
LCD display with backlight
Power supply: AC 90-250V/50-60 Hz

SF-E022
512 控制台
512 Console



技术参数
DMX512/1990 标准，512 个 DMX 控制通道，
光电隔离信号输出。同时，最多可控制 30 台电脑灯，
每台电脑灯最多有 32 个控制通道，
并可使用动态灯光地址设置。
内置图形轨迹发生器（SHAPE），
方便用户控制电脑灯的图形轨迹。
如绘圆、渐变圆、线条、8 字、波浪等效果。
图形参数（如速度、大小、扩展和方向）可独立设置。
有 30 种灯光行走程序，每种程序最多 100 步，
可选择自动速度控制、智能手动节拍
摆动或音乐同步控制。
可同时运行 6 个灯光漫步程序和 30 个预设场景，
30 个电脑灯可同时进行，配备记忆卡接口，
用户可使用记忆卡闪存卡保存自己的宝贵数据。
带背光的 LCD 显示操作参数，
关机数据保留，电源：AC90-250V / 50-60Hz
高性能绿色开关电源，
体积/重量：485 毫米 x 267 毫米 x 85 毫米

Technical Parameters
DMX512/1990 standard, 512 DMX control channels,
Optically and electrically isolated signal output,
At the same time, up to 30 computer lights can be controlled, each computer light up to 32 control channels, and can use dynamic light address settings.
Built-in graphic track generator (SHAPE), convenient for users to control the graphic track of the computer lights.
Effects such as drawing circles, gradient circles, lines, figure 8s, waves, etc.
Graphic parameters (such as speed, size, expansion and direction) can be set independently.
There are 30 light travel programs, each with up to 100 steps.
Choose from automatic speed control, intelligent manual beat swing or music synchronization control.
6 lightwalk programs and 30 preset scenes can be run simultaneously.
30 computerized lights can be run simultaneously. Memory card interface.
Users can use the memory card to save their valuable data.
Backlit LCD display of operating parameters.
Data retention on power off. Power supply: AC90-250V / 50-60Hz
High performance green switching power supply.
Volume/Weight: 485 mm x 267 mm x 85 mm

SF-E023
阳光512
Sunny512



技术参数
DMX512 数字输出，512DMX 控制通道
2 个光隔离独立驱动信号输出端口
可控制 32 台 16 通道电脑灯
1600 个走灯程序步数存储容量。48 个走灯程序，
每个程序最多 100 步。每个速度梯度参数，独立设置。
可选音乐同步或手动速度控制器，
可同时运行 4 个走灯程序、48 个场景，
并同时在 32 台电脑上操作灯笼，关机数据维护
DMX 信号输出连接器：XLR -3 F × 2
可选择 12V 鹅颈灯
电源 AC 100 - 240V 50 - 60Hz
尺寸：483 × 400 × 105（毫米）

Technical Parameters
DMX512 digital output,512DMX control channel
2 optically isolated independent drive signal output port
Can control 32 16 channel computer lamp
1600 go light program step storage capacity.
48 lights go programs, each program up to 100 steps.
Each speed gradient parameters, independent set.
Optional music synchronization or maneal speed contaol can be run at the same time 4 lights go procedures, 48 scenes, and at the same time on 32 computers operating lamp lantern.
Shutdown data maintain
DMX signal output connector: XLR -3 F × 2
Can choose 12V gooseneck lamp
Power: AC 100 – 240V 50 – 60Hz
Size:483 × 400 × 105(mm)

SF-E024
领航员 2000 控制台
Navigator 2000 Lighting Console



技术参数
最多可控制 40 个电脑灯
每盏灯最大通道数为 36
功能通道卷盘式设计，可同时控制 6 个通道
移动部分可提供相对和绝对两种控制方式，以获得最佳效果
SMPTE 同步
预置和记忆独立时间设置
40 个电脑灯程序、运行灯程序、预置和场景
可与 PC 连接进行数据传输
MID 输入/输出
内置麦克风音频输入
通用内置式 AL4 电源系统
尺寸：482*222*75 毫米
重量：3.8 千克

Technical Parameters
Can control up to 40computer lights
Each lamp maximum number of channels 36
Functional channel reel type design which can simultaneously control 6 channel
The moving part can be provided two kinds of control mode, relative and absolute , In order to obtain the best effect
SMPTE synchronization
Preset and memory independent time setting
40 computer lights program , running lights procedures , a preset and scenes
Can be connected with PC data transmission
The MID Input /output
Built in microphone audio input
Universal built – in type AL4 power system
Size:482 * 222 * 75mm
Weight:3.8kg

SF-E025
240 控制台
240 Console



技术参数
可控制 12 个 16 通道电脑灯
可存储 12 个场景、12 个程序
程序步数 40 步 480 步，程序总步数。
总通道 240
可调光通道 48 个，可分为控制、点控制、集中控制
LCD 液晶屏幕，16*2 字符
电压：220V + 10-50Hz
机身体积：长 483 * 宽 8 * 高 80(mm)
重量：4.35kg

Technical Parameters
Controls 12 16-channel computerized lights
12 scenes, 12 programs can be stored
Program steps 40 steps 480 total program steps.
Total channels 240
Dimmable 48 channels, can be divided into control, point control,
Centralized control
LCD liquid crystal screen, 16*2 characters
Voltage: 220V + 10-50Hz
Volume: L483 * W8 * H80(mm) Weight: 4.35kg

SF-E026
192控制台
192 Channel DMX Controller



技术参数
外置电源变压器标准 DMX512 信号 MIDI 输入/输出，
内置 MIC 语音输入,8/ 192 DMX 通道输出，
可控制 12 台电脑灯(每台 16 通道)
30 个软件库包含 240 组预设场景，
每个场景包含 8 组音效.6 个可编程预置程序，
可任意调用场景和更换场景,编程快速，带内存，
液晶显示，操作方便,4 个数码管显示可手动或 MIDI 远程控制 BLACKOUT 功能CHASES 编程和 CHASES 功能,可用于手动或使用 MIDI 远程控制。
输出延迟功能，可使用 FADETIME
电位器调节延迟时间,DMX 输出极性电源
电压：DC9V-12V。电源电流:不小于 300mA
外形尺寸:380×135×70MM 包装尺寸:482×178×73MM
皮带包装重量:2.5kg（mm）

Technical Parameters
External power supply transformer standard DMX512 signal MIDI IN / OUT,built-in MIC voice input , 8/ 192 DMX channel output , controlled 12 computer lights (each 16 channel) .
30 software library contains 240 groups of preset scenes , each scenes contains 8 groups of soundscape . 6programmable preset program , any call scene and a scene change .
Prongramming fast , with memory , liquid crystal display , convenient operation . 4 digital tube display . BLACKOUT function can be ysed to manually or MIDI remote contral .
CHASES programming and CHASES function , can be used to manually or using the MIDI remote control .
Output delay function , using FADETIME potentiometer adjustable delay time . The DMX output polarity power supply
Voltage:DC9V-12V.Power supply current: not less than 300mA
As size: 380 × 135 × 70MM size : 482 × 178 × 73mm
belt packaging weight : 2.5kg (mm)

SF-E027
8 通道 DMX 信号放大器
8 Way DMX Splitter & Amplifier



技术参数
电源：单相 AC220V±10%，频率 50HZ±5%。
路信号输入，通过独立电气隔离实现 8 路信号分配输出。
数字信号： DMX512,
接口类型： RS-485 及通过 RS-485 接口传输的各种数字信号。
信号连接插座：三芯音频正负插座。
尺寸：19"1U 有 4 种方式可供选择。

Technical Parameters
Power supply: single-phase AC220V±10%, frequency 50HZ±5%.
Road signal input, 8-way signal distribution output through independent electrical isolation.
Digital signals: DMX512, interface type: RS-485 and various digital signals transmitted by RS-485 interface.
Signal connection socket: three-core audio positive and negative socket.
Size: 19*1U There are 4 ways to choose from.

SF-E028
智能 RDM 八路信号放大器
8 Way RDM Signal Distributor with Amplifier



技术参数
电压 交流 85 伏-264 伏 50/60 赫兹
最大功耗 10W
重量： 2.5KGS
协议：RDM/DMX512 RDM/DMX512
兼容 MA2 调光台或其他 DMX512 控制台
信号：1 路 DMX512 输入 8 路 DMX512 输出
尺寸 480x45x170 机架式（标准 1U）

Technical Parameters
Voltage: AC 85V-264V 50/60HZ
Maximum power consumption: 10W
Weight: 2.5KG
Agreement: RDM/DMX512
Compatible with: MA2 dimming station or other DMX512 console
Signal: one DMX512 input eight-way DMX512 output
Dimensions: 480x45x170 rack type (standard 1U)

SF-E029
光电隔离八路信号放大器
Photoelectric isolation eight-way signal amplifier



技术参数
8 路独立放大驱动输出
信号放大整形功能，延长信号传输距离
增强数据总线接入设备数量的能力，
保护灯光控制台的 DMX512 输出接口
故障点隔离，提高数字灯光控制系统的安全运行可靠性
电源 AC90-V, 50/60Hz
净重：1.8 千克 毛重：2.2 千克
体积：19"1U 530 x 180 x 100 毫米

Technical Parameters
8-way independent amplification drive output
Signal amplification shaping function to extend the signal transmission distance
Enhance the ability of data bus access to the number of devices and protect the DMX512 output interface of the lighting console,
Fault site isolation to improve the safe operation reliability of the digital lighting control system
Power supply: AC90-V, 50/60Hz
Net weight: 1.8kg
Gross weight: 2.2kg
Volume: 19*1U 530 x 180 x 100mm

SF-E041
4路防水放大器
Way Waterproof DMX Splitter & Amplifier



技术参数
数码信号类型：DMX512,以及采用RS—485接口传输的数码信号
1路信号输入，1路直通信号输出
（信号输入与直通信号之间有经电气隔离）
4路经电气隔离的信号分配输出
接口类型：RS-485
信号连接插座：采用3芯带屏蔽防水接头
采用防水防锈的铸铝机箱
防水等级：IP65
输入对输出的电气隔离耐压：＞AC300V
供电电源：AC90V~240V, 50Hz / 60Hz，15W
产品尺寸: 20*19*7.5CM 安装孔距: 9.5CM。
重量：1.9kg

Technical Parameters
Digital Signal Types: DMX512 and digital signals transmitted via RS-485 interface
1 signal input, 1 direct communication output (electrically isolated from the signal input)
4 electrically isolated signal distribution outputs
Interface Type: RS-485 Waterproof Rating: IP65
Signal Connection Socket: 3-pin shielded waterproof connector
Waterproof and rust-resistant die-cast aluminum housing
Electrical Isolation Withstand Voltage (Input to Output): >300 VAC
Power Supply: 90 VAC~240 VAC, 50 Hz / 60 Hz, 15 W
Product Dimensions: 20 × 19 × 7.5 cm
Mounting Hole Spacing: 9.5 cm Weight: 1.9 kg

SF-E030
网络扩展器（八个端口）
8 Port Ethernet Network Switch for Lighting Control



技术参数
网络信号 ART NET TCP IP
信号通道数 8 个 DMX512 输出和输入
工作电压 交流 100 伏 ~ 240 伏 47 / 60 赫兹
重量:毛重 2.08KG 净重 2.3KG 毛重 2.08 千克 净重 2.3 千克
特点: 1. 软件自主研发绝非抄袭
CPU采用先进的ARM Cortex-m4
各输出信号独立光电隔离，隔离电源 2000V DC
控制台支持所有 ART NET 网络协议，
如 Pearl Expert/Touch Tiger/MA/Flying Pig 等。
可将传统 DMX512 信号转换为 ART NET 网络信号。
信号输出卡座采用瑞士 NEUTRIK 原装三芯卡座（可选五芯卡座）
设备固件可通过 U 盘或网络升级
可通过液晶屏或网络设置系统参数。
拉丝铝合金外壳，标准 1U 19 英寸机架安装

Technical Parameters
Network signal: ART NET TCP IP
Number of signal channels: 8 DMX512 outputs and inputs
Working voltage: AC 100V ~ 240V 47 / 60HZ·
Weight: Gross weight 2.08KG Net weight 2.3KG
Features:1. Software independent research and development is not a copy CPU adopts advanced ARM Cortex-m4.Independent optical isolation of each output signal, isolated power 2000V DC Console supporting all ART NET network， protocols, such as Pearl Expert, Touch Tiger, MA, Flying Pig, etc. can convert conventional DMX512 signals into ART NET network signals.The signal output card holder adopts the original Swiss NEUTRIK three-core seat (optional five-core seat)the device firmware can be upgraded through a U disk or networkSystem parameters can be set via LCD screen or network.brushed aluminum alloy shell, standard 1U 19 inch rack mount

SF-E031
DMX2024 控制台
DMX2024 Console



技术参数
DMX512/1990 标准 504 通道；带背光的 LCD 显示屏，
最多可连接 20 台扫描仪，每台扫描仪最多可连接 24 个通道，24 个调光通道；8 个滑块，
用于手动控制通道；可分配的操纵杆，便于移动；
24 个通道循环运行、每个通道最多 40 步；
可同时运行 8 个通道；960 个通道；
交叉时间范围： 0s-25.5s；速度时间范围： 0.1s-25.5s；
每个追逐速度和交叉时间可自动保存；
512K 大容量存储卡；
数据自动保存；DMX 信号输出接口： XLR-D3F；
电源： DC9V 1000mA；
尺寸：485mm×250mm×91mm 净重：3.8 千克

Technical Parameters
DMX512/1990 Standard 504 channels; LCD display with backlight, up to 20 scanners, up to 24 channels per scanner
24 dimmer channels; 8 sliders for manual control of channels; assignable joystick for easy movement;
24 channels cycle through, Up to 40 steps per channel;
8 channels can run simultaneously; 960 channels;
Crossover time range: 0s-25.5s;
speed time range: 0.1s-25.5s;
Each chase speed and crossover time can be saved automatically; 512K large capacity memory card;
Data is saved automatically;
DMX signal output interface: XLR-D3F;
Power supply: DC9V 1000mA ;Net weight: 3.8kg
Dimension: 485mm×250mm×91mm

SF-E032
384 控制台
384 Console



技术参数
DMX512/1990 标准；共有 384 个输出通道；
30 个库有 8 个可编程场景；16 个滑块用于手动控制通道；再次通电时可连续运行上一个通道或库；对库进行 Midi 控制、
录制多达 6 个带渐变时间和速度的可编程通道；
LED 功能和程序显示；内置麦克风，
用于音乐触发；自动模式程序由渐变时间滑块控制；DMX 输入/输出： 3 针公头/母头 XLR； LED 灯连接器；
电源输入： DC 9V 1000mA；
尺寸 520 毫米×183 毫米×73 毫米；
净重： 2.6 千克

Technical Parameters
DMX512/1990 standard; total of 384 output channels;
30 banks with 8 programmable scenes; 16 sliders for manual control of channels; continuous operation of the previous channel or bank when powering up again;
Midi control of banks, recording of up to 6 programmable channels with fade time and speed;
LED function and program display; built-in microphone for music triggering; auto mode program controlled by fade time slider;
DMX I/O: 3-pin male/female XLR; LED light connector;
Power input: DC 9V 1000mA;Net weight: 2.6 kg
Dimensions 520 mm x 183 mm x 73 mm;

SF-E033
768 控制台
768 Console



技术参数
DMX512/1990 标准，
多达 768 个 DMX 控制通道，
两个光隔离信号输出，
可控制多达 32 个扫描器或 32 个自动生成的调光通道 Lightbank 背光 LCD 显示屏，
首创中英文显示切换界面
面板有中英文两种版本 面板有英文和中文两种版本 内置图形轨迹生成器，
内置 135 种图形，用于用户控制扫描仪轨迹，如圆形、螺旋形、彩虹形。

Technical Parameters
DMX512/1990 standard,
up to 768 DMX control channels, two optically isolated signal outputs to control up to 32 scanners or 32 auto-generated dimming channels
Lightbank backlit LCD display, the first Chinese and English display switching interface
Panel is available in English and Chinese.
The panel is available in English and Chinese.
Built-in graphic trace generator with 135 built-in graphics for user control of scanner traces, e.g. circles, spirals, rainbows.

SF-E034
256A 控制台
256A Console



技术参数
DMX512/1990 标准，最多 256 个 DMX 控制通道，全部为光隔离信号输出。
最大可控制 16 个扫描器或 64 个调光器。
自动生成灯光库背光 LCD 显示屏，
首创中英文显示可切换界面。
面板提供中英文两种语言。
内置图形轨迹生成器，
内置 35 个图形，
方便用户通过电脑灯控制图形轨迹，
如绘制圆圈、螺旋、彩虹、追逐等效果。
产品尺寸： 480*220*75 净重： 3.7KG
电源： AC 100 -240V/50-60Hz

Technical Parameters
DMX512/1990 standard, up to 256 DMX control channels, all optically isolated.
Maximum control of 16 scanners or 64 dimmers.
Automatic generation of light library backlit LCD display.
The first Chinese and English display switchable interface.
The panel provides both Chinese and English languages.
Built-in graphic track generator.
Built-in 35 graphics, convenient for users to control the graphic track through the computer lights, such as drawing circles, spirals, rainbows, chases and other effects.
Product size: 480*220*75 Net weight: 3.7KG
Power supply: AC 100 -240V/50-60Hz

SF-E035
迷你 54 控制台
Mini 54 Console



技术参数
控制台遵循 DMX512 国际标准协议,可以控制该协议支持的所有灯光,如摇头灯,星形屏幕和各种 384ConsOlePAR 灯光。
它只有 54 个通道。使用时请注意,同一网络中最多可有 54 个通道。例如： 普通电脑灯只有 16 个通道，同-网络只能串灯。
(16X3=48 个频道，少于 54 个频道)
54 个频道可保存 9 个节目，
每个节目可保存 50 个场景支持断电记忆支持 9V 万用表电池供电

Technical Parameters
The console follows the DMX512 international standard protocol and can control all the lights supported by this protocol, such as moving heads, star screens and various 384ConsOlePAR lights.
It has only 54 channels. Please note that there can be up to 54 channels in the same network.
For example: Normal computer lights only have 16 channels, the same network can only string lights.
(16X3=48 channels, less than 54 channels) 54 channels can save 9 programs, each program can save 50 scenes
Support power failure memory support
9V multimeter battery power supply

SF-D042
32通道迷你小控台
32-Channel Mini Mixing Console



技术参数
1.供电:4节5号电池/5VTYPE-C接口供电;
2.输出:三芯卡侬头&RJ45网口,
输出标准DMX512信号;3.配置:8推杆,
4个页面选择按键，共32通道可控制;
4.显示:三位数码管，显示当前通道数值;
5.功能:带BLACK输出、通道数值清0功能;
6.尺寸: 175*95*52MM;
7.净重:530g(带电池630g,需自购电池)

Technical Parameters
1. Power Supply: 4 AA batteries or 5V Type-C port;
2. Output: 3-pin XLR connector & RJ45 Ethernet port, outputting standard DMX512 signals;
3. Configuration: 8 faders, 4 page selection buttons, totaling 32 controllable channels;
4. Display: 3-digit LED display showing current channel values;
5. Features: Includes BLACK output and channel value reset function; 6. Dimensions: 175 x 95 x 52 mm;
7. Net weight: 530 g (630 g with batteries; batteries must be purchased separately)

SF-D043
DMX32通道无线带编程小控台
DMX 32-Channel Wireless Programmable Mini Console



技术参数
1.产品型号:DMX-32S
2.供电电压:5VType-C接口供电
3.内置电池:3000mAH电池
4.输出信号:三芯卡侬头标准DMX512信号
5.产品配置:8推杆，4个页共32通道
6.数码显示:4位数码管显示当前通道数值
7.产品功能:可编程保存，带无线发送，黑场模式
8.产品尺寸:180x94x35(MM)
9.产品净重:320g

Technical Parameters
1. Product Model: DMX-32S
2. Power Supply: 5V via Type-C port
3. Built-in Battery: 3000mAh battery
4. Output Signal: Standard DMX512 signal via 3-pin XLR connector
5. Product Configuration: 8 faders, 4 pages totaling 32 channels
6. Digital Display: 4-digit LED display showing current channel value
7. Product Features: Programmable and saveable, wireless transmission, blackout mode
8. Product Dimensions: 180 x 94 x 35 mm
9. Product Net Weight: 320 g

SF-D044
512通道迷你小控台
512-Channel Mini Control Console



技术参数
1.供电:4节5号电池/5VTYPE-C接口供电;
2.输出:三芯卡侬头&RJ45网口，输出标准DMX512信号;
3.配置:8推杆，4个选择按键，共512通道可控制;
4.显示:三位数码管，显示当前通道数值;
5.功能:带BLACK输出、通道数值清0功能;
6.尺寸: 175*95*52MM;
7.净重:530g(不带电池)

Technical Parameters
1. Power Supply: 4 AA batteries or 5V Type-C port;
2. Output: 3-pin XLR connector & RJ45 Ethernet port, outputting standard DMX512 signals;
3. Configuration: 8 faders, 4 selection buttons, supporting a total of 512 channels;
4. Display: 3-digit LED display showing current channel values;
5. Features: Includes BLACK output and channel value reset function;
6. Dimensions: 175 x 95 x 52 mm;
7. Net Weight: 530 g (without batteries)

SF-E036
无线发射器
Wireless DMX512 Transmitter



技术参数
2.4 无线 DMX512 收发模块 无线传输标准
DMX512 数据，以及灯具与灯具之间的在线数据传输 该产品彻底解决了调光台与灯具之间、灯具与灯具之间的数据无线传输问题，彻底消除了对双绞线的长期依赖，数据传输过程无延迟，数据实时可靠!
尺寸:75x147x43cm 重量:360g

Technical Parameters
2.4 Wireless DMX512 transceiver module wirelessly transmits standard DMX512 data, as well as transmits online data between lamps and luminaires
The product completely solves the problem of wireless transmission of data between dimming stations and lamps, between lamps and lamps, completely eliminating the long-term dependence on twisted pair wires, no delay in the process of data transmission, real-time reliable data!
Dimensions:75x147x43cm Weight:360g

SF-E037
12 路直通电源箱 4KW
12 Way Power Distribution Unit (4KW, Direct Output)



技术参数
规格：单相、三相通用
单位功率：12 路*4 千瓦
主要功能：12 路开关输出，40A 空气开关
体积：430*450*180 毫米
净重：12.5 千克
毛重：15 千克

Technical Parameters
Specification: single-phase, three-phase universal
Power per unit:12 way*4KW
Main function:12-way switch output, 40A air switch
Volume:430*450*180mm
Net weight:12.5kg
Gross weight:15kg

SF-E038
12 路电源箱
12 Way Power Distribution Unit



技术参数
规格：单相、三相通用
单位功率：12 路*4 千瓦
主要功能：12 路开关输出，40A 空气开关
体积：430*450*180 毫米
净重：12.5 千克
毛重：15 千克

Technical Parameters
Specification: single-phase, three-phase universal
Power per unit:12 way*4KW
Main function:12-way switch output, 40A air switch
Volume:430*450*180mm
Net weight:12.5kg
Gross weight:15kg

SF-E039
无线 DMX512 接收器
Wireless DMX512 Receiver



技术参数
功耗： 最大 DC500 V
通信距离：500 米（开放空间，因环境而异）
尺寸：120x30x30 毫米（含）
重量：100 克。
可设置 7 个 ID 码，7 组无线网络用户可在互不干扰的环境中独立使用
独立使用的干扰场所
标准 DMX512 三核接口

Technical Parameters
Power consumption: Maximum DC500 V
Communication distance:500 metres (open space, varies by environment)
Dimensions:120x30x30mm(with)
Weight:100g.Can be set to 7 ID codes, 7 groups of wireless network users can use each other independently in a non-interferencedisturbed place to use each other independentlyStandard DMX512 Tri-Core Interface

SF-E040
太阳光2
Sunlite2




技术参数
专业 USB-DMX 转换器 3 个 DMX 输出 (1536 个通道)
DMX 输入/输出可任意配置，通过 128MB miniSD 卡扩展内存，断开与电脑的连接
可支持两个 DMX 输出。SUNLITE SUITE2
随 SUNLITE SUITE 提供，该软件于 2009 年底推出，可与 EASY STAND ALONE 和 ESA PRO 软件一起使用
兼容 32 位或 64 位 Windows XP/VISTA/SEVEN 操作系统。

Technical Parameters
Professional USB-DMX converter 3 DMX outputs (1536 channels)
DMX input/output arbitrary configuration
through the 128MB miniSD card to expand the memory, disconnected from the computer to support two DMX outputs. Multiple zone programmes can be run simultaneously and independently.
SUNLITE SUITE2 is supplied with the SUNLITE SUITE,



屏室内P2.97
P2.97 Led Indoor

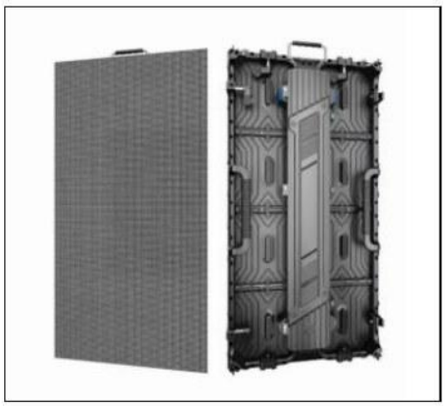

屏室外P3.91
P3.91 Led Outdoor



P3.91透明LED显示屏
P3.91 Transparent LED Screen















信号线
Signal Line



玻璃球
Glass Ball



保险绳+灯钩
Insuran Rope+Light Hook

灯钩
Light hook



彩纸
Confetti




电机
motor





电源
Power

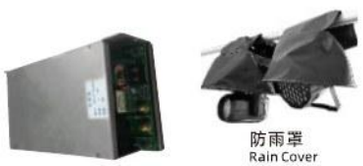

防雨罩
Rain Cover



烟油
Smoke Oil



双雾烟油
Double fog Smoke oil

溥雾烟油
Haze Machine Smoke oil

Dj烟油
DJ Smoke oil

P油
P Smoke oil

泡泡油
Bubbue Oil

雪花油
Smoke oil

灯架
Light House



温州吉雨国际贸易有限公司

WENZHOU JIYU INTERNATIONAL TRADE CO., LTD

Contact Us 联系我们

REGISTERED OFFICE 注册地址

Room 410, 4th Floor, Building D, No. 823, Wenzhou Avenue,
Puzhou Street, Longwan District, **Wenzhou City**, Zhejiang Province, P.R. China

YIWU OFFICE 义乌办公室

Room 405, Block A, Parkway Technology Innovation Park, No. 233,
Qihang Road, Houzhai Street, **Yiwu City**, Zhejiang Province, P.R. China

EMAIL	**info@china2eu.tech**
WEB	**www.china2eu.tech**
PHONE	**+86 182 5773 2903 · +86 153 2597 3310** WhatsApp · WeChat · Viber
HOURS	Mon–Fri 9:00–18:00 (CST)

FREE FOR IMPORTERS

Chinese trade fair calendar — **china2eu.tech/en/exhibitions**
Public holidays in China — **china2eu.tech/en/holidays**

China2EU
china2eu.tech

梦想 · 相信 · 实现

DREAM · BELIEVE · ACHIEVE



China2EU

china2eu.tech

梦想 · 相信 · 实现

DREAM · BELIEVE · ACHIEVE

温州吉雨国际贸易有限公司

WENZHOU JIYU INTERNATIONAL TRADE CO., LTD

china2eu.tech